

## Filterless enclosure cooling unit



## Description

<b>Order Number:</b>	0906097795
<b>Brand Name:</b>	SLIMLINE
<b>Housing Material:</b>	Mild steel, RAL 7037
<b>IP protection class to EN 60 529:</b>	IP 55
<b>SK notes:</b>	Krones
<b>Approvals:</b>	CE, cURus, cULus

## Technical Data


<b>Cooling capacity L35L35 (EN14511-3):</b>	320 W @ 50 Hz 330 W @ 60 Hz
<b>Cooling capacity L35L50 (EN14511-3):</b>	140 W @ 50 Hz 150 W @ 60 Hz
<b>EER L35L35:</b>	1.0
<b>Compressor type:</b>	Rotary piston compressor
<b>Refrigerant / GWP:</b>	R 513A / 630
<b>Refrigerant charge:</b>	105 g / 3.7 oz
<b>High / low Pressure:</b>	35 / 30 bar 290 / 188 psig
<b>Air flow volume (system / unimpeded):</b>	Ambient air circuit: 170 / 250 m <sup>3</sup> /h Cabinet air circuit: 125 / 250 m <sup>3</sup> /h
<b>Operating Temperature Range:</b>	+20°C - +50°C
<b>Mounting:</b>	Wall mounted / recessed
<b>Dimensions A x B x C (D+E):</b>	520 x 270 x 120 mm
<b>Weight:</b>	13 kg
<b>Cut out dimensions:</b>	501 x 251 mm
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>UL Voltage / Frequency:</b>	230 V ~ 60 Hz
<b>Current L35L35:</b>	1.6 A @ 50 Hz 1.5 A @ 60 Hz
<b>Starting current:</b>	3.2 A
<b>Max. current:</b>	2.3 A
<b>Nominal power L35L35:</b>	330 W @ 50 Hz 330 W @ 60 Hz
<b>Max. power:</b>	380 W
<b>Fuse:</b>	6 A (T)
<b>Short-circuit current rating:</b>	5 kA
<b>Rated current compressor:</b>	3.1 A
<b>Full load current fans:</b>	2.3 A
<b>Connection:</b>	Connection terminal block

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SLIMLINE - filterless cooling units](#)

**Performance graph:**

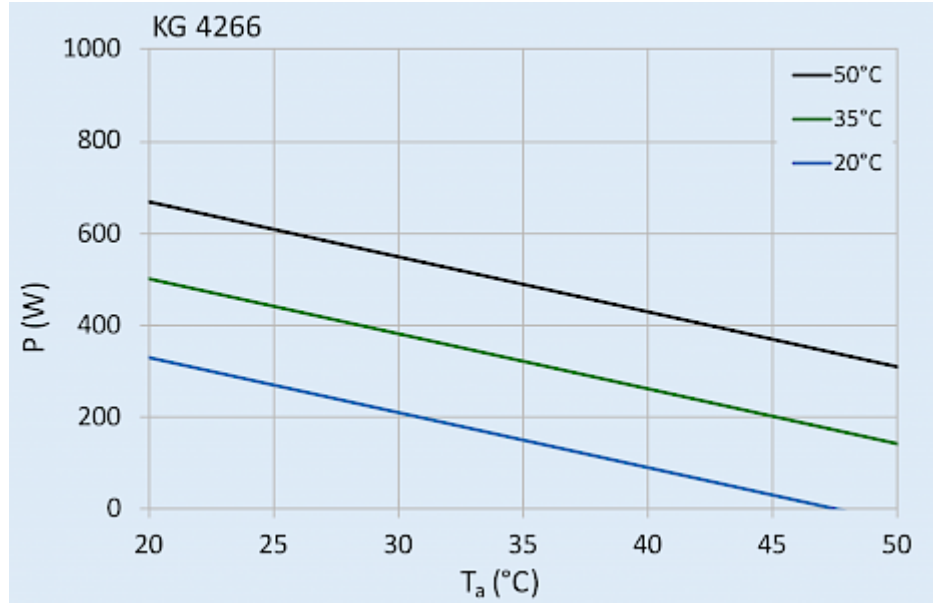


[click image to enlarge](#)

**Air flow:**

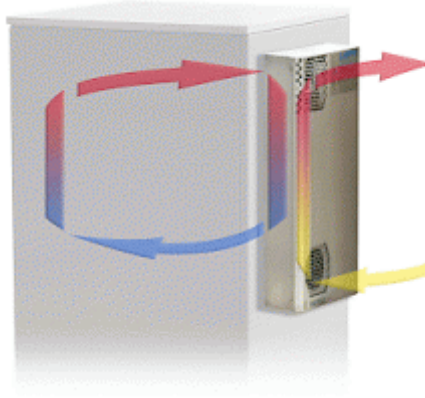

[click image to enlarge](#)

**Cut out Dimensions:**

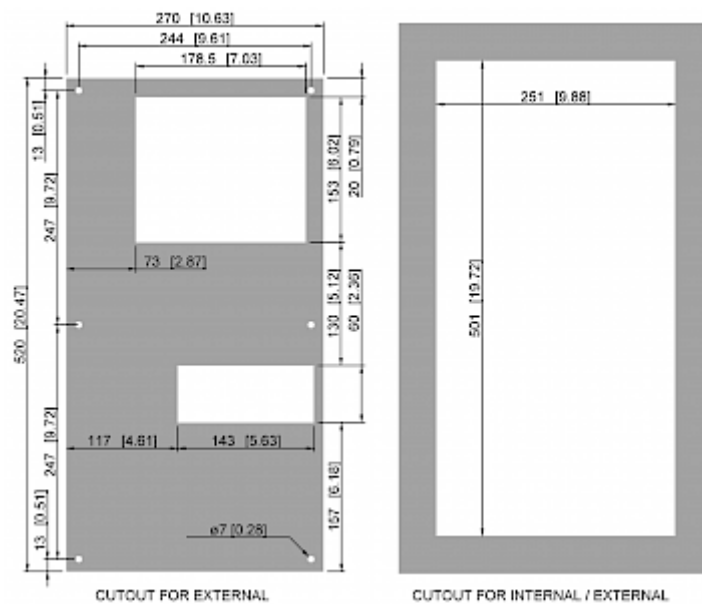

[click image to enlarge](#)