

Roof Fan



Description

| | |
|----------------------------|---------------------------|
| Order Number: | 6085A4000 |
| Brand Name: | SOLIFLEX |
| Colour: | RAL 7035 |
| Housing Material: | Mild steel, powder coated |
| Ingress Protection: | IP 54, Type 1, 12 |
| Approvals: | CE, cURus |

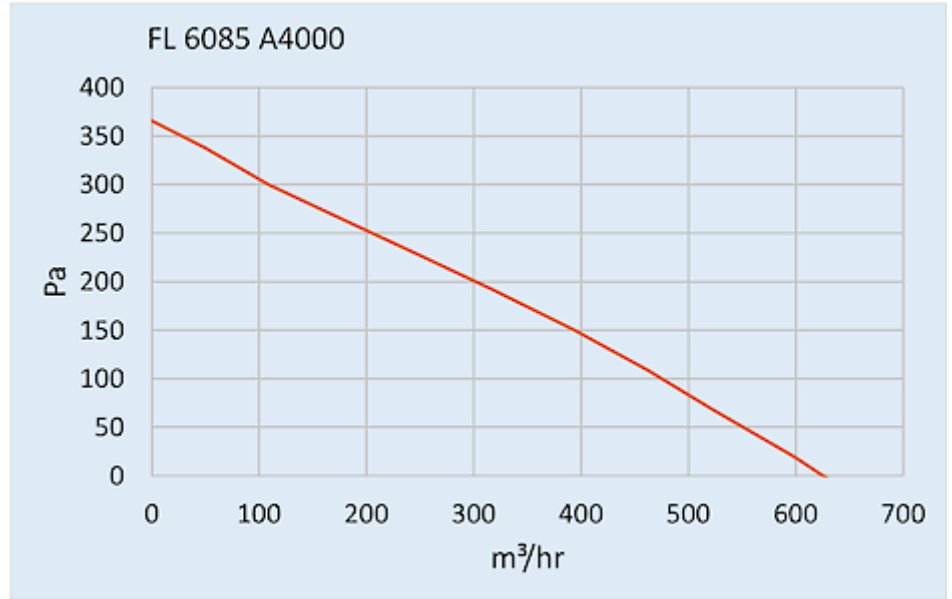
Technical Data

| | |
|-------------------------------------|-------------------------|
| Operating Temperature Range: | -10°C - 55°C |
| Air flow unimpeded: | 630 m ³ /h |
| Static pressure: | 360 Pa |
| Mounting: | top mounted |
| Dimensions A x B x C (D+E): | 147 x 457 x 457 mm |
| Weight: | 6.4 kg |
| Cut out dimensions: | 291 x 291 mm |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| Rated current: | 0.38 / 0.49 A |
| Power consumption: | 88 / 116 W |
| Degree of separation: | 85% - DIN 24185 |
| Filter class: | G3 (Aluminium optional) |
| Noise level: | 70 dB(A) |
| Connection: | 4 pole connector |

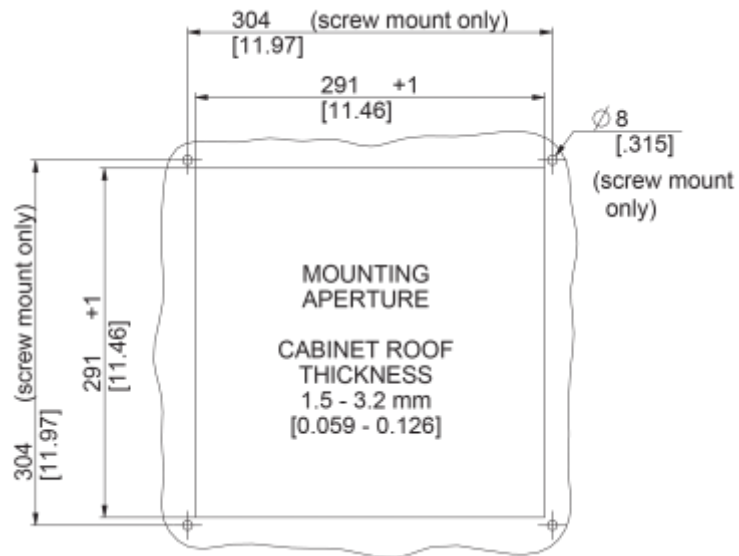
Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLIFLEX - Filter fans & exhaust filters](#)

Performance graph:


click image to enlarge

Cut Out Dimension:


click image to enlarge

Order Information

| | |
|-------------------|---------------|
| Taric code | 84145915 |
| GTIN (EAN) | 5350604100893 |