

## SOLITHERM PROTEC



### Description

<b>Order Number:</b>	87060584
<b>Brand Name:</b>	SOLITHERM PROTEC
<b>Housing Material:</b>	Stainless steel AISI 316 (V4A)
<b>IP protection class to EN 60 529:</b>	IP 56 / Type 12, 3, 3R, 4, 4X
<b>Approvals:</b>	CE, UL(ACVS), cULus

## Technical Data

<b>Cooling capacity L35L35 (EN14511-3):</b>	600 W @ 50 Hz 630 W @ 60 Hz
<b>Cooling capacity L35L50 (EN14511-3):</b>	430 W @ 50 Hz 450 W @ 60 Hz
<b>EER L35L35:</b>	1.5
<b>Enclosure heater:</b>	150 W
<b>Compressor type:</b>	rotary piston compressor
<b>Refrigerant / GWP:</b>	R 513A / 630
<b>Refrigerant charge:</b>	80 g / 2.8 oz
<b>High / low Pressure:</b>	28 / 6 bar 406 / 88 psi
<b>Air flow volume (system / unimpeded):</b>	Ambient: 235 / 408 m <sup>3</sup> /h Cabinet: 115 / 180 m <sup>3</sup> /h
<b>Operating Temperature Range:</b>	-40°C - 60°C
<b>UL temperature range:</b>	-40°C - 55°C
<b>Mounting:</b>	Wall mounted
<b>Dimensions A x B x C (D+E):</b>	380 x 250 x 250 mm
<b>Weight:</b>	15.7 kg
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>UL Voltage / Frequency:</b>	230 V ~ 60 Hz
<b>Current L35L35:</b>	2.1 A @ 50 Hz 2.0 A @ 60 Hz
<b>Starting current:</b>	5.3 A
<b>Max. current:</b>	2.3 A
<b>Nominal power L35L35:</b>	430 W @ 50 Hz 430 W @ 60 Hz
<b>Max. power:</b>	500 W
<b>Fuse:</b>	15 A (T)
<b>Max circuit ampacity:</b>	15 A
<b>Short-circuit current rating:</b>	5 kA
<b>Rated current compressor:</b>	1.6 A

**Full load current fans:** 0.2 A


---

**Connection:** 3 core cable for power  
5 core cable for signals  
3 pole terminal block for RS 485 MODBUS

---


Please click on the graphics to download.  
More CAD drawings can be found under [Product Download](#).  
> [Overview Product Group SOLITHERM PROTEC - for aggressive conditions](#)

**Performance graph:**

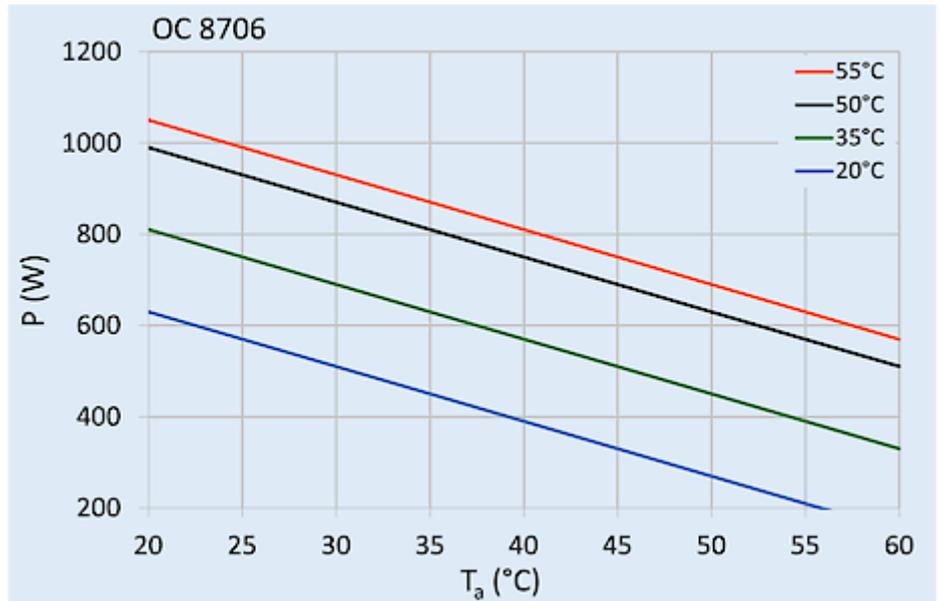

[click image to enlarge](#)

**Cut out Dimensions:**

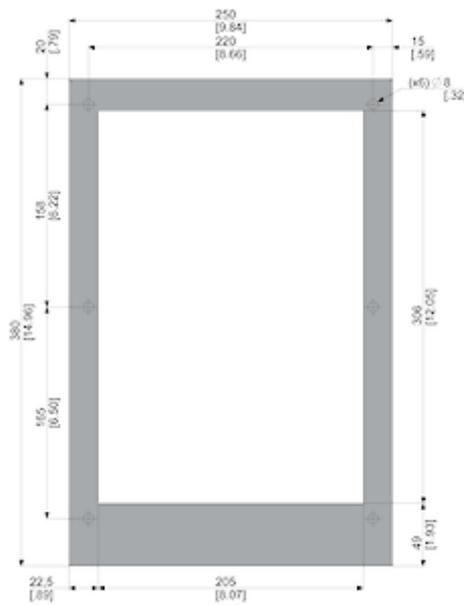

[click image to enlarge](#)

## Order Information

**Taric Code**

84158200

---