

## SOLITHERM PROTEC



### Description

<b>Order Number:</b>	87061584
<b>Brand Name:</b>	SOLITHERM PROTEC
<b>Housing Material:</b>	Stainless steel AISI 316 (V4A)
<b>Ingress Protection:</b>	IP 56 / Type 12, 3, 3R, 4, 4X
<b>Approvals:</b>	CE, UL(ACVS), cULus

## Technical Data

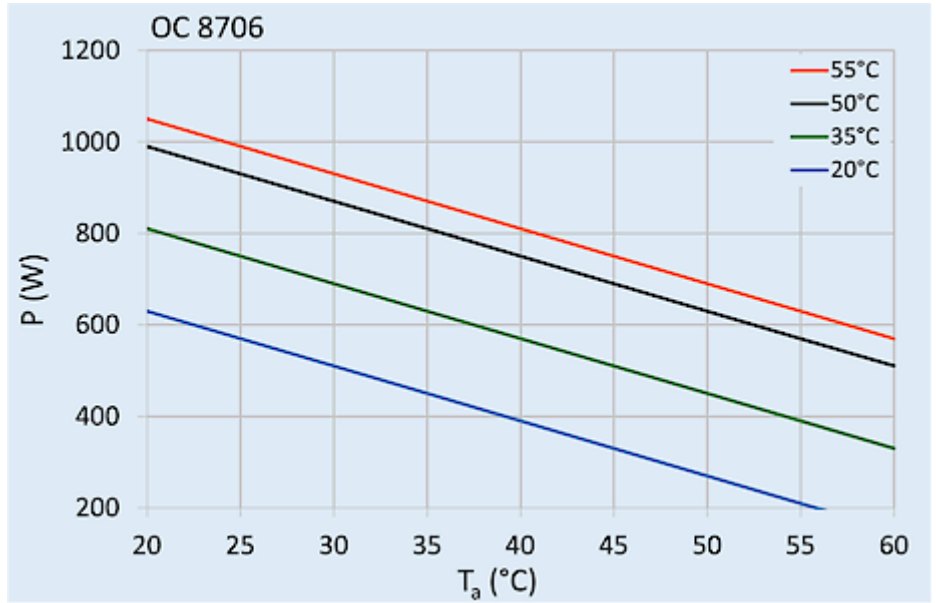
<b>Cooling capacity L35L35 (EN14511-3):</b>	630 W @ 50 Hz 665 W @ 60 Hz
<b>Cooling capacity L35L50 (EN14511-3):</b>	510 W @ 50 Hz 530 W @ 60 Hz
<b>Enclosure heater:</b>	150 W
<b>Compressor type:</b>	rotary piston compressor
<b>Refrigerant / GWP:</b>	R 134a / 1430
<b>Refrigerant charge:</b>	97 g / 3.4 oz
<b>High / low Pressure:</b>	28 / 6 bar 406 / 88 psi
<b>Operating Temperature Range:</b>	-40°C - 60°C
<b>UL temperature range:</b>	-40°C - 55°C
<b>Air flow volume (system / unimpeded):</b>	Ambient: 235 / 408 m <sup>3</sup> /h Cabinet: 115 / 180 m <sup>3</sup> /h
<b>Mounting:</b>	Wall mounted
<b>Dimensions A x B x C (D+E):</b>	380 x 250 x 250 mm
<b>Weight:</b>	15.7 kg
<b>Voltage / Frequency:</b>	120 V ~ 50/60 Hz
<b>UL Voltage / Frequency:</b>	120 V ~ 60 Hz
<b>Current L35L35:</b>	4.9 A @ 50 Hz 3.9 A @ 60 Hz
<b>Starting current:</b>	13 A
<b>Max. current:</b>	5.1 A
<b>Nominal power L35L35:</b>	420 W @ 50 Hz 435 W @ 60 Hz
<b>Max. power:</b>	570 W
<b>Fuse:</b>	15 A (T)
<b>Max circuit ampacity:</b>	15 A
<b>Short-circuit current rating:</b>	5 kA
<b>Rated current compressor:</b>	3.7 A

<b>Full load current fans:</b>	0.38 A
<b>Connection:</b>	3 core cable for power 5 core cable for signals 3 pole terminal block for RS 485 MODBUS

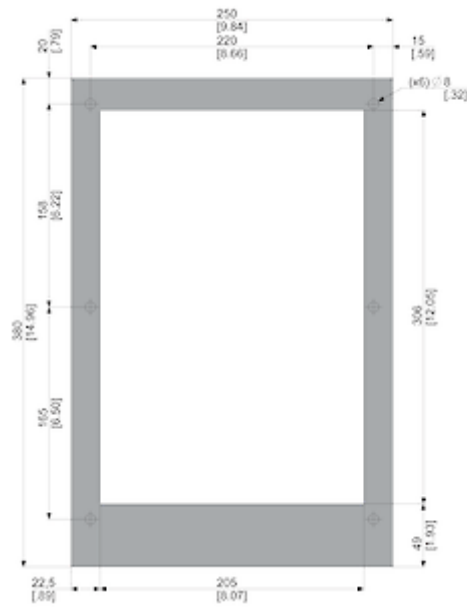
Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLITHERM PROTEC - for aggressive conditions](#)

**Performance graph:**


[click image to enlarge](#)

**Cut Out Dimension:**


[click image to enlarge](#)

## Order Information

**Taric Code**

84158200

---