

## SOLITHERM PROTEC



### Description

<b>Order Number:</b>	87121584
<b>Brand Name:</b>	SOLITHERM PROTEC
<b>Housing Material:</b>	Stainless steel AISI 316 (V4A)
<b>Ingress Protection:</b>	IP 56 / Type 12, 3, 3R, 4, 4X
<b>Approvals:</b>	CE, UL(ACVS), cULus
<b>UL File Number:</b>	SA32278

## Technical Data

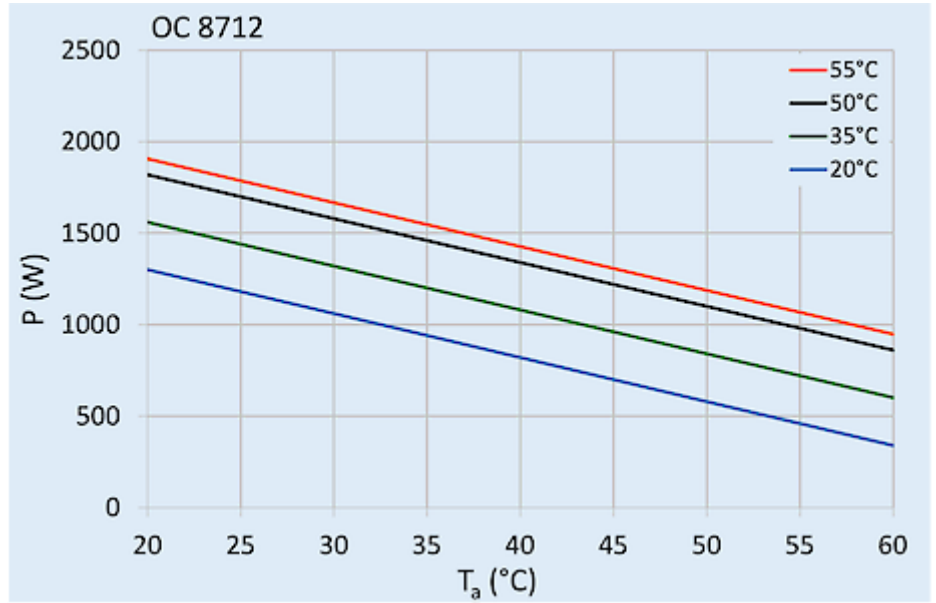
<b>Cooling capacity L35L35 (EN14511-3):</b>	1120 W @ 50 Hz 1200 W @ 60 Hz
<b>Cooling capacity L35L50 (EN14511-3):</b>	800 W @ 50 Hz 840 W @ 60 Hz
<b>EER L35L35:</b>	1.5
<b>Enclosure heater:</b>	400 W
<b>Compressor type:</b>	Reciprocating compressor
<b>Refrigerant / GWP:</b>	R 134a / 1430
<b>Refrigerant charge:</b>	210 g / 7.5 oz
<b>High / low Pressure:</b>	30 / 6 bar 435 / 88 psi
<b>Operating Temperature Range:</b>	-40 °C - 60 °C
<b>UL temperature range:</b>	-40 °C - 60 °C
<b>Air flow volume (system / unimpeded):</b>	Ambient air circuit: 280 / 550 m <sup>3</sup> /h Cabinet air circuit: 300 / 470 m <sup>3</sup> /h
<b>Mounting:</b>	Wall mounted
<b>Dimensions A x B x C (D+E):</b>	585 x 305 x 305 mm
<b>Weight:</b>	34.5 kg
<b>Cut out dimensions:</b>	345 x 235 mm
<b>Voltage / Frequency:</b>	120 V ~ 50/60 Hz
<b>UL Voltage / Frequency:</b>	120 V ~ 60 Hz
<b>Current L35L35:</b>	6.5 A @ 50 Hz 7.1 A @ 60 Hz
<b>Starting current:</b>	30 A
<b>Max. current:</b>	9.2 A
<b>Nominal power L35L35:</b>	700 W @ 50 Hz 800 W @ 60 Hz
<b>Max. power:</b>	1.05 kW
<b>Fuse:</b>	15 A (T)

<b>Max circuit ampacity:</b>	15 A
<b>Short-circuit current rating:</b>	5 kA
<b>Rated current compressor:</b>	5 A
<b>Full load current fans:</b>	1.5 A
<b>Connection:</b>	5 pole terminal block for signals 4 pole terminal block for power 3 pole terminal block for RS 485 MODBUS

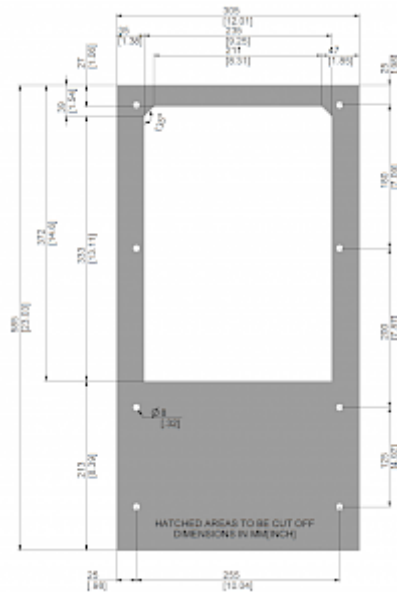
Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLITHERM PROTEC - for aggressive conditions](#)

**Performance graph:**


click image to enlarge

**Cut Out Dimension:**


click image to enlarge

## Order Information

**Taric code**

84158200

---