

SOLITHERM PROTEC



Description

Order Number:	87122584
Brand Name:	SOLITHERM PROTEC
Housing Material:	Stainless steel AISI 316 (V4A)
IP protection class to EN 60 529:	IP 56 / Type 12, 3, 3R, 4, 4X
Approvals:	CE, UL(ACVS), cULus
UL File Number:	SA32278

Technical Data

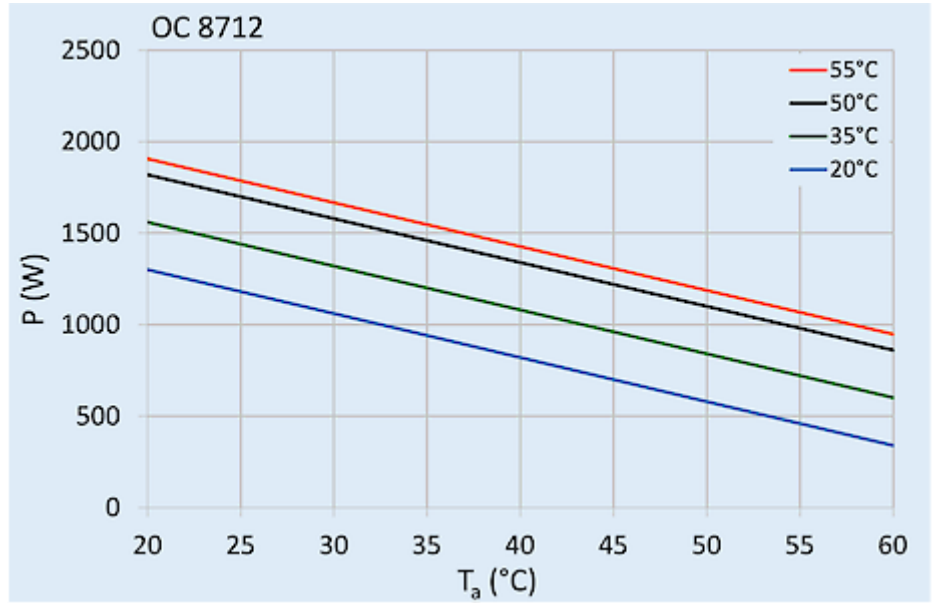
Cooling capacity L35L35 (EN14511-3):	1120 W @ 50 Hz 1200 W @ 60 Hz
Cooling capacity L35L50 (EN14511-3):	800 W @ 50 Hz 840 W @ 60 Hz
EER L35L35:	1.6 / 1.4
Enclosure heater:	400 W
Compressor type:	Reciprocating compressor
Refrigerant / GWP:	R 513A / 630
Refrigerant charge:	234 g / 8.3 oz
High / low Pressure:	30 / 6 bar 435 / 88 psi
Air flow volume (system / unimpeded):	Ambient air circuit: 280 / 550 m ³ /h Cabinet air circuit: 300 / 470 m ³ /h
Operating Temperature Range:	-40 °C - 60 °C
UL temperature range:	-40 °C - 60 °C
Mounting:	Wall mounted
Dimensions A x B x C (D+E):	585 x 305 x 305 mm
Weight:	35 kg
Cut out dimensions:	345 x 235 mm
Voltage / Frequency:	400/460 V - 50/60 Hz 2~
UL Voltage / Frequency:	460 V / 60 Hz 2~
Current L35L35:	2.0 A @ 50 Hz 2.2 A @ 60 Hz
Starting current:	8.6 A
Max. current:	3.0 A
Nominal power L35L35:	720 W @ 50 Hz 840 W @ 60 Hz
Max. power:	1100 W
Fuse:	15 A (T)

Max circuit ampacity:	15 A
Short-circuit current rating:	5 kA
Rated current compressor:	1.3 A
Full load current fans:	0.4 A
Connection:	5 pole terminal block for signals 4 pole terminal block for power 3 pole terminal block for RS 485 MODBUS

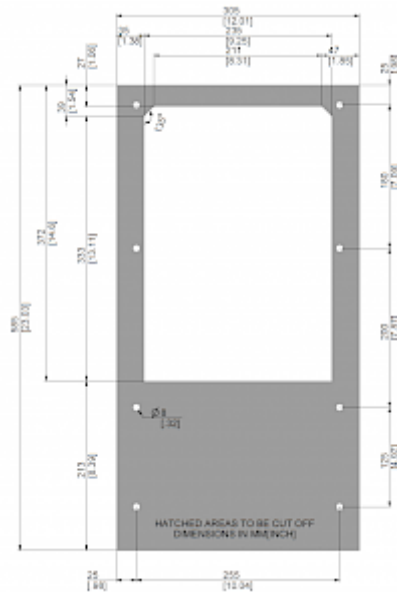
Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLITHERM PROTEC - for aggressive conditions](#)

Performance graph:


click image to enlarge

Cut Out Dimension:


click image to enlarge

Order Information

Taric code

84158200
