

Air / water heat exchanger



Description

Order Number:	755521B001
Brand Name:	SLIMLINE HEX
Colour:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress Protection:	IP 55 / Type 12, 3, 3R, 4, 4X
Included:	Digital controller / solenoid valve
Approvals:	CE, cURus, cULus

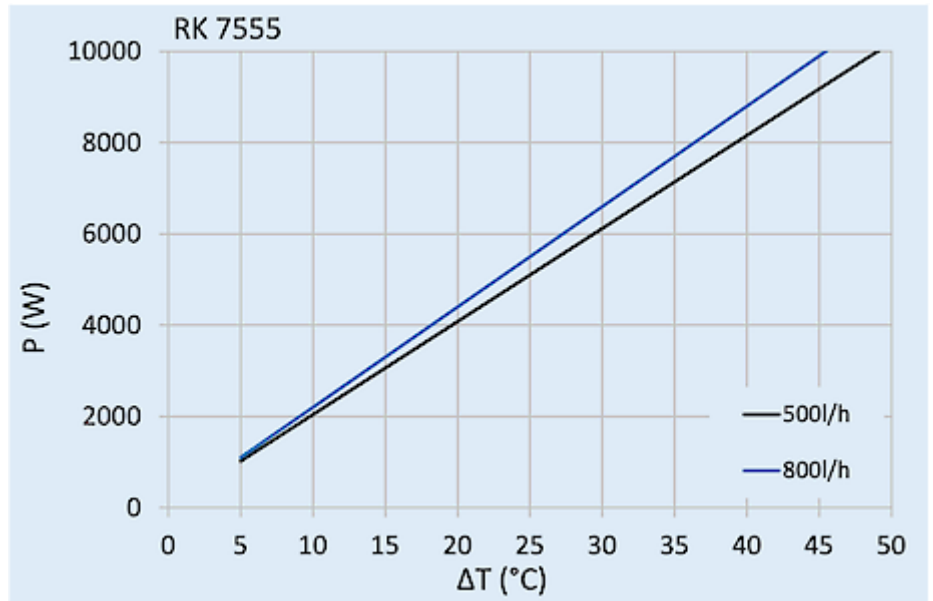
Technical Data

Cooling capacity L35W10 (200 l/h):	5500 W (800l/h)
Coolant:	Water, light oils or similar
Operating Temperature Range:	1°C - 60°C
Air flow volume (system / unimpeded):	780 / 1,100 m ³ /h
Mounting:	Wall mounted / recessed
Dimensions A x B x C (D+E):	1,550 x 455 x 232 (37+195) mm
Weight:	39 kg
Voltage / Frequency:	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
Starting current:	0.9 / 1.0 A
Max. current:	0.4 / 0.5 A
Max. power:	170 / 250 W
Pressure water circuit:	10 bar
Water connection:	Rp 1/2" - inside thread (with optional connectors for pipe internal diameter of 13 mm)
Noise level:	5.5 kW L35W10 (800l/h)
Fuse:	2 A (T)
Connection:	5 - pole terminal for signals 4 - pole terminal for power

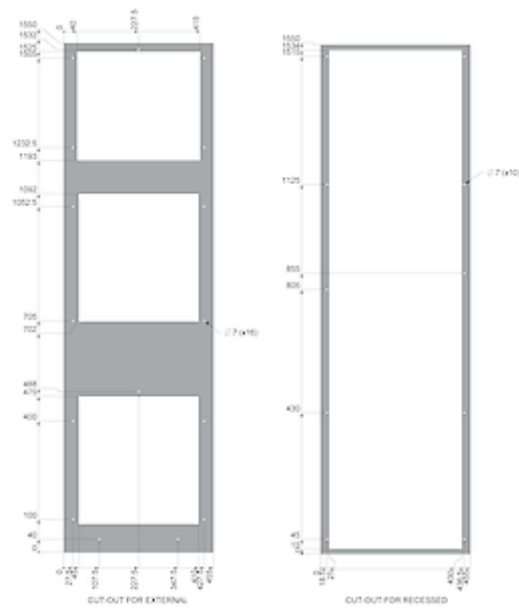
Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SLIMLINE HEX - air/water heat exchangers](#)

Performance graph:


[click image to enlarge](#)

Cut Out Dimension:


[click image to enlarge](#)

Order Information

Stainless steel AISI 304 (V2A) housing order no	755521B62
Box dimension	1642 x 555 x 299 mm
Gross weight	47 kg
Taric code	84158300