





Filter Fan



Description

Order Number:	4210A3000
Brand Name:	SOLIFLEX
Colour:	RAL 7035
Housing Material:	ABS Plastic
IP protection class to EN 60 529:	IP 54, Type 12, 3R
Optional:	Different housing colors available on request
Approvals:	CE, cURus, cULus, CSA
Accessories:	<div style="display: flex; flex-direction: column; align-items: flex-start;"> <div style="display: flex; align-items: center; margin-bottom: 10px;">  <div style="margin-left: 10px;">Hose-proof protection hood FC 4000 100</div> </div> <div style="display: flex; align-items: center; margin-bottom: 10px;">  <div style="margin-left: 10px;">Hose-proof protection hood FC 4000 100 FDA</div> </div> <div style="display: flex; align-items: center; margin-bottom: 10px;">  <div style="margin-left: 10px;">Adjustable Thermostat NO</div> </div> <div style="display: flex; align-items: center;">  <div style="margin-left: 10px;">Filter media</div> </div> </div>

Technical Data

Air flow unimpeded IP 54:	67 m ³ /h - 79 m ³ /h
Operating Temperature Range:	-10°C - 55°C
Static pressure:	86 Pa @ 60 Hz
Dimensions A x B x C (D+E):	150 x 150 x 73 mm
Weight:	0.8 kg
Cut out dimensions:	124 x 124 (+1.5) mm
Voltage / Frequency:	120 V ~ 60 Hz
Rated current:	0.22 A
Power consumption:	17 W
Degree of separation IP 54:	85% - DIN 24185
Wall thickness:	1 - 2.1 mm
Filter class (ISO 16890):	G3 according to EN 779
Installation:	Elastic clips
Noise level:	40 dB(A) @ 50 Hz 44 dB(A) @ 60 Hz


Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLIVENT PRO - Filter fans & exhaust filters](#)



Air flow:

Q = Air flow [m³/h]
 P = Static pressure [Pa]

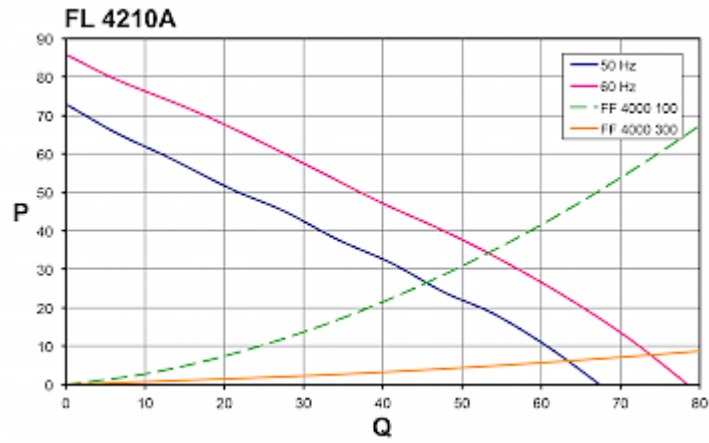

click image to enlarge

Cut out Dimensions:

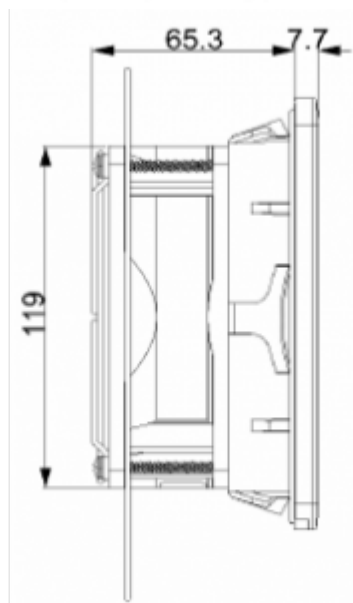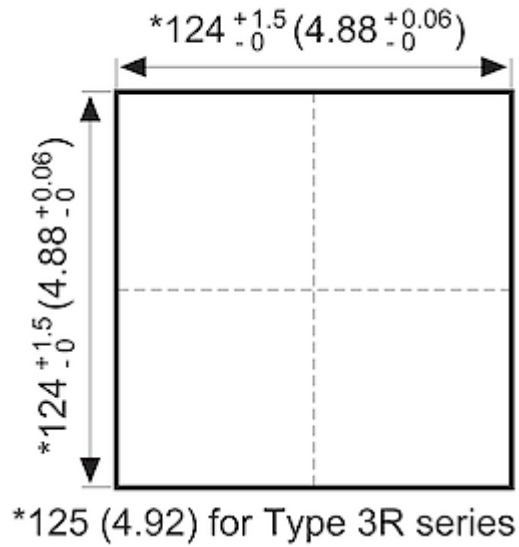

click image to enlarge

Order Information

In RAL 9005	4210A3003
With TYPE 3R protection part no.	4210A3033
Taric code	84145915
GTIN (EAN)	5350604100237