

Air / Water Heat Exchanger



Description

Order Number:	2116210
Brand Name:	SLIMLINE HEX
Colour:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress Protection:	IP 54
Approvals:	CE, cURus

Technical Data

Cooling capacity L35W10 (200 l/h):	2100 W
Cooling capacity L35W10 (500 l/h):	2.2 kW
Coolant:	Water, light oils or similar
Operating Temperature Range:	1°C - 72°C
Air flow volume (system / unimpeded):	270 / 710 m ³ /h @ 50 Hz 300 / 780 m ³ /h @ 50 Hz
Mounting:	Wall mounted / internal
Dimensions A x B x C (D+E):	891 x 212 x 105 mm
Weight:	11.5 kg
Voltage / Frequency:	400 V ~ 50/60 Hz
Starting current:	0.8 A
Max. current:	0.4 A
Max. power:	125 W
Pressure water circuit:	10 bar
Water connection:	Rp 1/4" - inside thread with 2 connectors for pipe internal diameter of 10mm
Fuse:	3 x 1 A (T)
Connection:	3 m cable ready for connection


Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SLIMLINE HEX - air/water heat exchangers](#)

Performance graph:

ΔT = Temperature difference between air intake and cooling
 P = Cooling capacity

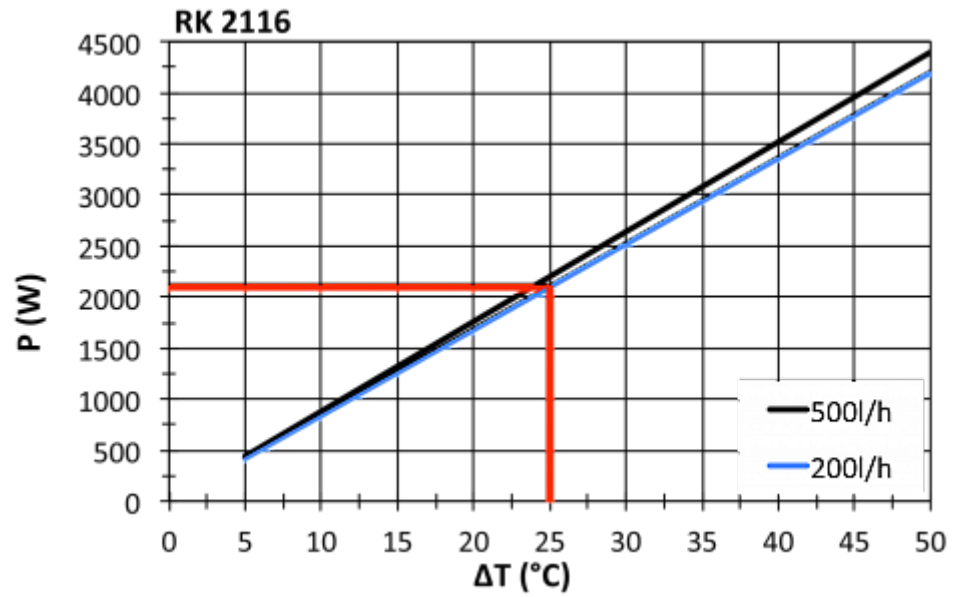


[click image to enlarge](#)

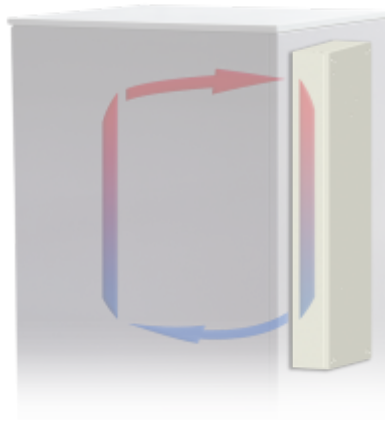Air flow:


[click image to enlarge](#)

Cut Out Dimension:

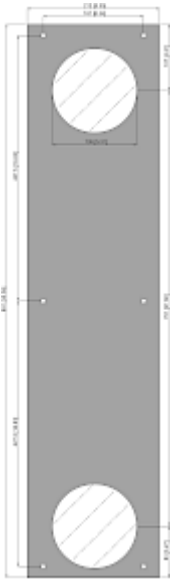

[click image to enlarge](#)

Order Information

Stainless steel housing part no.	2116212
With proportional water flow regulator (control range 20°C - 50°C)	2116200
Box dimension	1033.6 x 244 x 127 mm
Gross weight	14 kg
Taric code	84199085
GTIN (EAN)	5350604210691