

Roof Fan



Description

Order Number:	6996A4000
Brand Name:	SOLIFLEX
Colour:	RAL 7035
Housing Material:	Mild steel, powder coated
IP protection class to EN 60 529:	IP 21
Included:	Low noise (1500 m ³ /hr) connector High speed (4000 m ³ /hr) connector Connector for Modbus Thermostat 301120
Approvals:	CE

Technical Data

Air flow volume (system / unimpeded):	Low noise: 1,500 m ³ /h High Speed: 4,000 m ³ /hr
Air flow unimpeded IP 54:	1500 / 4000 m ³ /h
Operating Temperature Range:	-20°C - 55°C
Mounting:	top mounted
Dimensions A x B x C (D+E):	310 x 560 x 560 mm
Weight:	16 kg
Cut out dimensions:	410 x 410 mm
Voltage / Frequency:	230 V ~ 50/60 Hz
Rated current:	Low Noise: 0.17 A High Speed: 1.09 A
Power consumption:	Low Noise: 40 W High Speed: 250 W
Filter class (ISO 16890):	Optional Aluminium filter
Noise level:	Low Noise: 55 dB(A) High Speed: 70 dB(A)
Connection:	Power - 4 pole connector Fan Status - 2 pole connector Speed Control / Modbus - 5 pole connector


Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLIVENT PRO - Filter fans & exhaust filters](#)


Air flow:

Q = Air flow [m³/h]
 P = Static pressure [Pa]

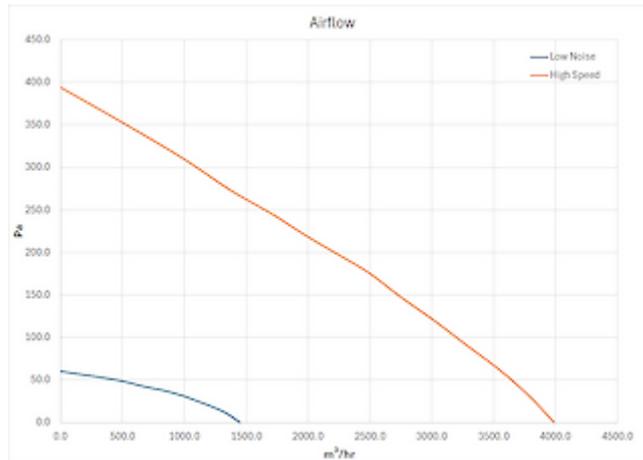

[click image to enlarge](#)

Cut out Dimensions:

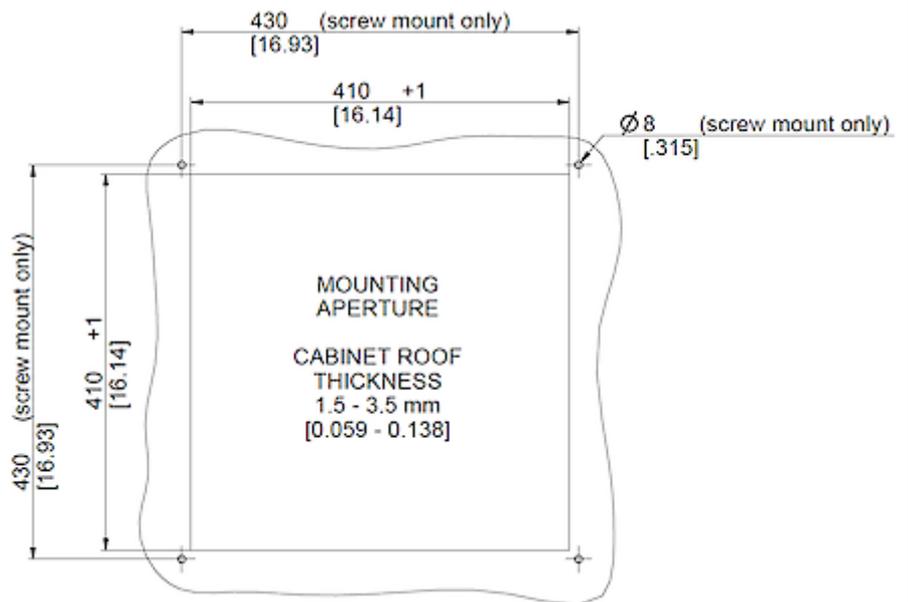

[click image to enlarge](#)

Order Information

Taric code

84145915
