




Thermoelectric cooling unit



Description

Order Number:	3050303
Brand Name:	SOLITHERM PELTIER
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress Protection:	IP 66 / UL Type 12, 4, 4X
Note:	The torque for the mounting nuts should be 4.5 Nm.
Approvals:	CE, cURus
Accessories:	<div style="display: flex; align-items: center;">  <p>Bimetallic temperature controller</p> </div> <div style="display: flex; align-items: center; margin-top: 10px;">  <p>Thermostat 301510</p> </div> <div style="display: flex; align-items: center; margin-top: 10px;">  <p>Condensate Kit 3030 / 3050</p> </div>

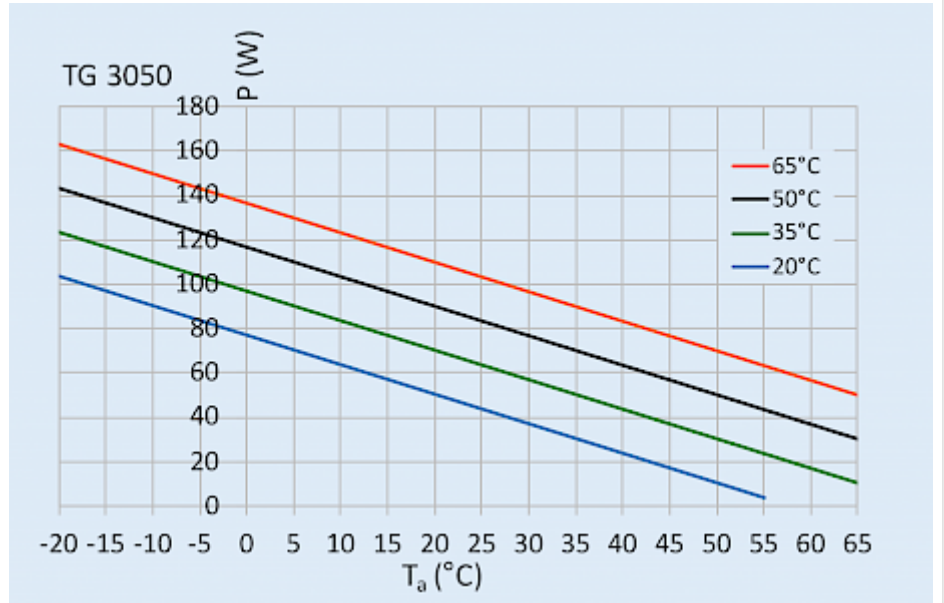
Technical Data

Cooling capacity L35L35 (EN14511-3):	50 W
Operating Temperature Range:	-20°C - 70°C
UL temperature range:	-20°C - 65°C
Air flow volume (system / unimpeded):	Ambient air circuit: 64 / 170 m ³ /h Cabinet air circuit: 23 / 72 m ³ /h
Mounting:	Recessed
Dimensions A x B x C (D+E):	200 x 154 x 138 (65+73) mm
Weight:	3.3 kg
Cut out dimensions:	170 x 120 mm
Voltage / Frequency:	24 V DC
Current L35L35:	2.4 A
Starting current:	3.7 A
Max. current:	2.8 A
Nominal power L35L35:	58 W
Max. power:	66 W
Fuse:	4 A (T)
Connection:	Connection terminal block

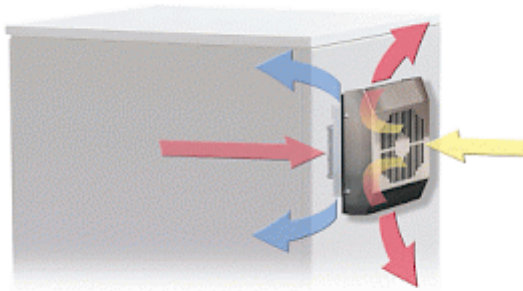
Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

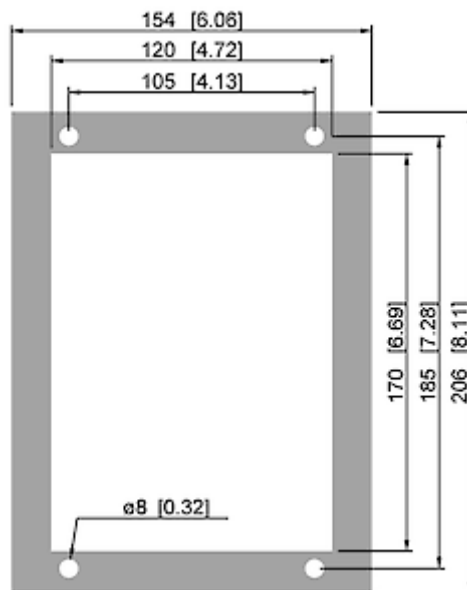
> [Overview Product Group SOLITHERM PELTIER - cooling without refrigerant](#)

Performance graph:


click image to enlarge

Air flow:


click image to enlarge

Cut Out Dimension:


click image to enlarge

Order Information

Stainless steel AISI 316 (V4A) housing part no.	30503034
Box dimension	244 x 142 x 159 mm
Gross weight	4 kg
Taric code	84158300