

Sensor operated LED lamp. Only for installation inside industrial control cabinets.



Description

Order Number: 490540612

Colour: RAL 9003

Housing Material: Mild steel, powder coated

IP protection class to EN 60 529: IP 20

Included: Motion sensor

SK notes: Suitable for damp locations

Approvals: CE, cURus

UL File Number: E358386

Accessories:



Power cable AC black, 0.7 m



Power cable AC orange, 0.7 m



Power cable AC black, 3 m



Power cable AC orange, 3 m

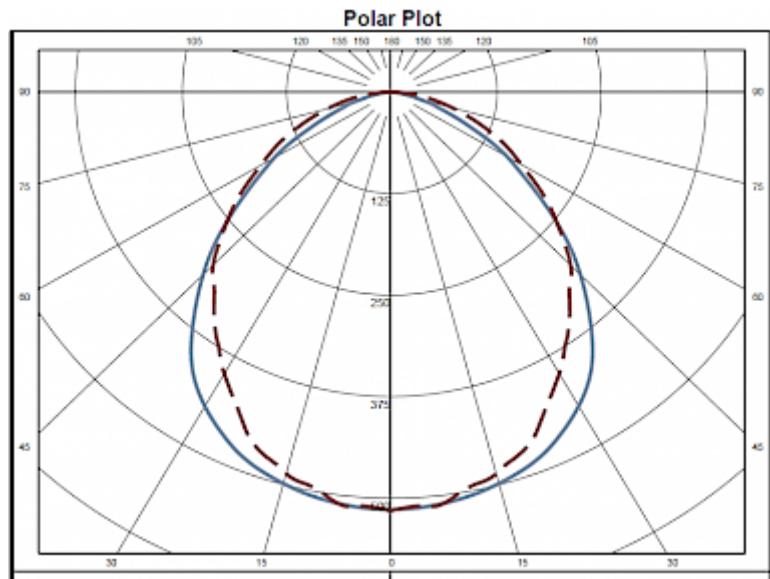
Technical Data

| | |
|-------------------------------------|---|
| Operating Temperature Range: | -30°C - 50°C |
| Mounting: | M5 screws (x2) |
| Dimensions A x B x C (D+E): | 420 x 90 x 45 mm |
| Weight: | 2 kg |
| Voltage / Frequency: | 115 - 230 V ~ 50/60 Hz |
| Rated current: | 0.2 A |
| Power consumption: | 16 W |
| Lamp: | EB-7801 |
| Luminosity: | 1500 lm / 5100 K |
| Lifetime: | 60,000 hrs. @ 20°C |
| Connection: | Recommended external backup fuse: 0.5 A (T) |

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group Energy-saving LED enclosure Lamps](#)

Performance graph:

click image to enlarge

Order Information

Taric code

94054990