

Cabinet cooling unit for 19" rack



Description


| | |
|----------------------------|---------------------------|
| Order Number: | 45340001 |
| Brand Name: | 19" RACK |
| Colour: | RAL 7035 |
| Housing Material: | Mild steel, powder coated |
| Ingress Protection: | IP 54 |
| Approvals: | CE |

Technical Data

| | |
|--|--|
| Cooling capacity L35L35 (EN14511-3): | 850 W @ 50 Hz 930 W @ 60 Hz |
| Cooling capacity L35L50 (EN14511-3): | 590 W @ 50 Hz 635 W @ 60 Hz |
| Compressor type: | Reciprocating compressor |
| Refrigerant / GWP: | R134a / 1430 |
| Refrigerant charge: | 400 g / 14.1 oz |
| High / low Pressure: | 35 / 6 bar 508 / 88 psig |
| Operating Temperature Range: | 20°C - 55°C |
| Air flow volume (system / unimpeded): | Ambient air circuit: 250 / 850 m ³ /h Cabinet air circuit: 280 / 550 m ³ /h |
| Mounting: | 19" rack |
| Dimensions A x B x C (D+E): | 266 (6U) x 483 x 549 mm |
| Weight: | 33 kg |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| Current L35L35: | 4.5 A @ 50 Hz 4.3 A @ 60 Hz |
| Starting current: | 19.7 A |
| Max. current: | 5.8 A |
| Nominal power L35L35: | 795 W @ 50 Hz 900 W @ 60 Hz |
| Max. power: | 1,22 kW |
| Fuse: | 6 A (T) |
| Short-circuit current rating: | 5 kA |
| Connection: | Connection terminal block |


Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview Product Group SOLITHERM 19" RACK - cooling solutions](#)

Performance graph:

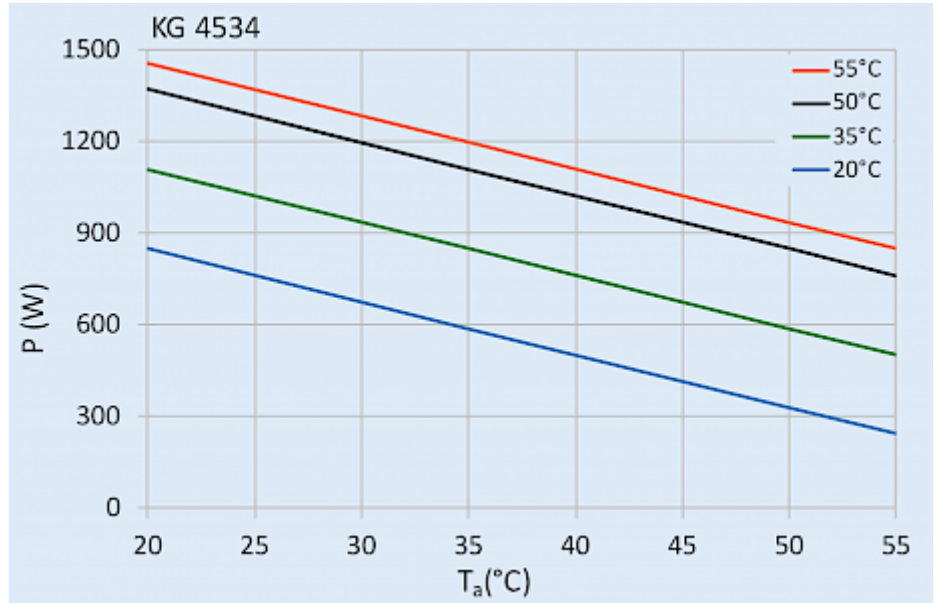

[click image to enlarge](#)

Air flow:

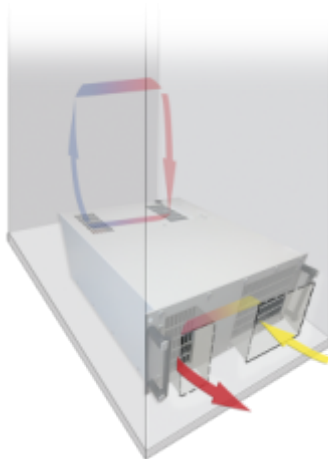

[click image to enlarge](#)

Order Information

| | |
|-------------------|---------------|
| Taric code | 84158200 |
| GTIN (EAN) | 5350604361300 |