

Mechanical hygrostat



Description

Order Number:	301410
Brand Name:	SOLIFLEX
Colour:	Grey (RAL 7011)
Housing Material:	PC plastic
IP protection class to EN 60 529:	IP 20
Note:	Hyst. 5%r.H. / Sw.Pt.tol $\pm 4\%$
Approvals:	CE, cURus
UL File Number:	E358385

Technical Data

Operating Temperature Range: 0°C - 60°C / 95 %

Setting range: 40% - 90%r.H.

Mounting: DIN Rail 35 mm

Dimensions A x B x C (D+E): 60 x 39 x 42.4 mm

Voltage / Frequency: max. 230 V AC
2 A (hum) / 5 A (dehum)

Lifetime: 30k Cycles



Connection: 3-pole terminal, clamping torque 0.5 Nm max.
solid wire - 2.5 mm² max., stranded wire - 1.5 mm² max.

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLIFLEX - thermostats and hygrostats for enclosures](#)

**Cut out
Dimensions:**

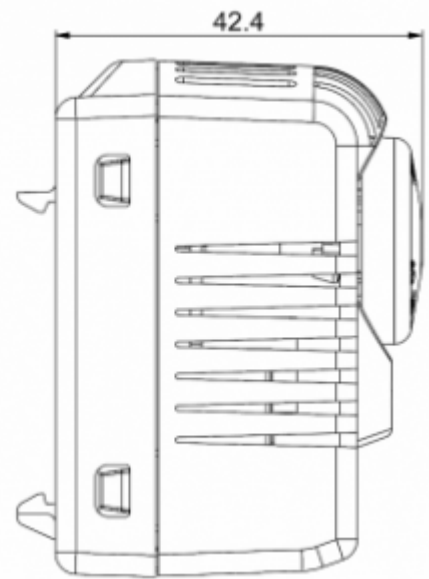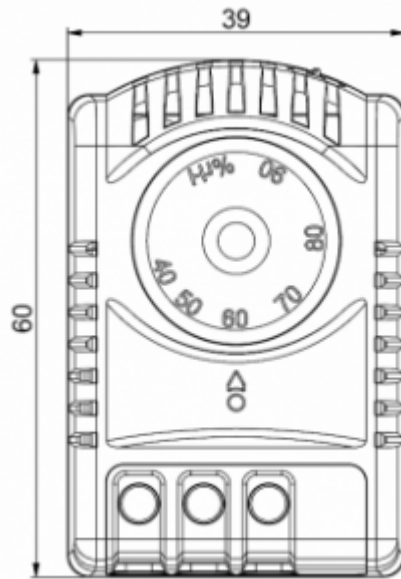

[click image to enlarge](#)

Order Information

Taric code	90321080
GTIN (EAN)	5350604010444