

## Mechanical hygrostat



## Description

<b>Order Number:</b>	301410
<b>Brand Name:</b>	SOLIFLEX
<b>Colour:</b>	Grey (RAL 7011)
<b>Housing Material:</b>	PC plastic
<b>IP protection class to EN 60 529:</b>	IP 20
<b>Note:</b>	Hyst. 5%r.H. / Sw.Pt.tol $\pm 4\%$
<b>Approvals:</b>	CE, cURus
<b>UL File Number:</b>	E358385

## Technical Data

**Operating Temperature Range:** 0°C - 60°C / 95 %

**Setting range:** 40% - 90%r.H.

**Mounting:** DIN Rail 35 mm

**Dimensions A x B x C (D+E):** 60 x 39 x 42.4 mm

**Voltage / Frequency:** max. 230 V AC  
2 A (hum) / 5 A (dehum)

**Lifetime:** 30k Cycles



**Connection:** 3-pole terminal, clamping torque 0.5 Nm max.  
solid wire - 2.5 mm<sup>2</sup> max., stranded wire - 1.5 mm<sup>2</sup> max.

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLIFLEX - accessories for safety inside enclosures](#)

**Cut Out  
Dimension:**

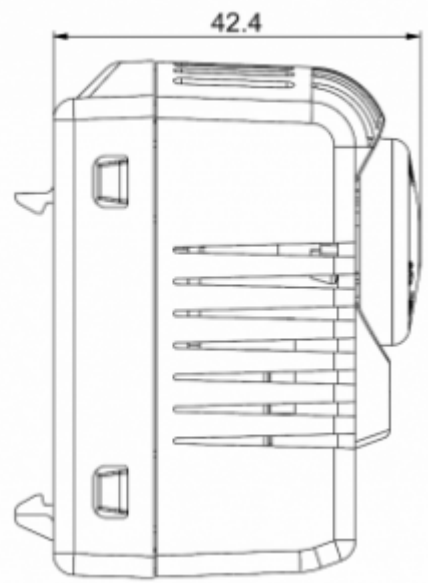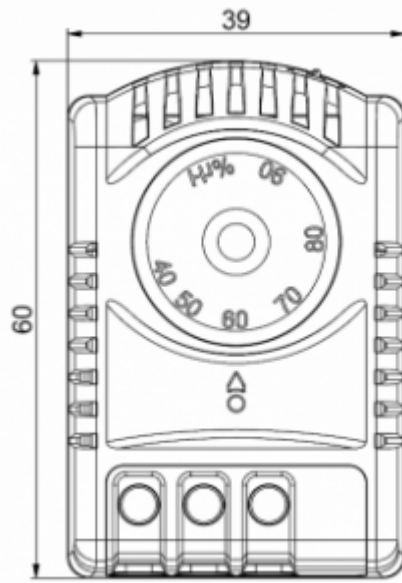

[click image to enlarge](#)

## Order Information

<b>Taric code</b>	90321089
<b>GTIN (EAN)</b>	5350604010444