


## Thermoelectric cooling unit



## Description

<b>Order Number:</b>	6405313
<b>Brand Name:</b>	SOLITHERM PELTIER
<b>Housing Material:</b>	Stainless steel AISI 304 (V2A)
<b>Ingress Protection:</b>	IP 66 / UL Type 12, 4, 4X
<b>Approvals:</b>	CE, cURus
<b>Accessories:</b>	 <a href="#">Condensate Kit 6405</a>

## Technical Data


<b>Cooling capacity L35L35 (EN14511-3):</b>	400 W
<b>Operating Temperature Range:</b>	-20°C - 70°C
<b>UL temperature range:</b>	-20°C - 65°C
<b>Air flow volume (system / unimpeded):</b>	Ambient air circuit: 240 / 325 m <sup>3</sup> /h Cabinet air circuit: 240 / 325 m <sup>3</sup> /h
<b>Mounting:</b>	Recessed
<b>Dimensions A x B x C (D+E):</b>	600 x 433 x 199 (133+66)
<b>Weight:</b>	34 kg
<b>Cut out dimensions:</b>	382 x 550 mm
<b>Voltage / Frequency:</b>	120 V ~ 60 Hz
<b>Current L35L35:</b>	4.1 A
<b>Starting current:</b>	6.5 A
<b>Max. current:</b>	4.5 A
<b>Nominal power L35L35:</b>	490 W
<b>Max. power:</b>	537 W
<b>Fuse:</b>	7 A (T)
<b>Connection:</b>	4 pole power connector 5 pole connector for signals

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SOLITHERM PELTIER - cooling without refrigerant](#)

**Performance graph:**

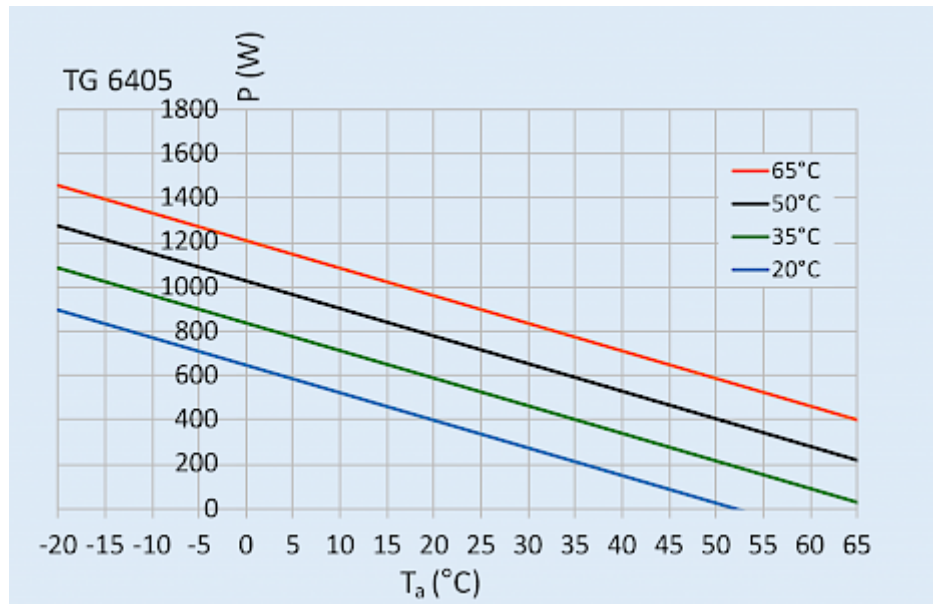

click image to enlarge

**Cut Out Dimension:**

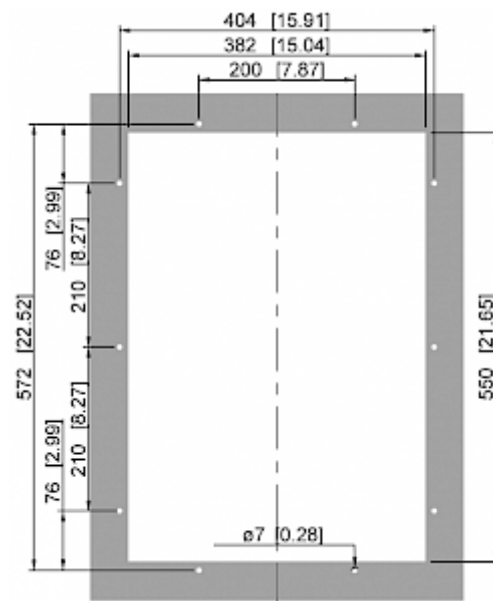

click image to enlarge

## Order Information

<b>Mit Edelstahlgehäuse AISI 316 (V4A) Bestell Nr.</b>	64053134
<b>Verpackungsmaße</b>	686.6 x 454 x 232 mm
<b>Bruttogewicht</b>	38 kg
<b>Zolltarifnummer</b>	84158300