

## Thermal f.b. thermostat



## Description

<b>Order Number:</b>	301321
<b>Brand Name:</b>	SOLIFLEX
<b>Colour:</b>	Grey (RAL 7011)
<b>Housing Material:</b>	PC plastic
<b>IP protection class to EN 60 529:</b>	IP 20
<b>Note:</b>	Hyst. 4-7K/1K / Sw.Pt.tol $\pm$ 3K
<b>Approvals:</b>	CE, cURus
<b>UL File Number:</b>	E358385

## Technical Data



<b>Operating Temperature Range:</b>	32°F - 140°F
<b>Setting range:</b>	32°F - 140°F
<b>Mounting:</b>	DIN Rail 35 mm
<b>Dimensions A x B x C (D+E):</b>	60 x 39 x 53.3 mm
<b>Weight:</b>	64 g
<b>Voltage / Frequency:</b>	AC:250V/10A(res)/2A(ind) DC:72V/30W UL: max.250 VAC NC/NO: 10/5 A (res)
<b>Lifetime:</b>	100,000 hrs.
<b>Connection:</b>	4-pole terminal, clamping torque 0.5 Nm max. solid wire - 2.5 mm <sup>2</sup> max., stranded wire - 1.5 mm <sup>2</sup> max.

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLIFLEX - thermostats and hygrostats for enclosures](#)

**Cut out  
Dimensions:**

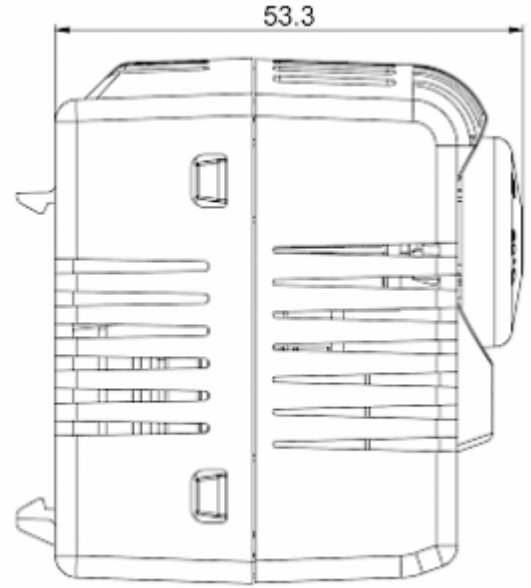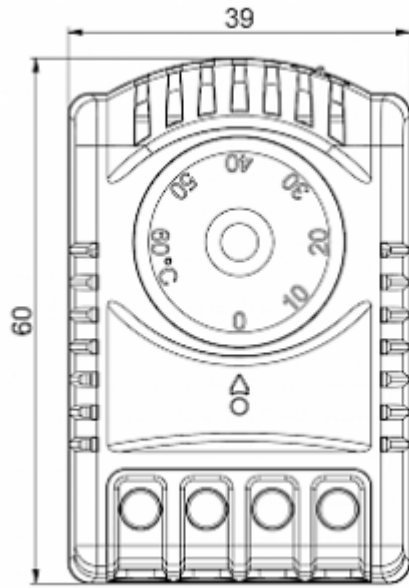

[click image to enlarge](#)

## Order Information

<b>Taric code</b>	90321089
<b>GTIN (EAN)</b>	5350604010413