

## Thermal f.b. thermostat



### Description

|  |                                    |
|--|------------------------------------|
| <b>Order Number:</b>                     | 301321                             |
| <b>Brand Name:</b>                       | SOLIFLEX                           |
| <b>Colour:</b>                           | Grey (RAL 7011)                    |
| <b>Housing Material:</b>                 | PC plastic                         |
| <b>IP protection class to EN 60 529:</b> | IP 20                              |
| <b>Note:</b>                             | Hyst. 4-7K/1K / Sw.Pt.tol $\pm$ 3K |
| <b>Approvals:</b>                        | CE, cURus                          |
| <b>UL File Number:</b>                   | E358385                            |

## Technical Data



|                                     |   |
|-------------------------------------|---|
| <b>Operating Temperature Range:</b> | 32°F - 140°F  |
| <b>Setting range:</b>               | 32°F - 140°F  |
| <b>Mounting:</b>                    | DIN Rail 35 mm  |
| <b>Dimensions A x B x C (D+E):</b>  | 60 x 39 x 53.3 mm   |
| <b>Weight:</b>                      | 64 g  |
| <b>Voltage / Frequency:</b>         | AC:250V/10A(res)/2A(ind) DC:72V/30W<br>UL: max.250 VAC NC/NO: 10/5 A (res)  |
| <b>Lifetime:</b>                    | 100,000 hrs.  |
| <b>Connection:</b>                  | 4-pole terminal, clamping torque 0.5 Nm max.<br>solid wire - 2.5 mm <sup>2</sup> max., stranded wire - 1.5 mm <sup>2</sup> max. |

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLIFLEX - thermostats and hygrostats for enclosures](#)

**Cut out  
Dimensions:**

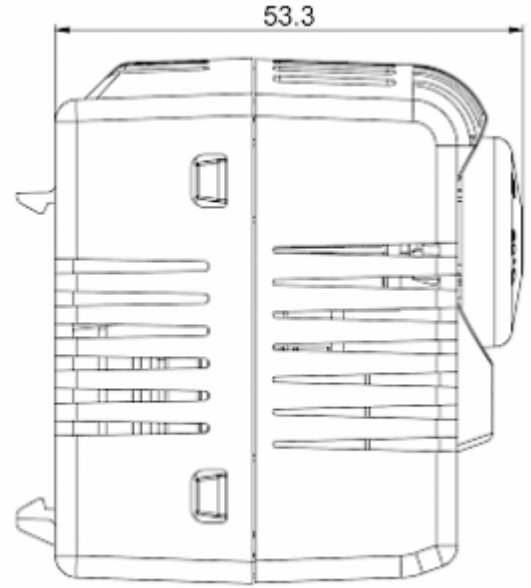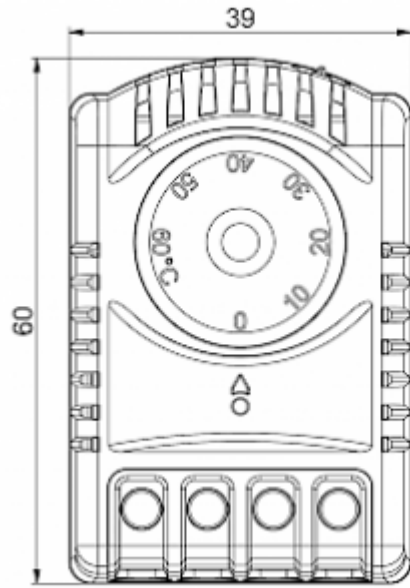

[click image to enlarge](#)

## Order Information

|                   |               |
|-------------------|---------------|
| <b>Taric code</b> | 90321089      |
| <b>GTIN (EAN)</b> | 5350604010413 |