

Roof mounted cooling unit



Description

Order Number:	951520001
Brand Name:	SLIMLINE PRO TOP
Colour:	RAL 7035
Housing Material:	Mild steel, powder coated
IP protection class to EN 60 529:	IP 54
Approvals:	CE, cURus

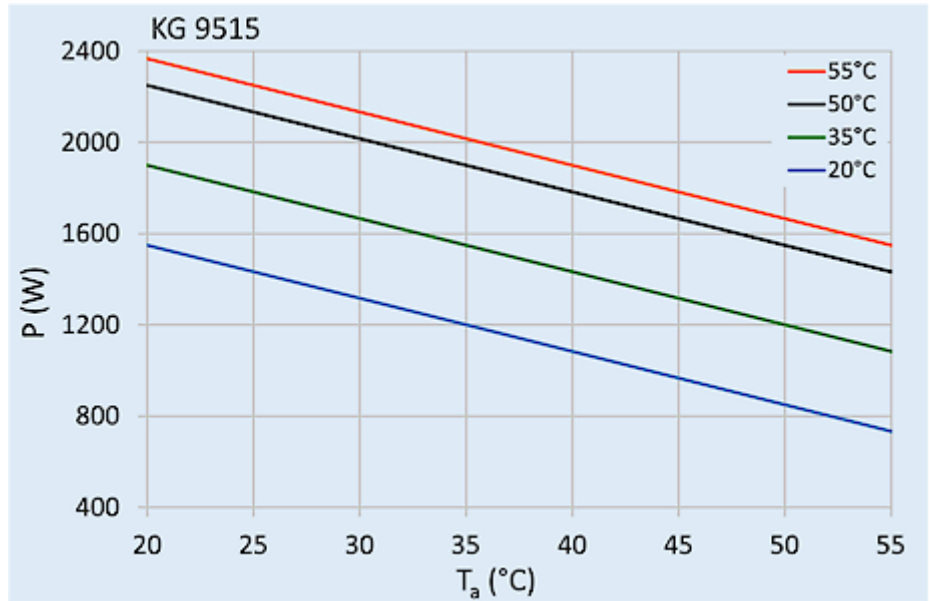
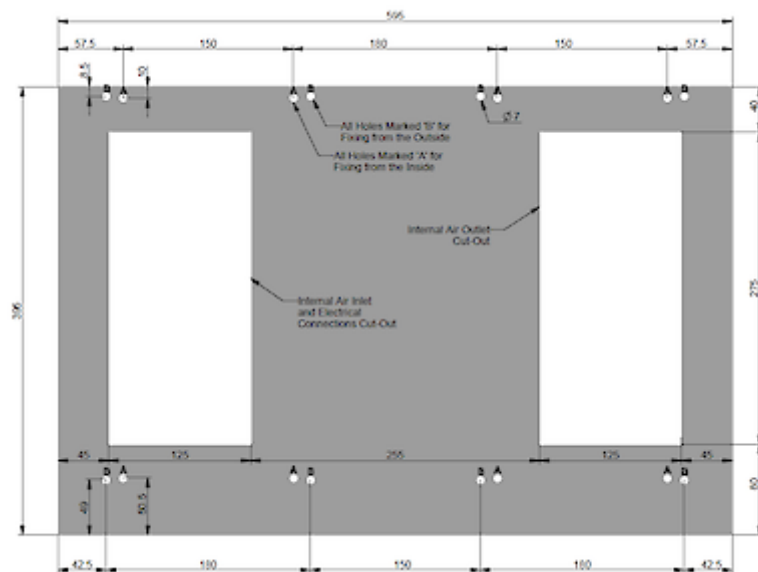
Technical Data

Cooling capacity L35L35 (EN14511-3):	1550 W
Cooling capacity L35L50 (EN14511-3):	1200 W
Compressor type:	Rotary piston
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	267 g / 9.4 oz.
High / low Pressure:	32 / 6 bar 464 / 87 psig
Air flow volume (system / unimpeded):	Ambient air circuit: 645 / 850 m ³ /h Enclosure air circuit: 483 / 850 m ³ /h
Operating Temperature Range:	5°C - 55°C
Mounting:	Roof mounted
Dimensions A x B x C (D+E):	412 x 595 x 395 mm
Weight:	41.75 kg
Voltage / Frequency:	400/460 V - 50/60 Hz 2~
Current L35L35:	1.7 A
Starting current:	8 A
Max. current:	2.6 A
Nominal power L35L35:	722 W
Fuse:	15 A (T)
Short-circuit current rating:	5 kA
Connection:	4 pole connector for power 5 pole connector for signals 3 pole connector for RS 485 MODBUS

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SLIMLINE PRO TOP - roof mounted cooling units](#)

Performance graph:

[click image to enlarge](#)
Cut Out Dimension:

[click image to enlarge](#)

Order Information

Stainless steel housing part no.	95152002
Taric Code	84158200