

Roof mounted cooling unit



Description

Order Number:	950800001
Brand Name:	SLIMLINE PRO TOP
Colour:	RAL 7035
Housing Material:	Mild steel, powder coated
IP protection class to EN 60 529:	IP 54
Approvals:	CE, cURus

Technical Data


Cooling capacity L35L35 (EN14511-3):	850 W
Cooling capacity L35L50 (EN14511-3):	600 W
Compressor type:	Rotary piston
Refrigerant / GWP:	R513A / 630
Refrigerant charge:	133 g / 4.69 oz.
High / low Pressure:	28 / 6 bar 406 / 87 psig
Air flow volume (system / unimpeded):	Ambient air circuit: 850 m ³ /h Enclosure air circuit: 645 m ³ /h
Operating Temperature Range:	5°C - 55°C
Mounting:	Roof mounted
Dimensions A x B x C (D+E):	412 x 595 x 395 mm
Weight:	32 kg
Voltage / Frequency:	230 V ~ 50/60 Hz
Current L35L35:	2.5 / 2.9 A
Starting current:	6.0 A
Max. current:	3.4 A
Nominal power L35L35:	555 W
Fuse:	15 A (T)
Short-circuit current rating:	5 kA
Connection:	4 pole connector for power 5 pole connector for signals 3 pole connector for RS 485 MODBUS

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SLIMLINE PRO TOP - roof mounted cooling units](#)

Performance graph:

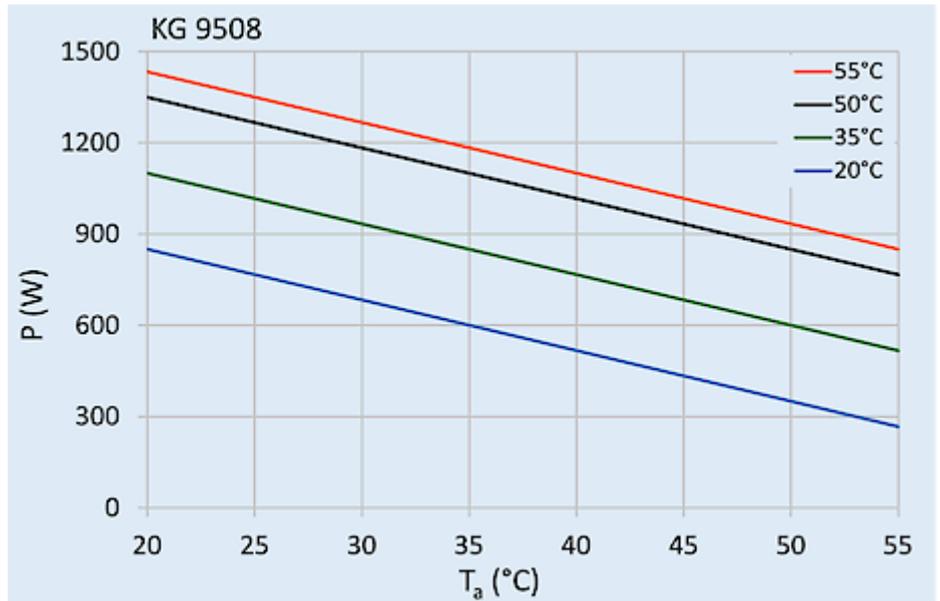

[click image to enlarge](#)

Cut out Dimensions:

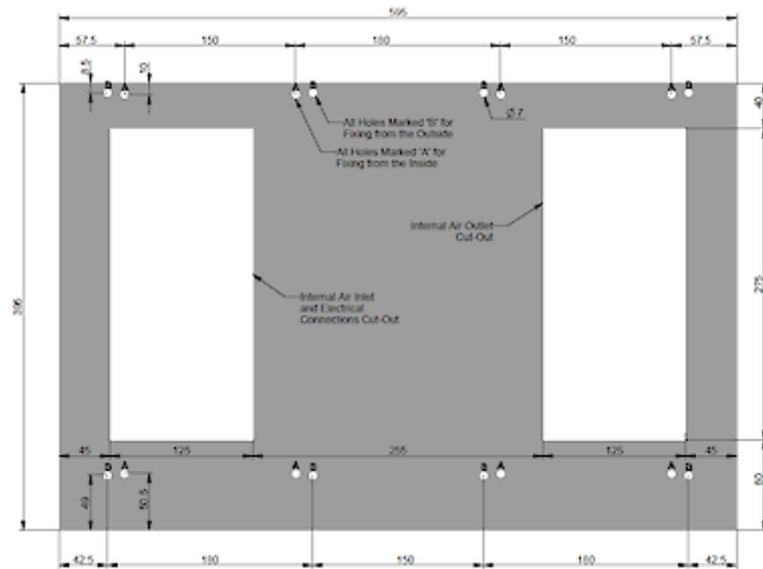

[click image to enlarge](#)

Order Information

Stainless steel housing part no.	950800S62
---	-----------

Taric Code	84158200
-------------------	----------