

CU Connect. Roof 1.5kW IP54



Description

| | |
|----------------------------|---------------------------|
| Order Number: | 952000001 |
| Brand Name: | SLIMLINE PRO TOP |
| Colour: | RAL 7035 |
| Housing Material: | Mild steel, powder coated |
| Ingress Protection: | IP 54 |
| Approvals: | CE |

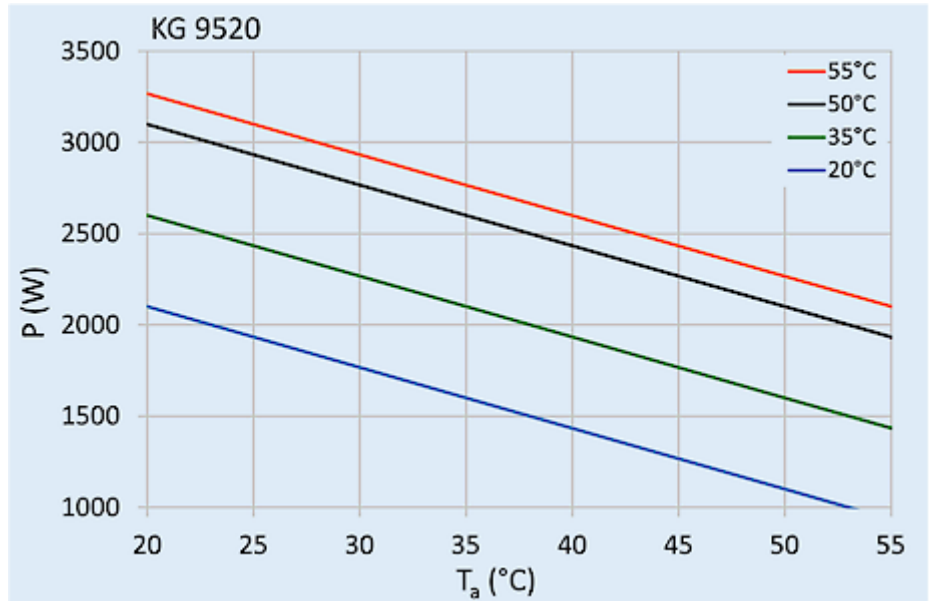
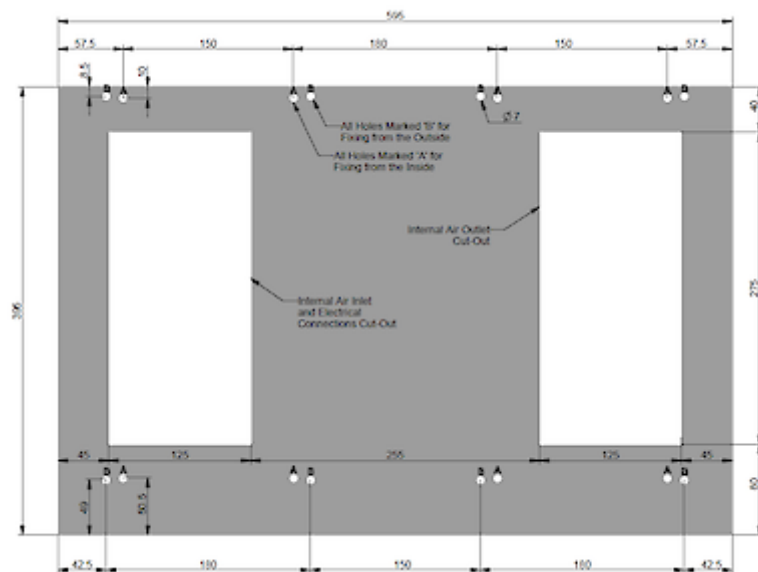
Technical Data

| | |
|--|--|
| Cooling capacity L35L35 (EN14511-3): | 2100 W |
| Cooling capacity L35L50 (EN14511-3): | 1600 W |
| Compressor type: | Rotary piston |
| Refrigerant / GWP: | R134a / 1430 |
| Refrigerant charge: | 320 g / 11.28 oz. |
| High / low Pressure: | 32 / 6 bar 464 / 87 psig |
| Operating Temperature Range: | 5°C - 55°C |
| Air flow volume (system / unimpeded): | Ambient air circuit: 1200 m ³ /h Enclosure air circuit: 602 m ³ /h |
| Mounting: | Roof mounted |
| Dimensions A x B x C (D+E): | 435 x 595 x 475 mm |
| Weight: | 40 kg |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| Current L35L35: | 4.0 A |
| Starting current: | 22 A |
| Max. current: | 5.4 A |
| Nominal power L35L35: | 906 W |
| Fuse: | 15 A (T) |
| Short-circuit current rating: | 5 kA |
| Connection: | 4 pole connector for power 5 pole connector for signals 3 pole connector for RS 485 MODBUS |

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SLIMLINE PRO TOP - roof mounted cooling units](#)

Performance graph:

[click image to enlarge](#)
Cut Out Dimension:

[click image to enlarge](#)

Order Information

| | |
|---|----------|
| Stainless steel housing part no. | 95200002 |
| Taric Code | 84158200 |