

Cooling unit NEMA / type 4X



Description

| | |
|--|--|
| Order Number: | 57052182 |
| Brand Name: | Compact Outdoor |
| Housing Material: | Stainless steel AISI 304 (V2A) |
| IP protection class to EN 60 529: | IP 56 / Type 12, 3, 3R, 4, 4X |
| Included: | With enclosure heater and aluminium filter |
| Approvals: | CE, cURus, cULus |
| UL File Number: | cURus (SA32278), cULus (E498756) |

Technical Data

| | |
|--|--|
| Cooling capacity L35L35 (EN14511-3): | 550 W @ 50 Hz 570 W @ 60 Hz |
| Cooling capacity L35L50 (EN14511-3): | 445W @ 50 Hz 490 W @ 60 Hz |
| Enclosure heater: | 400 W |
| Compressor type: | Rotary piston compressor |
| Refrigerant / GWP: | R513A / 630 |
| Refrigerant charge: | 226 g / 7.97 oz. |
| High / low Pressure: | 29 / 6 bar 425 / 88 psig |
| Air flow volume (system / unimpeded): | Ambient air circuit: 315 / 850 m ³ /h Cabinet air circuit: 165 / 250 m ³ /h |
| Operating Temperature Range: | -40°C - 55°C |
| Mounting: | Wall mounted |
| Dimensions A x B x C (D+E): | 830 x 304 x 270 mm |
| Weight: | 32 kg |
| Cut out dimensions: | 265 x 180 mm 265 x 160 mm |
| Voltage / Frequency: | 400/460 V - 50/60 Hz 2~ |
| UL Voltage / Frequency: | 400/460 V ~ 60 Hz 2~ |
| Current L35L35: | 1.2 A @ 50 Hz 1.1 A @ 60 Hz |
| Starting current: | 3.0 A |
| Max. current: | 1.9 A |
| Nominal power L35L35: | 422 W @ 50 Hz 432 W @ 60 Hz |
| Max. power: | 497 W @ 50 Hz 545 W @ 60 Hz |
| Fuse: | 15 A (T) |
| Max circuit ampacity: | 15 A |
| Short-circuit current rating: | 5 kA |
| Rated current compressor: | 0.9 A |

Full load current fans:

0.4 A

Connection:

4-pole terminal block for power

5-pole terminal block for signals


3-pole terminal block for RS 485

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group COMPACT OUTDOOR - cooling units NEMA / Type 4X](#)

Performance graph:

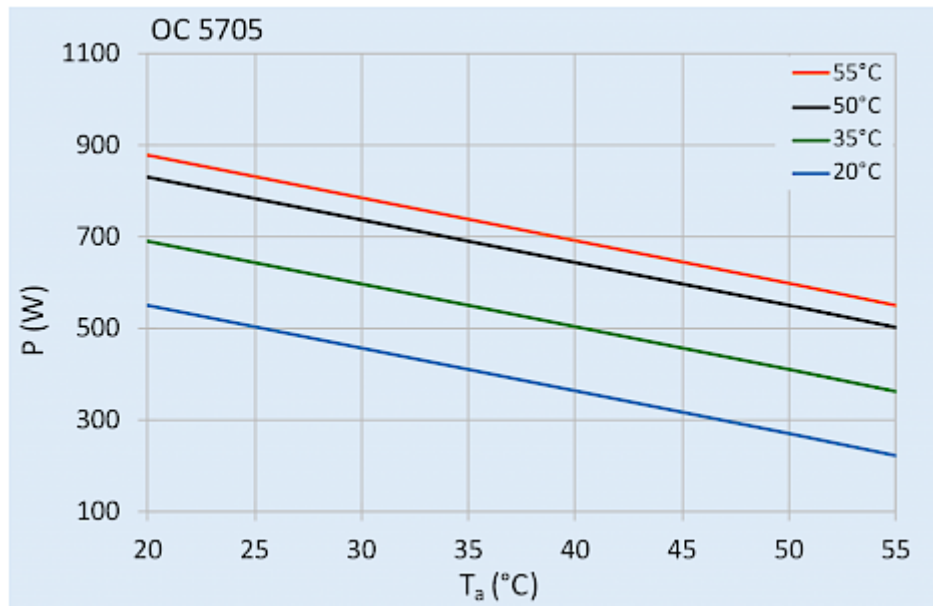

[click image to enlarge](#)

Cut out Dimensions:



[click image to enlarge](#)

Order Information

| | |
|--|--------------------|
| In stainless steel 316 (V4A) part no. | 57052184 |
| Box dimensions | 870 x 348 x 310 mm |
| Gross weight | 34 kg |
| Taric code | 84158200 |