

Filter Fan



Description

Order Number:	4883A4003
Brand Name:	SOLIFLEX
Colour:	RAL 9005
Housing Material:	ABS Plastic
IP protection class to EN 60 529:	IP 54, Type 12
Approvals:	CE, cURus, cULus
UL File Number:	E498756

Accessories:



[Hose-proof protection hood FC 4000 400](#)



[Hose-proof protection hood FC 4000 400 FDA](#)



[Adjustable Thermostat NO](#)



[Filter media](#)

Technical Data

Air flow unimpeded IP 54:	820 m ³ /h - 930 m ³ /h
Operating Temperature Range:	-10°C - +55°C
Static pressure:	210 Pa @ 50 Hz 220 Pa @ 60 Hz
Dimensions A x B x C (D+E):	325 x 325 x 158.5 mm
Weight:	4.25 kg
Cut out dimensions:	291 x 291 (+1.5) mm
Voltage / Frequency:	230 V ~ 50/60 Hz
Rated current:	0.55 A / 0.74 A
Power consumption:	125 / 166 W
Degree of separation IP 54:	85% - DIN 24185
Wall thickness:	1.5 - 2.5 mm
Filter class (ISO 16890):	G3 according to EN 779
Installation:	Elastic clips or by 4 self-threading screws
Noise level:	66 dB(A) @ 50 Hz 69.2 dB(A) @ 60 Hz


Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLIFLEX - Filter fans & exhaust filters](#)


Air flow:

Q = Air flow [cfm]
P = Static pressure [inH2O]

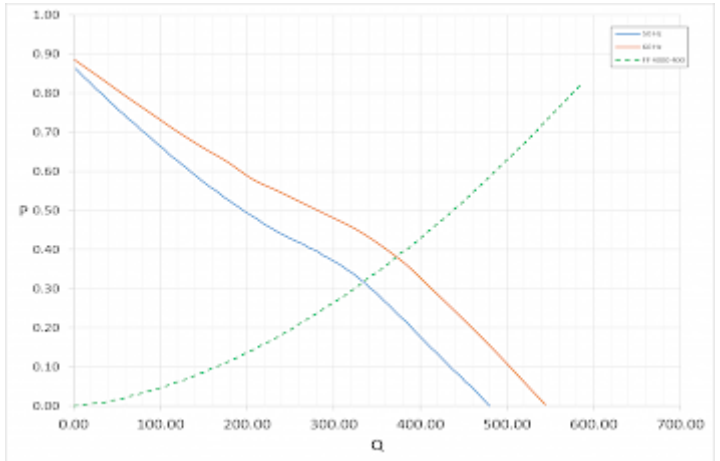

[click image to enlarge](#)

Cut Out Dimension:

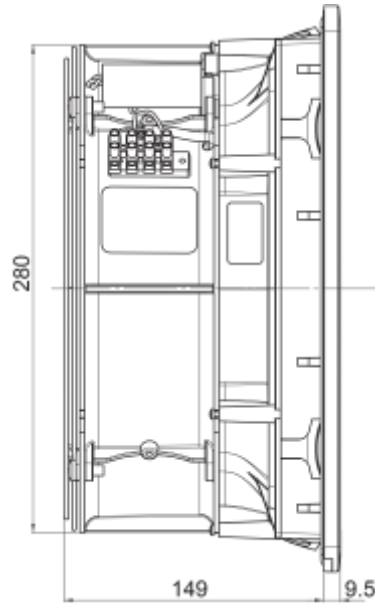

[click image to enlarge](#)

Order Information

Taric code	84145915
GTIN (EAN)	5350604100800