

## Fan assisted resistor heater



### Description


<b>Order Number:</b>	503251
<b>Brand Name:</b>	SOLIFLEX
<b>Colour:</b>	silver
<b>Housing Material:</b>	Aluminum
<b>IP protection class to EN 60 529:</b>	IP 20
<b>Note:</b>	PTC resistance self-regulating
<b>Approvals:</b>	CE, cURus
<b>Accessories:</b>	 <a href="#">Adjustable thermostat NC</a>

## Technical Data

<b>Heating power at 10°C:</b>	250 W
<b>Operating Temperature Range:</b>	-25°C - 70°C
<b>Mounting:</b>	DIN rail
<b>Dimensions A x B x C (D+E):</b>	135 x 82 x 112 mm
<b>Weight:</b>	0.88 kg
<b>Voltage / Frequency:</b>	120 V ~ 50/60 Hz
<b>Max. current:</b>	2.4 A
<b>Fan air flow, approx.:</b>	35 m <sup>3</sup> /h
<b>Connection:</b>	3 screw terminals for stranded or rigid wire 2.5 mm <sup>2</sup>

Please click on the graphics to download.  
More CAD drawings can be found under [Product Download](#).  
> [Overview Product Group SOLIFLEX - enclosure Heaters](#)

**Cut out Dimensions:**

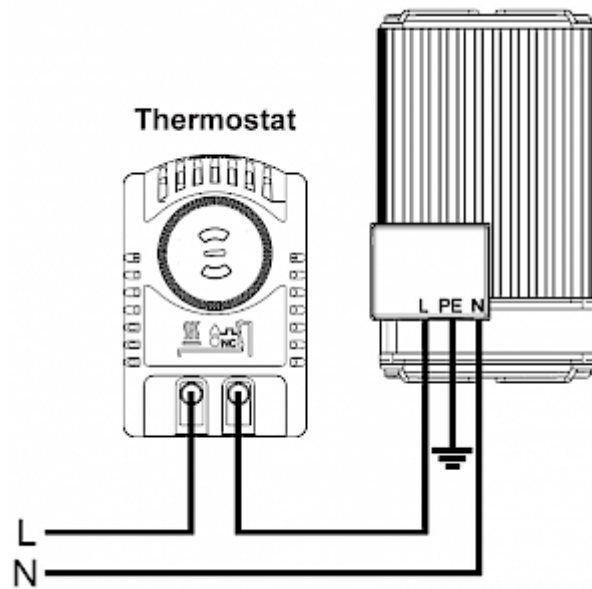

[click image to enlarge](#)

## Order Information

<b>Taric code</b>	85162999
<b>GTIN (EAN)</b>	5350604020115