

## Filter fan SF 4725 - 230V



### Description

<b>Order Number:</b>	4725082201
<b>Brand Name:</b>	SOLIVENT PRO
<b>Colour:</b>	RAL 7035
<b>Housing Material:</b>	PC plastic
<b>IP protection class to EN 60 529:</b>	IP 54
<b>UL Typ (UL 50E):</b>	12
<b>Note:</b>	IP 55 with filter O3 (see manual)
<b>Approvals:</b>	CE, cURus, cULus
<b>UL File Number:</b>	E498756

#### Accessories:



[Hose-proof protection hood FC 4000 300](#)



[Hose-proof protection hood FC 4000 300 FDA](#)



[Thermostat 301050](#)

## Technical Data


<b>Air flow unimpeded IP 54:</b>	235 / 264 m <sup>3</sup> /hr
<b>Air flow with exhaust filter IP 54:</b>	167 / 200 m <sup>3</sup> /hr
<b>Operating Temperature Range:</b>	-10°C - 60°C
<b>Storage temperature range:</b>	-40°C - 70°C
<b>Mounting:</b>	Wall mounted
<b>Dimensions A x B x C (D+E):</b>	255.4 x 255.5 x 112.5 (11.6+100.9) mm
<b>Weight:</b>	1.8 Kg
<b>Cut out dimensions:</b>	224 x 224 mm
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>Rated current:</b>	0.31 / 0.25 A
<b>Power consumption:</b>	45 / 39 W
<b>Degree of separation IP 54:</b>	67 % - DIN 24185
<b>Degree of separation IP 55:</b>	85 % - DIN 24185
<b>Wall thickness:</b>	1-3 mm
<b>Noise level:</b>	53 dB (A)
<b>Fuse:</b>	1 A (T)
<b>Connection:</b>	Spring terminal

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SOLIVENT PRO - Filter fans & exhaust filters](#)

**Air flow:**

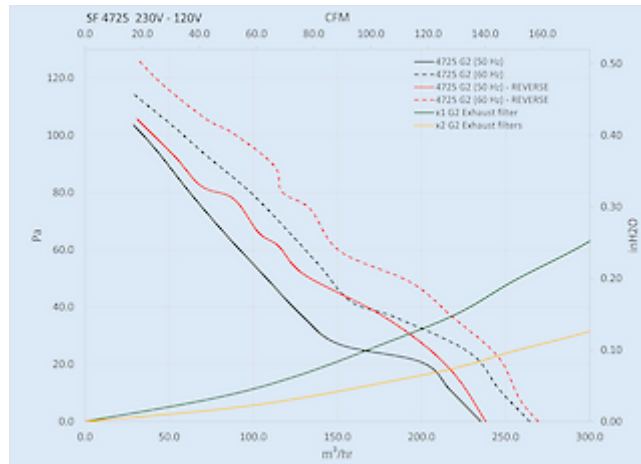

click image to enlarge

**Cooling capacity:**

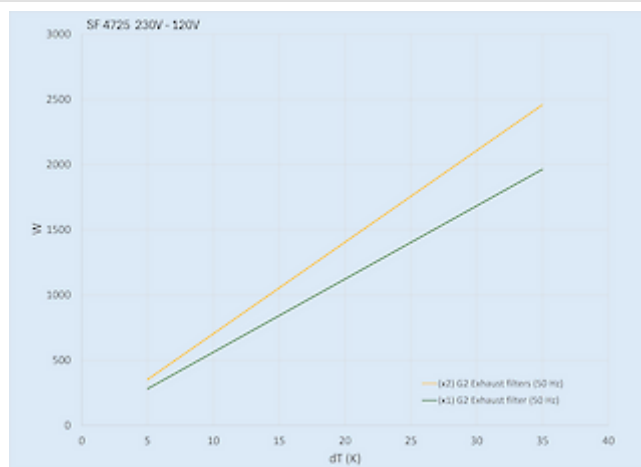

click image to enlarge

**Cut out Dimensions:**



click image to enlarge

## Order Information

Order number	IP rating	UL Type	RAL colour	Flow type <sup>1)</sup>	Air flow (m <sup>3</sup> /h) <sup>2)</sup>	Air flow with exhaust filter (m <sup>3</sup> /h)
4725082201	54	12 / 3R	RAL 7035	B	235 / 264 m <sup>3</sup> /hr	167 / 200 m <sup>3</sup> /hr
4725082203	54	12 / 3R	RAL 9005	B	235 / 264 m <sup>3</sup> /hr	167 / 200 m <sup>3</sup> /hr
4725083201	55	12 / 3R	RAL 7035	B	222 / 249 m <sup>3</sup> /hr	138 / 170 m <sup>3</sup> /hr
4725083203	55	12 / 3R	RAL 9005	B	222 / 249 m <sup>3</sup> /hr	138 / 170 m <sup>3</sup> /hr
472508R2201	54	12 / 3R	RAL 7035	S	238 / 269 m <sup>3</sup> /hr	N/A
472508R2203	54	12 / 3R	RAL 9005	S	238 / 269 m <sup>3</sup> /hr	N/A
472508R3201	55	12 / 3R	RAL 7035	S	220 / 252 m <sup>3</sup> /hr	N/A
472508R3203	55	12 / 3R	RAL 9005	S	220 / 252 m <sup>3</sup> /hr	N/A

<sup>1)</sup> B = Blowing - from ambient into the enclosure (standard version)  
S = Suction - from enclosure to ambient (on request)

<sup>2)</sup> unimpeded 50/60 Hz

**Taric ode** 84145915