



Cabinet cooling unit



Description

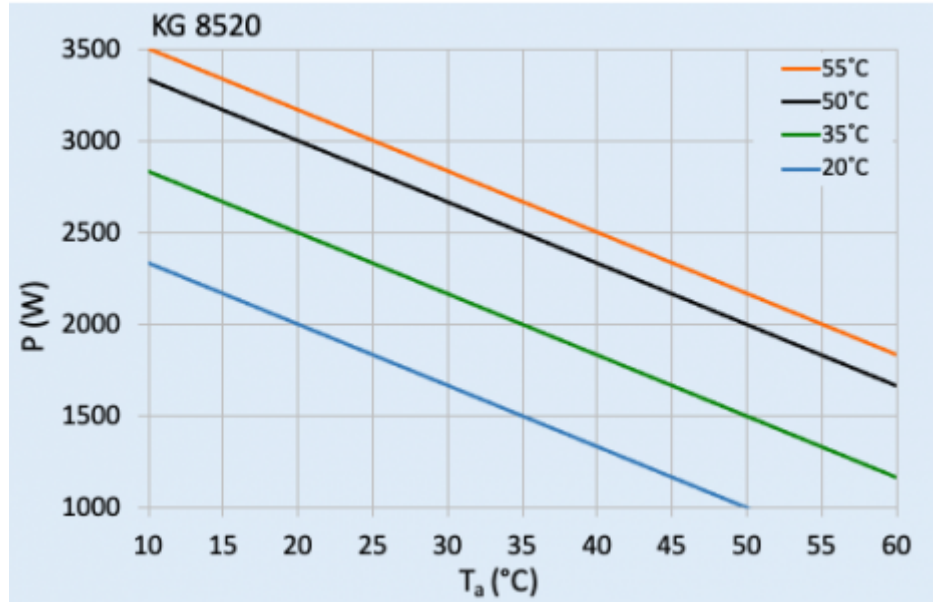
| | |
|--|--|
| Order Number: | 852020S62 |
| Brand Name: | SLIMLINE PRO |
| Housing Material: | Stainless steel AISI 304 (V2A) |
| IP protection class to EN 60 529: | IP 56 / Type 12, 3, 3R, 4, 4X |
| Approvals: | CE, cURus, cULus |
| Accessories: | <div style="display: flex; align-items: center; margin-bottom: 10px;">  <div style="margin-left: 10px;">Vibration Protection Kit 2</div> </div> <div style="display: flex; align-items: center; margin-bottom: 10px;">  <div style="margin-left: 10px;">Cold Air Outlet Duct 8515/20/25</div> </div> <div style="display: flex; align-items: center;">  <div style="margin-left: 10px;">Washable Aluminium Filter 8515/20/25</div> </div> |

Technical Data

| | |
|--|---|
| Cooling capacity L35L35 (EN14511-3): | 2.0 kW @ 50 Hz 2.0 kW @ 60 Hz |
| Cooling capacity L35L50 (EN14511-3): | 1.7 kW @ 50 Hz 1.75 kW @ 60 Hz |
| EER L35L35: | 2.0 |
| Compressor type: | Rotary Piston |
| Refrigerant / GWP: | R 513A / 630 |
| Refrigerant charge: | 373 g / 13.2 oz |
| High / low Pressure: | 30 / 6 bar 435 / 88 psig |
| Air flow volume (system / unimpeded): | Ambient air circuit: 680 / 1200 m ³ /h Cabinet air circuit: 500 / 850 m ³ /h |
| Operating Temperature Range: | 10°C - 60°C |
| UL temperature range: | 10°C - 60°C |
| Mounting: | Wall mounted / recessed |
| Dimensions A x B x C (D+E): | 1,350 x 395 x 210 (55+155) mm |
| Weight: | 48.7 kg |
| Voltage / Frequency: | 380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~ |
| UL Voltage / Frequency: | 460 V / 60Hz 3~ |
| Current L35L35: | 1.9 A @ 50 Hz 2.0 A @ 60 Hz |
| Starting current: | 8 A |
| Max. current: | 2.4 A |
| Nominal power L35L35: | 980 W @ 50 Hz 1240 W @ 60 Hz |
| Max. power: | 1650 W |
| Fuse: | 15 A (T) |
| Max circuit ampacity: | 15 A |
| Short-circuit current rating: | 5 kA |

| | |
|----------------------------------|--|
| Rated current compressor: | 1.3 A |
| Full load current fans: | 1.3 A |
| Connection: | 4 pole terminal block for power 5 pole terminal block for signals 3 pole terminal block for RS 485 |

Please click on the graphics to download.
More CAD drawings can be found under [Product Download](#).
> [Overview Product Group SLIMLINE PRO - cooling units in a new design](#)

Performance graph:

[click image to enlarge](#)
Cut Out Dimension:

[click image to enlarge](#)

Order Information

| | |
|-----------------------|---------------------|
| Box dimensions | 1042 x 405 x 242 mm |
| Gross weight | 54 Kg |
| Taric code | 84158200 |