


## Enclosure light 400 Lm

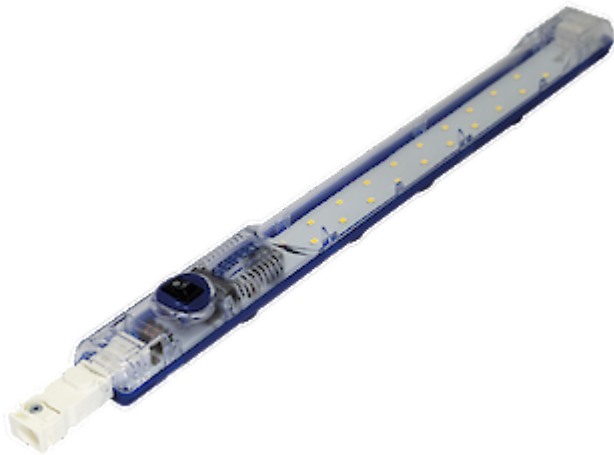

## Description

|  |   |
|--|---|
| <b>Order Number:</b>                     | 400100FC                                  |
| <b>Brand Name:</b>                       | stripLite                                 |
| <b>Colour:</b>                           | Top cover transparent / body blue         |
| <b>Housing Material:</b>                 | PC plastic                                |
| <b>IP protection class to EN 60 529:</b> | IP 20                                     |
| <b>Included:</b>                         | On / OFF Switch, Wieland female connector |
| <b>Note:</b>                             | class II                                  |
| <b>Approvals:</b>                        | CE, cURus                                 |

## Technical Data


|                                     |                                   |
|-------------------------------------|-----------------------------------|
| <b>Operating Temperature Range:</b> | -30°C - 70°C<br>UL max temp: 60°C |
| <b>Mounting:</b>                    | Magnets / Clips                   |
| <b>Dimensions A x B x C (D+E):</b>  | 357.4 x 32 x 35.5 mm              |
| <b>Voltage / Frequency:</b>         | 24-265 V DC/AC ~ 0/50/60 Hz       |
| <b>Power consumption:</b>           | 4 Watt                            |
| <b>Luminosity:</b>                  | 400 Lm                            |
| <b>Lifetime:</b>                    | 50.000 hrs. @ 20°C                |
| <b>Connection:</b>                  | Connector system                  |

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group Energy-saving LED enclosure Lamps](#)

**Cut out  
Dimensions:**

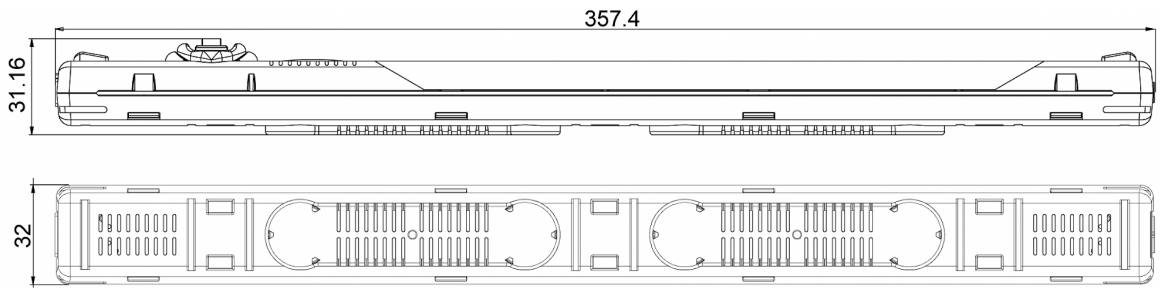

[click image to enlarge](#)

## Order Information

**HS code** 94054231

---