

Filter fan SF 4714 -100-240V



Description

Order Number:	4714833203
Brand Name:	SOLIVENT PRO
Colour:	RAL 9005
Housing Material:	PC plastic
IP protection class to EN 60 529:	IP 54
UL Typ (UL 50E):	12
Approvals:	CE, cURus, cULus
UL File Number:	E498756

Accessories:



[Hose-proof protection hood FC 4000 100](#)



[Hose-proof protection hood FC 4000 100 FDA](#)

Technical Data


Air flow unimpeded IP 54:	68 m ³ /hr
Air flow with exhaust filter IP 54:	48 m ³ /hr
Air flow with 2 exhaust filters IP 54:	56 m ³ /hr
Operating Temperature Range:	-40°C - 70°C
Storage temperature range:	-40°C - 70°C
Mounting:	Wall mounted
Dimensions A x B x C (D+E):	147.5 x 147.5 x 82.6 (11.6+71) mm
Weight:	0.6 kg
Cut out dimensions:	124 x 124 mm
Voltage / Frequency:	100-240 VAC ~ 50/ 60 Hz
Rated current:	0.18 / 0.18 A
Power consumption:	15 / 15 W
Noise level:	51.5 dB(A)
Fuse:	1 A (T)
Connection:	Spring clamp

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group SOLIVENT PRO - Filter fans & exhaust filters](#)

Air flow:

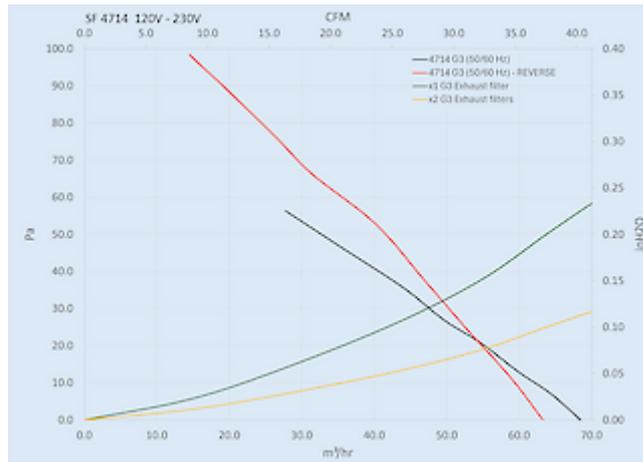


click image to enlarge

Cooling capacity:

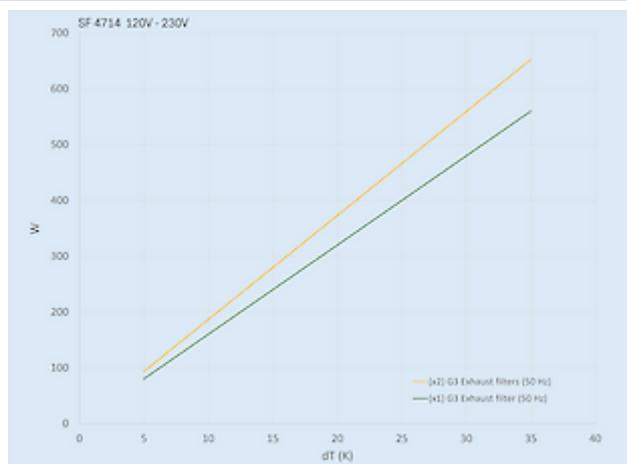

click image to enlarge

Cut out Dimensions:

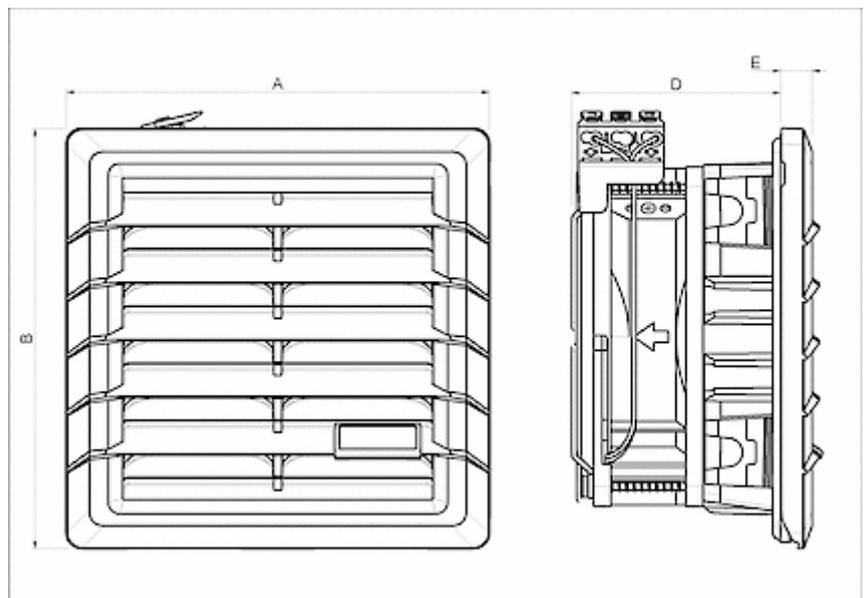

click image to enlarge

Order Information

Order number	IP rating	UL Type	RAL colour	Flow type ¹⁾	Air flow (m ³ /h) ²⁾	Air flow with exhaust filter (m ³ /h)
4714833201	54	12 / 3R	RAL 7035	B	68 m ³ /hr	48 m ³ /hr
4714833203	54	12 / 3R	RAL 9005	B	68 m ³ /hr	48 m ³ /hr
471483R3201	54	12 / 3R	RAL 7035	S	63 m ³ /hr	N/A
471483R3203	54	12 / 3R	RAL 9005	S	63 m ³ /hr	N/A

¹⁾ B = Blowing - from ambient into the enclosure (standard version)
 S = Suction - from enclosure to ambient (on request)

²⁾ unimpeded 50/60 Hz