


## Filter Fan



## Description

<b>Order Number:</b>	4883A4103
<b>Brand Name:</b>	SOLIFLEX
<b>Colour:</b>	RAL 9005
<b>Housing Material:</b>	ABS Plastic
<b>IP protection class to EN 60 529:</b>	IP 54, Type 12
<b>Note:</b>	Reverse air flow
<b>Approvals:</b>	CE, cURus, cULus
<b>UL File Number:</b>	E498756

### Accessories:

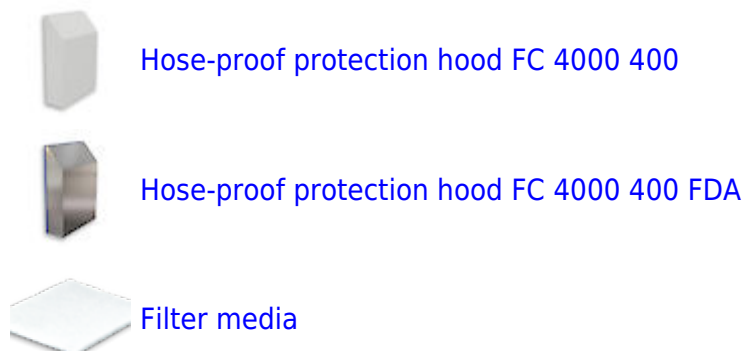

## Technical Data

<b>Air flow unimpeded IP 54:</b>	820 m <sup>3</sup> /h - 930 m <sup>3</sup> /h
<b>Operating Temperature Range:</b>	-10°C - +55°C
<b>Static pressure:</b>	210 Pa @ 50 Hz 220 Pa @ 60 Hz
<b>Dimensions A x B x C (D+E):</b>	325 x 325 x 158.5 mm
<b>Weight:</b>	4.25 kg
<b>Cut out dimensions:</b>	291 x 291 (+1.5) mm
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>Rated current:</b>	0.55 A / 0.74 A
<b>Power consumption:</b>	125 / 166 W
<b>Degree of separation IP 54:</b>	85% - DIN 24185
<b>Wall thickness:</b>	1.5 - 2.5 mm
<b>Filter class (ISO 16890):</b>	G3 according to EN 779
<b>Installation:</b>	Elastic clips or by 4 self-threading screws
<b>Noise level:</b>	66 dB(A) @ 50 Hz 69.2 dB(A) @ 60 Hz


Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).

> [Overview Product Group SOLIFLEX - Filter fans & exhaust filters](#)


**Air flow:**

Q = Air flow [cfm]  
P = Static pressure [inH2O]

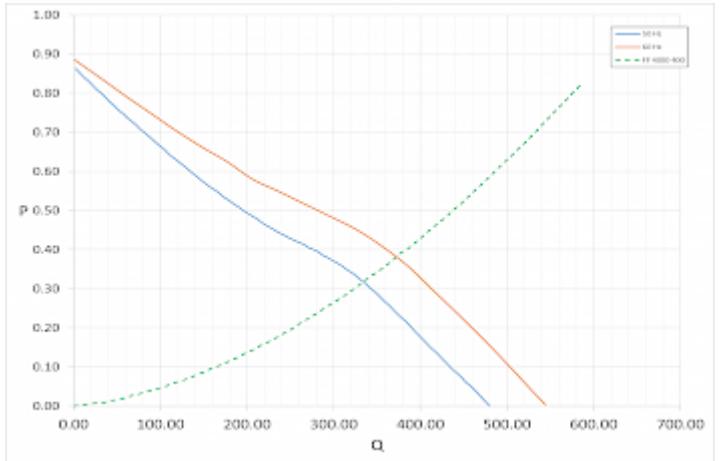

[click image to enlarge](#)

**Cut Out Dimension:**

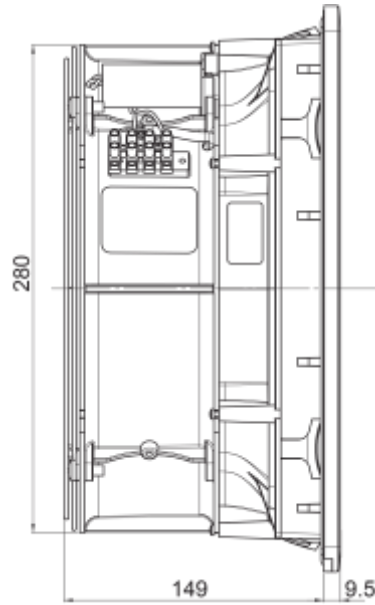

[click image to enlarge](#)

## Order Information

<b>Taric code</b>	84145915
<b>GTIN (EAN)</b>	5350604100800