

## Enclosure air conditioner



## Description

<b>Order Number:</b>	85129612
<b>Brand Name:</b>	SLIMLINE PRO
<b>Color:</b>	RAL 7035
<b>Housing Material:</b>	Mild steel, powder coated
<b>Ingress protection to EN 60 529:</b>	Type 3, 3R, 12, 4
<b>Sk Hinweis:</b>	Voltage sticker PR596030690 next to electrical connection. Packing bag without cable grommets and covering plate. Customer will make a cable relief with the existing fixing point, but does not use the cover / grommet
<b>Approvals:</b>	CE, cURus, cULus

## Technical data

<b>Cooling capacity 95F/95F:</b>	4100 BTU @ 50 Hz 4300 BTU @ 60 Hz
<b>Cooling capacity 95F/122F:</b>	3070 BTU @ 50 Hz 3400 BTU @ 60 Hz
<b>EER 95F95F:</b>	1.71
<b>Compressor type:</b>	Rotary piston
<b>Refrigerant / GWP:</b>	R 513A / 630
<b>Refrigerant charge:</b>	230 g / 8.1 oz.
<b>High / low pressure:</b>	30 / 6 bar 435 / 88 psi
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 176 / 323 cfm Cabinet air circuit: 206 / 323 cfm
<b>Operating temperature range:</b>	50°F - 140°F
<b>UL temperature range:</b>	50°F - 140°F
<b>Mounting:</b>	Wall mounted / recessed
<b>Dimension H x W x D:</b>	37.5 x 12.1 x 8.3 inch
<b>Weight:</b>	72.75 lbs.
<b>Voltage / Frequency:</b>	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
<b>UL Voltage / Frequency:</b>	460 V / 60Hz 3~
<b>Current 95F95F:</b>	1.6 A @ 50 Hz 1.6 A @ 60 Hz
<b>Starting current:</b>	8.2 A
<b>Max. current:</b>	2.0 A
<b>Nominal power 95F95F:</b>	700 W @ 50 Hz 875 W @ 60 Hz
<b>Max. power:</b>	1.2 kW
<b>Fuse:</b>	15 A (T)
<b>Max circuit ampacity:</b>	15 A
<b>Short-circuit current rating:</b>	5 kA
<b>Rated current compressor:</b>	1.3 A

**Full load current fans:**

1.3 A

---

**Connection:**


4-poliger Stecker für Strom

5-poliger Stecker für Signale


3-poliger Stecker für RS 485 MODBUS

---

**Performance graph:**

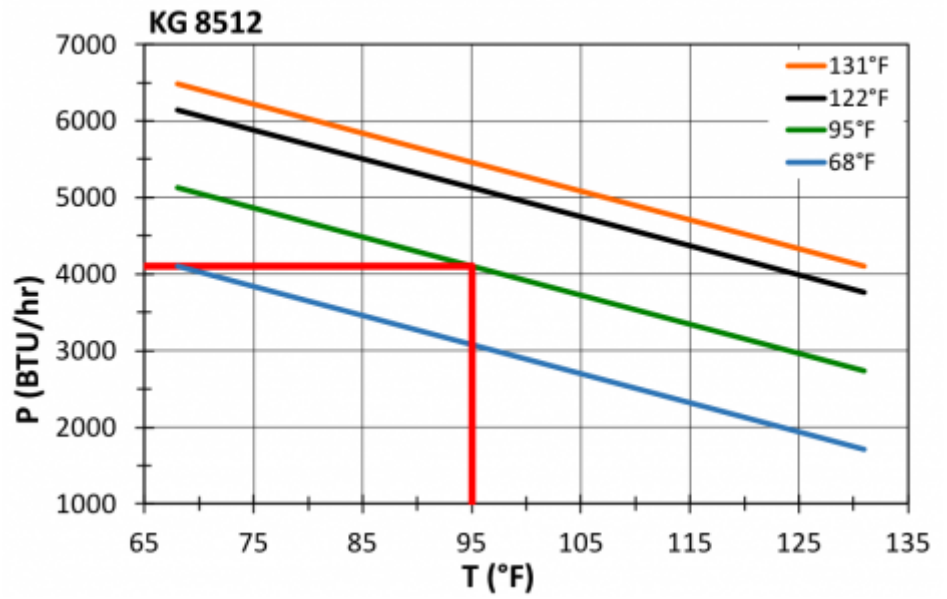

**Cut out Dimensions:**

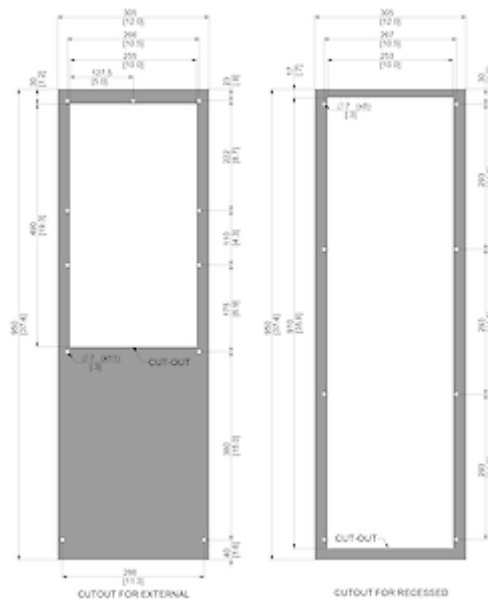

## Order Information

<b>Verpackungsmaße</b>	1042 x 405 x 242 mm
<b>Bruttogewicht</b>	36 Kg
<b>Zolltarifnummer</b>	84158200