

## Thermoelectric cooler




## Description

<b>Order Number:</b>	0905718422
<b>Brand Name:</b>	SoliTherm
<b>Housing Material:</b>	Stainless steel AISI 316 (V4A)
<b>Ingress protection to EN 60 529:</b>	IP 66 / UL Type 12, 4, 4X
<b>Note:</b>	The torque for the mounting nuts should be 4.5 Nm.
<b>Approvals:</b>	CE


## Technical data

<b>Cooling capacity 95F/95F:</b>	160 W
<b>Cooling capacity 95F/122F:</b>	98 W
<b>Air volume flow (system / unimpeded):</b>	Umgebungskreislauf: 150 m <sup>3</sup> /h Schrankkreislauf: 150 m <sup>3</sup> /h
<b>Operating temperature range:</b>	-4°F - 158°F
<b>UL temperature range:</b>	-4°F - 149°F
<b>Mounting:</b>	Halbeinbau
<b>Dimension H x W x D:</b>	19 x 10 x 6.4 inch
<b>Weight:</b>	14.6 kg
<b>Cut out dimensions:</b>	358 x 215 mm
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>Current 95F95F:</b>	0.9 A
<b>Starting current:</b>	1.1 A
<b>Max. current:</b>	2 A
<b>Nominal power 95F95F:</b>	190 W
<b>Max. power:</b>	300 W
<b>Fuse:</b>	4 A (T)
<b>Connection:</b>	Anschlusskabel

**Performance graph:**

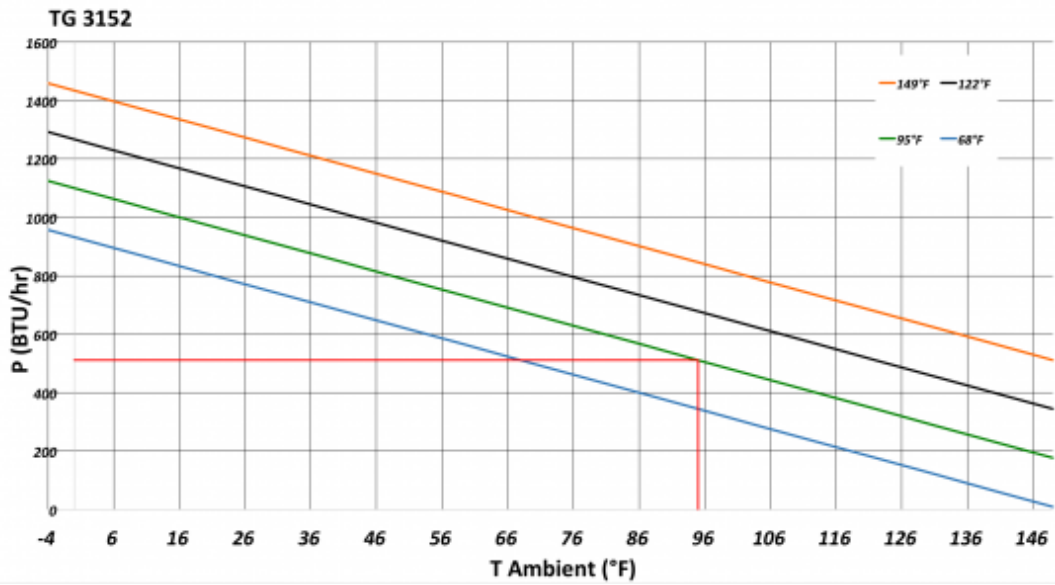

**Air flow:**

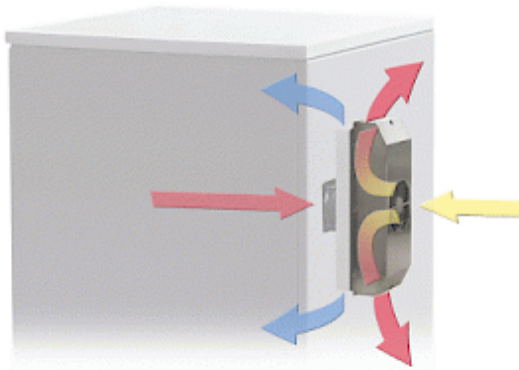

**Cut out Dimensions:**

