

## SOLITHERM PROTEC



### Description


<b>Order Number:</b>	87122584
<b>Brand Name:</b>	SOLITHERM PROTEC
<b>Housing Material:</b>	Stainless steel AISI 316 (V4A)
<b>Ingress protection to EN 60 529:</b>	IP 56 / Type 12, 3, 3R, 4, 4X
<b>Approvals:</b>	CE, UL(ACVS), cULus
<b>UL File Number:</b>	SA32278

## Technical data


<b>Cooling capacity 95F/95F:</b>	1120 W @ 50 Hz 1200 W @ 60 Hz
<b>Cooling capacity 95F/122F:</b>	800 W @ 50 Hz 840 W @ 60 Hz
<b>EER 95F95F:</b>	1.6 / 1.4
<b>Enclosure heater:</b>	400 W
<b>Compressor type:</b>	Reciprocating compressor
<b>Refrigerant / GWP:</b>	R 513A / 630
<b>Refrigerant charge:</b>	234 g / 8.3 oz
<b>High / low pressure:</b>	30 / 6 bar 435 / 88 psi
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 280 / 550 m <sup>3</sup> /h  Cabinet air circuit: 300 / 470 m <sup>3</sup> /h
<b>Operating temperature range:</b>	-40 °C - 60 °C
<b>UL temperature range:</b>	-40 °C - 60 °C
<b>Mounting:</b>	Wall mounted
<b>Dimension H x W x D:</b>	23 x 12 x 12 inch
<b>Weight:</b>	35 kg
<b>Cut out dimensions:</b>	13.6 x 9.3 inch
<b>Voltage / Frequency:</b>	400/460 V - 50/60 Hz 2~
<b>UL Voltage / Frequency:</b>	460 V / 60 Hz 2~
<b>Current 95F95F:</b>	2.0 A @ 50 Hz 2.2 A @ 60 Hz
<b>Starting current:</b>	8.6 A
<b>Max. current:</b>	3.0 A
<b>Nominal power 95F95F:</b>	720 W @ 50 Hz 840 W @ 60 Hz
<b>Max. power:</b>	1100 W
<b>Fuse:</b>	15 A (T)
<b>Max circuit ampacity:</b>	15 A

<b>Short-circuit current rating:</b>	5 kA
<b>Rated current compressor:</b>	1.3 A
<b>Full load current fans:</b>	0.4 A
<b>Connection:</b>	5 pole terminal block for signals 4 pole terminal block for power 3 pole terminal block for RS 485 MODBUS

**Performance graph:**

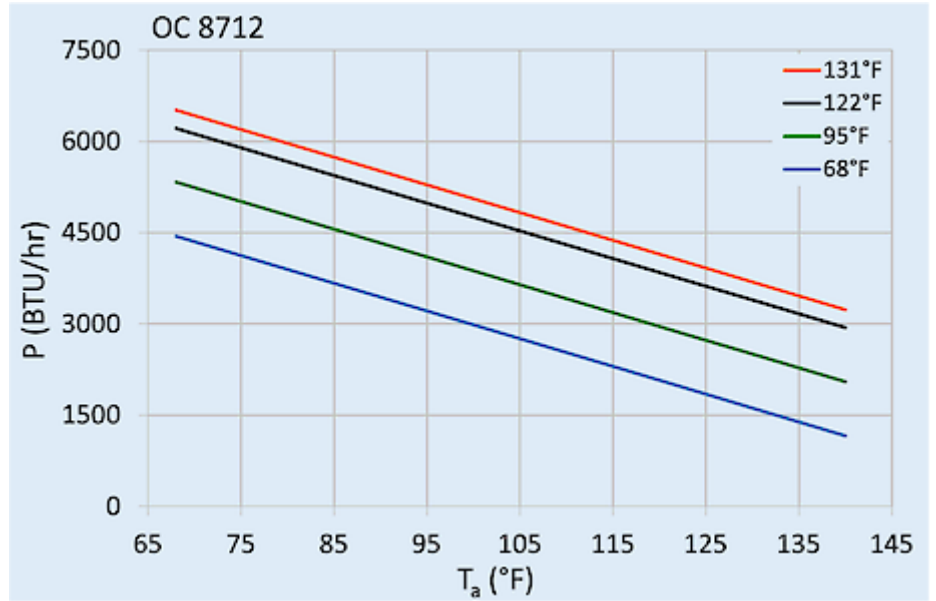

**Cut out Dimensions:**

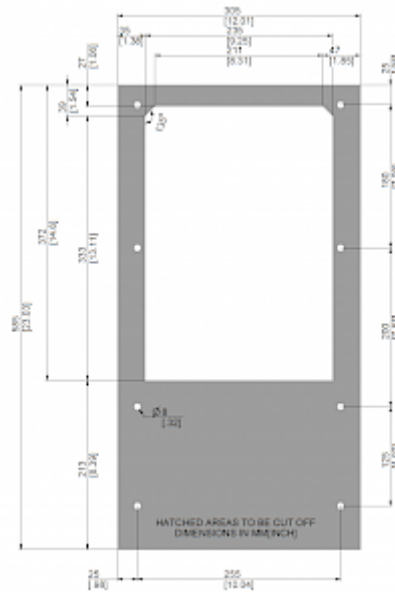

## Order Information

**Zolltarifnummer**

84158200

---