





## Description

|   |                                 |
|---|---------------------------------|
| <b>Order Number:</b>                    | 3100001                         |
| <b>Housing Material:</b>                | ABS Plastic                     |
| <b>Ingress protection to EN 60 529:</b> | IP 65                           |
| <b>Included:</b>                        | 2 x M4 Schrauben, Montageplatte |
| <b>Approvals:</b>                       | CE, cURus                       |

## Technical data

|                                     |  |
|-------------------------------------|--|
| <b>Operating temperature range:</b> | -13°F - +158°F   |
| <b>Mounting:</b>                    | 2 x M4 screws  |
| <b>Dimension H x W x D:</b>         | 2.87 x 1.19 x 1.18 in.   |
| <b>Voltage / Frequency:</b>         | 24 - 400 V AC / 50-60 Hz<br>24 - 250 V DC  |
| <b>Rated current:</b>               | AC: 10 - 1.8 A<br>DC: 28 - 0.27 A  |
| <b>Connection:</b>                  | Screws terminal for electrical connection<br>and one cable inlet for PG 13.5 cable gland |

**Air flow:**

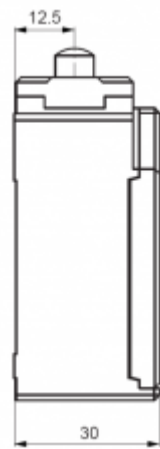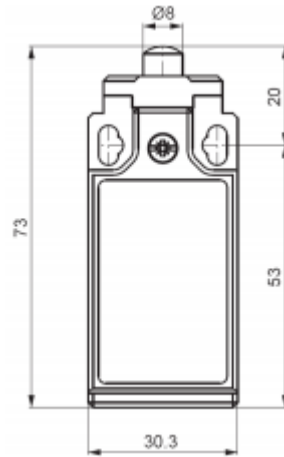

## Order Information

|                        |               |
|------------------------|---------------|
| <b>Zolltarifnummer</b> | 85381000      |
| <b>EAN Nummer</b>      | 5350604010628 |