

Filterless enclosure air conditioner




Description

| | |
|----------------------------|---------------------------|
| Order Number: | 42661001 |
| Brand Name: | SLIMLINE |
| Color: | RAL 7035 |
| Housing Material: | Mild steel, powder coated |
| Ingress protection: | TYPE 12 |
| Approvals: | CE, cURus, cULus |


Technical data

| | |
|--|---|
| Cooling capacity 95F/95F: | 1130 BTU |
| Cooling capacity 95F/122F: | 1060 BTU (122F/122F) |
| Compressor type: | Rotary piston compressor |
| Refrigerant / GWP: | R134a / 1430 |
| Refrigerant charge: | 96 g / 3.4 oz |
| High / low pressure: | 35 / 30 bar 250 / 220 psig |
| Operating temperature range: | 50°F - 122°F |
| Air volume flow (system / unimpeded): | Ambient air circuit: 100 cfm Cabinet air circuit: 74 cfm |
| Mounting: | Wall mounted / Recessed |
| Dimension H x W x D: | 20.5 x 10.6 x 4.3 inch |
| Weight: | 29 lbs. |
| Cut out dimensions: | 19.7 x 9.9 inch |
| Voltage / Frequency: | 120 V ~ 60 Hz |
| Current 95F95F: | 3.5 A |
| Starting current: | 7.1 A |
| Max. current: | 3.6 A |
| Nominal power 95F95F: | 315 W |
| Max. power: | 375 W |
| Fuse: | 6 A (T) |
| Short-circuit current rating: | 5 kA |
| Rated current compressor: | 9.2 A |
| Full load current fans: | 3.6 A |
| Connection: | Connection terminal block |


Performance graph:

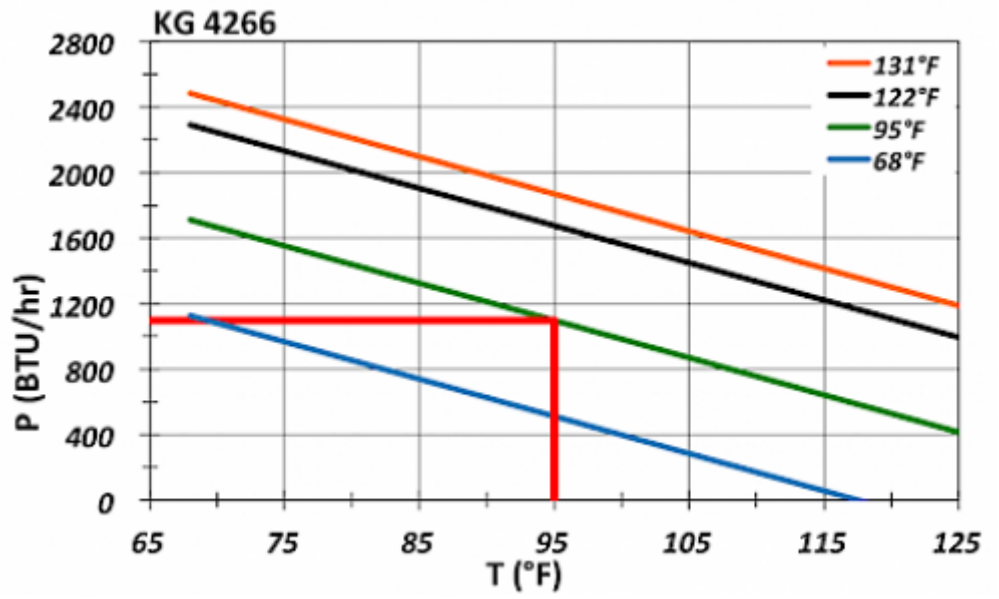

Air flow:

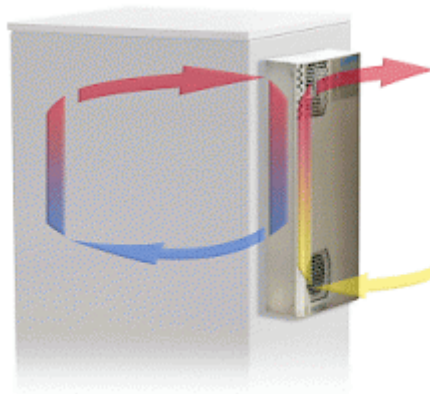

Cut out dimensions:

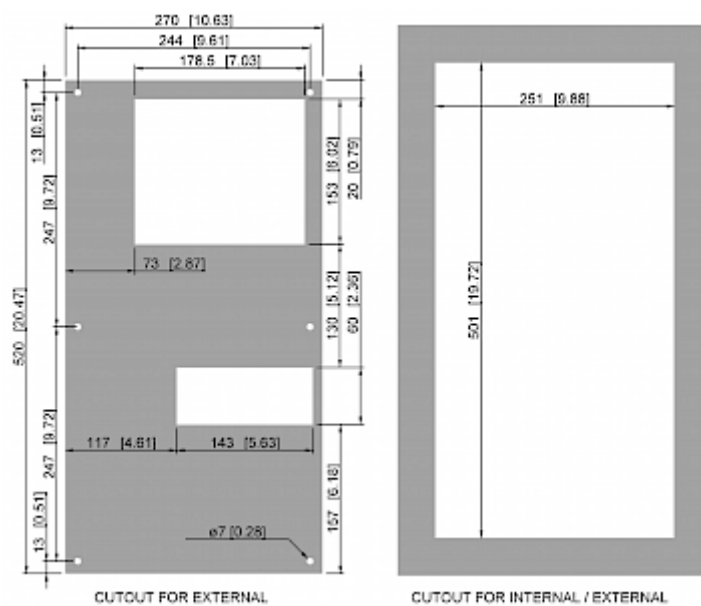

Order Information

Verpackungsmaße 580 x 290 x 150 mm

Bruttogewicht 14.5 kg

Taric code 84158200

GTIN (EAN) 5350604370135