

Filterless enclosure air conditioner



Description

Order Number: 42712001

Brand Name: SLIMLINE

Color: RAL 7035

Housing Material: Mild steel, powder coated

Ingress protection:TYPE 12


Note: Bei 400 V / 3~ Geräten ist kein zusätzlicher Mittelpunktleiter erforderlich.

Approvals: CE / cURus


Technical data

| | |
|--|--|
| Cooling capacity 95F/95F: | 3020 BTU |
| Cooling capacity 95F/122F: | 1810 BTU |
| Compressor type: | Rotary piston compressor |
| Refrigerant / GWP: | R134a / 1430 |
| Refrigerant charge: | 280 g / 9.9 oz |
| High / low pressure: | 37 / 9.6 bar 406 / 148 psig |
| Operating temperature range: | 50°F - 131°F |
| Air volume flow (system / unimpeded): | Ambient air circuit: 188 / 383 cfm Cabinet air circuit: 171 / 324 cfm |
| Mounting: | Wall mounted / Recessed |
| Dimension H x W x D: | 38.58 x 15.55 x 5.71 in. |
| Weight: | 84 lbs. |
| Cut out dimensions: | 37.83 x 14.80 in. |
| Voltage / Frequency: | 380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~ |
| Current 95F95F: | 1.8 A @ 50 Hz 2.1 A @ 60 Hz |
| Starting current: | 8.2 A |
| Max. current: | 2.9 A |
| Nominal power 95F95F: | 660 W @ 50 Hz 760 W @ 60 Hz |
| Max. power: | 840 W |
| Fuse: | 3 x 6 A (T) |
| Max circuit ampacity: | 15 A |
| Short-circuit current rating: | 5 kA |
| Rated current compressor: | 8.2 A |
| Full load current fans: | 2.9 A |
| Connection: | Connection terminal block |


Performance graph:

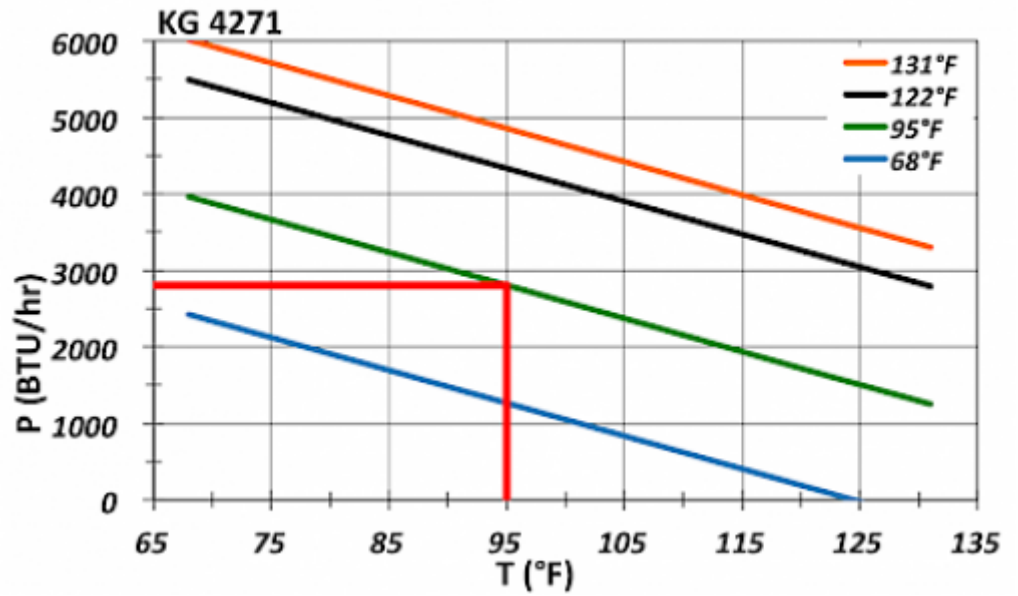

Air flow:

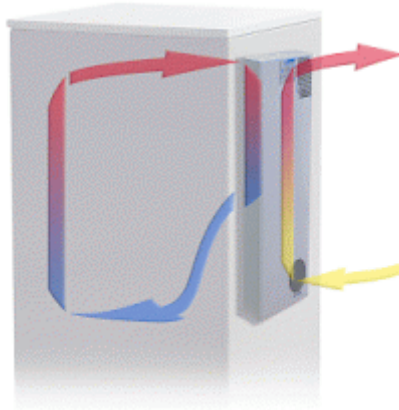

Cut out dimensions:

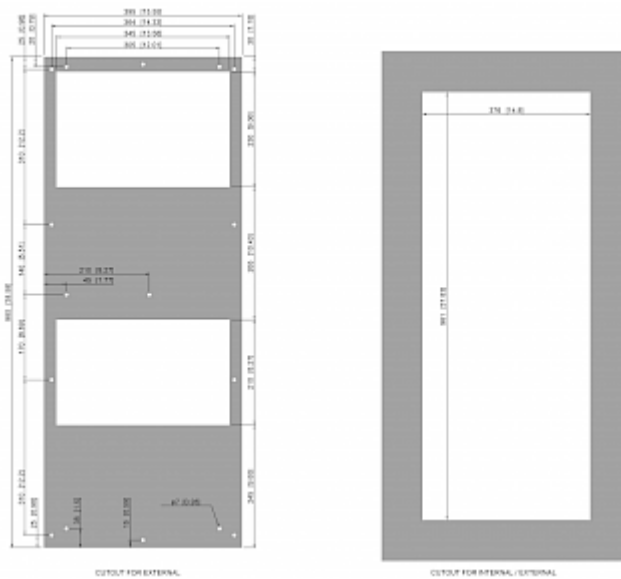

Order Information

| | |
|-----------------------|-----------------------|
| Box dimensions | 1074.5 x 496 x 204 mm |
| Gross weight | 43 kg |
| Taric code | 84158200 |
| GTIN (EAN) | 5350604370999 |