

## Enclosure air conditioner




## Description

|   |                           |
|---|---------------------------|
| <b>Order Number:</b>                    | 43040001                  |
| <b>Brand Name:</b>                      | COMPACT INDOOR            |
| <b>Color:</b>                           | RAL 7035                  |
| <b>Housing Material:</b>                | Mild steel, powder coated |
| <b>Ingress protection to EN 60 529:</b> | TYPE 12                   |
| <b>Approvals:</b>                       | CE, cURus, cULus          |


## Technical data

|  |   |
|--|---|
| <b>Cooling capacity 95F/95F:</b>             | 1230 BTU  |
| <b>Cooling capacity 95F/122F:</b>            | 750 BTU   |
| <b>Compressor type:</b>                      | Reciprocating compressor  |
| <b>Refrigerant / GWP:</b>                    | R134a / 1430  |
| <b>Refrigerant charge:</b>                   | 79 g / 2.78 oz  |
| <b>High / low pressure:</b>                  | 25 / 6 bar<br>365 / 88 psig   |
| <b>Air volume flow (system / unimpeded):</b> | Ambient air circuit: 53 / 147 cfm<br>Cabinet air circuit: 68 / 80 cfm |
| <b>Operating temperature range:</b>          | 50°F - 131°F  |
| <b>Mounting:</b>                             | External  |
| <b>Dimension H x W x D:</b>                  | 19.75 x 11.02 x 7.87 in.  |
| <b>Weight:</b>                               | 40 lbs.   |
| <b>Cut out dimensions:</b>                   | 18.90 x 9.45 in.  |
| <b>Voltage / Frequency:</b>                  | 230 V ~ 50/60 Hz  |
| <b>UL Voltage / Frequency:</b>               | 230 V ~ 60 Hz   |
| <b>Current 95F95F:</b>                       | 1.9 A @ 50 Hz<br>2.0 A @ 60 Hz  |
| <b>Starting current:</b>                     | 6.1 A   |
| <b>Max. current:</b>                         | 2.8 A   |
| <b>Nominal power 95F95F:</b>                 | 335 W @ 50 Hz<br>380 W @ 60 Hz  |
| <b>Max. power:</b>                           | 550 W   |
| <b>Fuse:</b>                                 | 6 A (T)   |
| <b>Short-circuit current rating:</b>         | 5 kA  |
| <b>Connection:</b>                           | Connection terminal block   |


**Performance graph:**

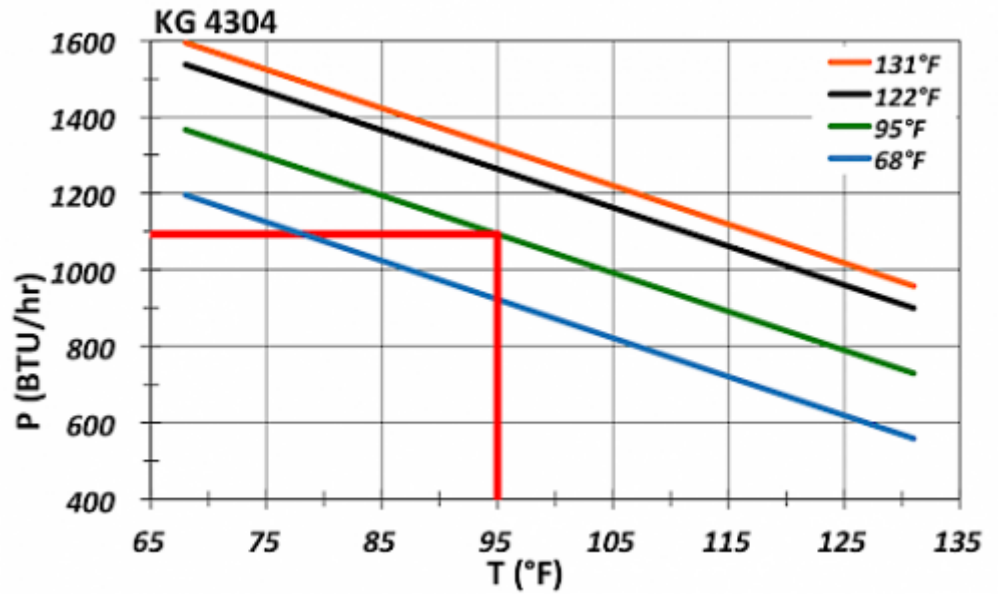

**Air flow:**

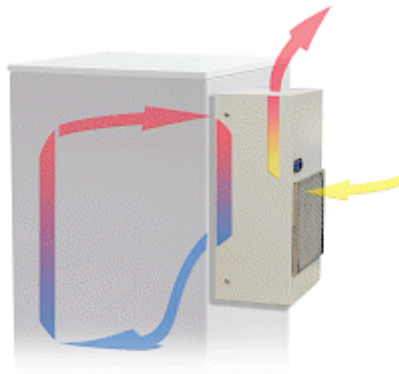

**Cut out Dimensions:**

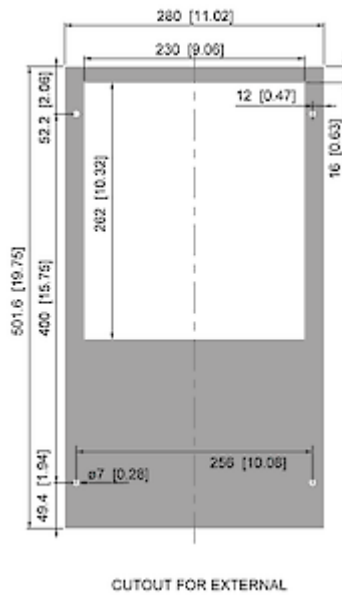

## Order Information

|   |                    |
|---|--------------------|
| <b>Mit Edelstahlgehäuse Bestell Nr.</b> | 4304002            |
| <b>Verpackungsmaße</b>                  | 535 x 323 x 225 mm |
| <b>Bruttogewicht</b>                    | 19 kg              |
| <b>Taric code</b>                       | 84158200           |