

Enclosure air conditioner




Description

| | |
|---|---------------------------|
| Order Number: | 43040001 |
| Brand Name: | COMPACT INDOOR |
| Color: | RAL 7035 |
| Housing Material: | Mild steel, powder coated |
| Ingress protection to EN 60 529: | TYPE 12 |
| Approvals: | CE, cURus, cULus |


Technical data

| | |
|--|---|
| Cooling capacity 95F/95F: | 1230 BTU |
| Cooling capacity 95F/122F: | 750 BTU |
| Compressor type: | Reciprocating compressor |
| Refrigerant / GWP: | R134a / 1430 |
| Refrigerant charge: | 79 g / 2.78 oz |
| High / low pressure: | 25 / 6 bar 365 / 88 psig |
| Air volume flow (system / unimpeded): | Ambient air circuit: 53 / 147 cfm Cabinet air circuit: 68 / 80 cfm |
| Operating temperature range: | 50°F - 131°F |
| Mounting: | External |
| Dimension H x W x D: | 19.75 x 11.02 x 7.87 in. |
| Weight: | 40 lbs. |
| Cut out dimensions: | 18.90 x 9.45 in. |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| UL Voltage / Frequency: | 230 V ~ 60 Hz |
| Current 95F95F: | 1.9 A @ 50 Hz 2.0 A @ 60 Hz |
| Starting current: | 6.1 A |
| Max. current: | 2.8 A |
| Nominal power 95F95F: | 335 W @ 50 Hz 380 W @ 60 Hz |
| Max. power: | 550 W |
| Fuse: | 6 A (T) |
| Short-circuit current rating: | 5 kA |
| Connection: | Connection terminal block |


Performance graph:

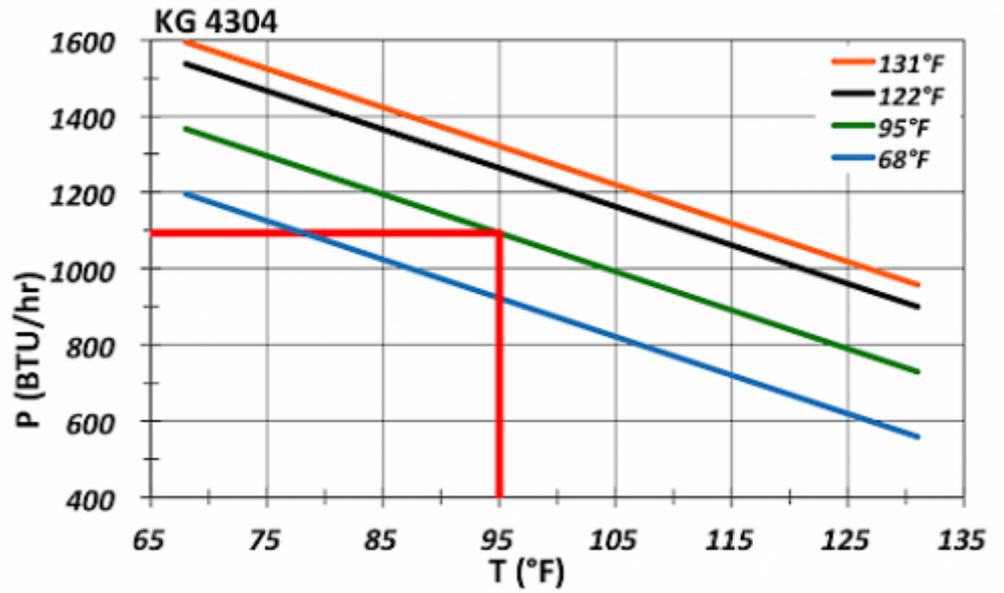

Air flow:

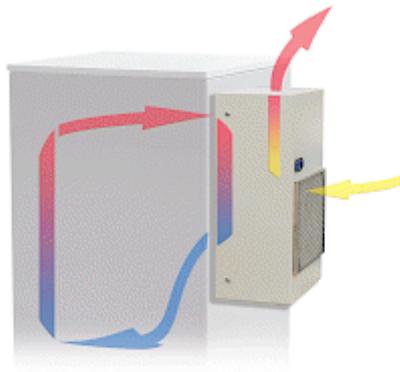

Cut out Dimensions:

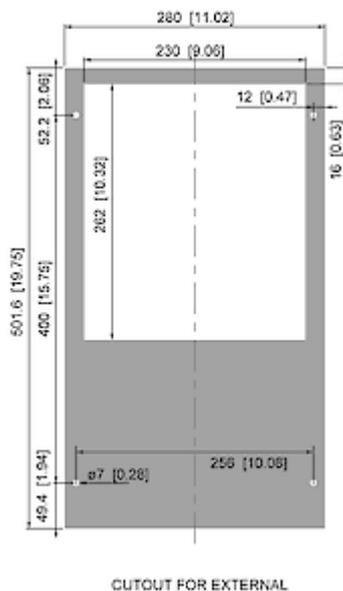

Order Information

| | |
|---|--------------------|
| Mit Edelstahlgehäuse Bestell Nr. | 4304002 |
| Verpackungsmaße | 535 x 323 x 225 mm |
| Bruttogewicht | 19 kg |
| Taric code | 84158200 |