

Enclosure air conditioner




Description

Order Number:	43150001
Brand Name:	COMPACT INDOOR
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection to EN 60 529:	TYPE 12
Approvals:	CE, cURus, cULus


Technical data

Cooling capacity 95F/95F:	5560 BTU
Cooling capacity 95F/122F:	4500 BTU
Compressor type:	Reciprocating compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	420 g / 14.8 oz
High / low pressure:	25.5 / 6 bar 370 / 88 psig
Air volume flow (system / unimpeded):	Ambient air circuit: 280 / 500 cfm Cabinet air circuit: 225 / 324 cfm
Operating temperature range:	68°F - 131°F
Mounting:	External
Dimension H x W x D:	38.6 x 15.5 x 10.2 inch
Weight:	87 lbs.
Cut out dimensions:	36.22 x 13.19 in.
Voltage / Frequency:	230 V ~ 50/60 Hz
UL Voltage / Frequency:	230 V ~ 60 Hz
Current 95F95F:	4.6 A @ 50 Hz 5.1 A @ 60 Hz
Starting current:	21.2 A
Max. current:	5.6 A
Nominal power 95F95F:	800 W @ 50 Hz 920 W @ 60 Hz
Max. power:	1.17 kW
Fuse:	10 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block


Performance graph:

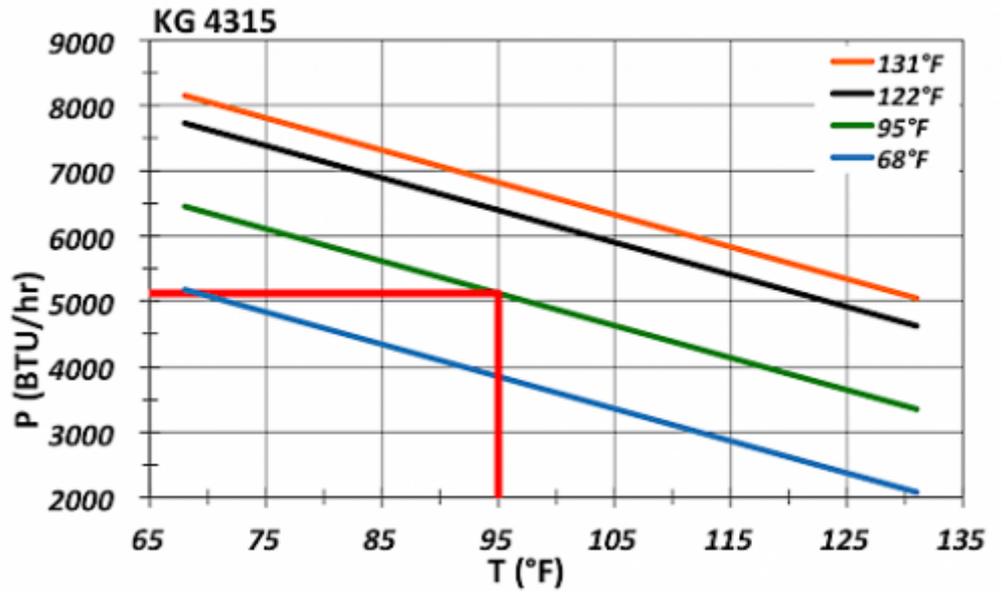

Air flow:

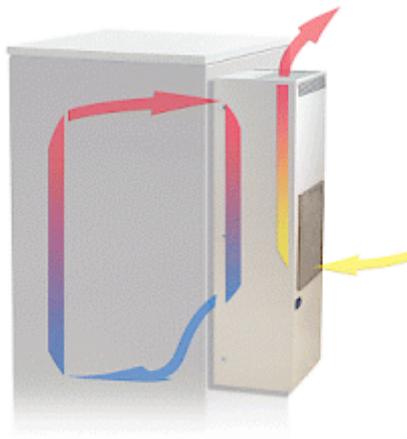

Cut out Dimensions:

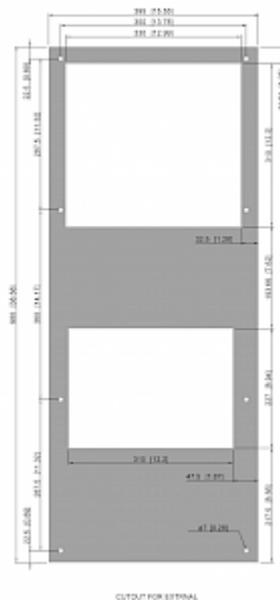

Order Information

Stainless steel housing part no.	4315002
Mit Kondensatverdunstung Bestell Nr.	43150101
Verpackungsmaße	1,015 x 443 x 295 mm
Bruttogewicht	42.5 kg
Taric code	84158200