

Enclosure air conditioner




Description

| | |
|---|---------------------------|
| Order Number: | 43150001 |
| Brand Name: | COMPACT INDOOR |
| Color: | RAL 7035 |
| Housing Material: | Mild steel, powder coated |
| Ingress protection to EN 60 529: | TYPE 12 |
| Approvals: | CE, cURus, cULus |


Technical data

| | |
|--|--|
| Cooling capacity 95F/95F: | 5560 BTU |
| Cooling capacity 95F/122F: | 4500 BTU |
| Compressor type: | Reciprocating compressor |
| Refrigerant / GWP: | R134a / 1430 |
| Refrigerant charge: | 420 g / 14.8 oz |
| High / low pressure: | 25.5 / 6 bar 370 / 88 psig |
| Operating temperature range: | 68°F - 131°F |
| Air volume flow (system / unimpeded): | Ambient air circuit: 280 / 500 cfm Cabinet air circuit: 225 / 324 cfm |
| Mounting: | External |
| Dimension H x W x D: | 38.6 x 15.5 x 10.2 inch |
| Weight: | 87 lbs. |
| Cut out dimensions: | 36.22 x 13.19 in. |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| UL Voltage / Frequency: | 230 V ~ 60 Hz |
| Current 95F95F: | 4.6 A @ 50 Hz 5.1 A @ 60 Hz |
| Starting current: | 21.2 A |
| Max. current: | 5.6 A |
| Nominal power 95F95F: | 800 W @ 50 Hz 920 W @ 60 Hz |
| Max. power: | 1.17 kW |
| Fuse: | 10 A (T) |
| Short-circuit current rating: | 5 kA |
| Connection: | Connection terminal block |


Performance graph:

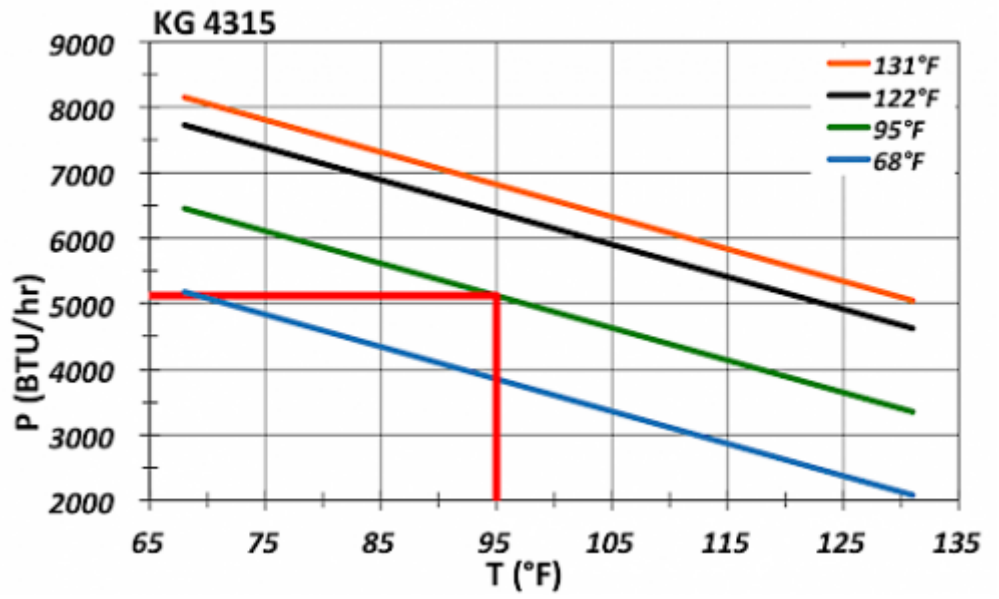

Air flow:

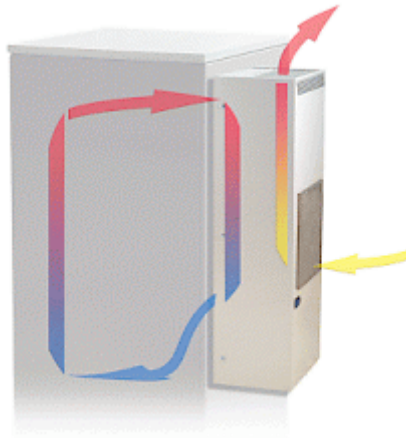

Cut out dimensions:

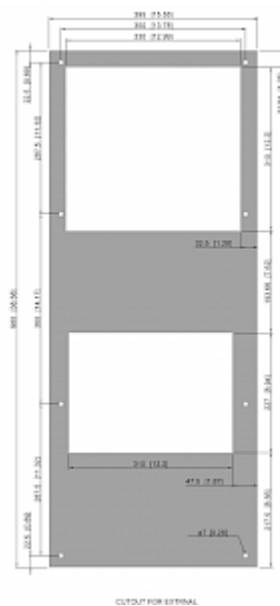

Order Information

| | |
|---|----------------------|
| Stainless steel housing part no. | 4315002 |
| Mit Kondensatverdunstung Bestell Nr. | 43150101 |
| Verpackungsmaße | 1,015 x 443 x 295 mm |
| Bruttogewicht | 42.5 kg |
| Taric code | 84158200 |