

Air to Water Heat Exchanger



Description


Order Number:	2114003
Brand Name:	SLIMLINE HEX
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection to EN 60 529:	IP 54
Approvals:	CE, cURus

Technical data


Cooling capacity 95F/W50F (53 GPH):	2220 BTU
Cooling capacity 95F/W50F (132 GPH):	2560 BTU
Coolant:	Water, light oils or similar
Air volume flow (system / unimpeded):	105 / 271 cfm @ 50 Hz 117 / 315 cfm @ 60 Hz
Operating temperature range:	+34°F - +162°F
Mounting:	Wall mounted
Dimension H x W x D:	15.75 x 8.35 x 3.15 in.
Weight:	9.92 lbs
Voltage / Frequency:	230 V ~ 50/60 Hz
UL Voltage / Frequency:	230 V ~ 50/60 Hz
Rated current:	0.4 A
Starting current:	1 A
Max. current:	0.4 A
Power consumption:	75 W
Max. power:	80 W
Pressure water circuit:	10 bar
Water connection:	Rp 1/4" - inside thread with 2 connectors for pipe internal diameter of 0.39 in.
Fuse:	4 A (T)
Connection:	9.8 ft cable ready for connection

Performance graph:


ΔT = Temperature difference between enclosure air and coolant
 P = Cooling Capacity

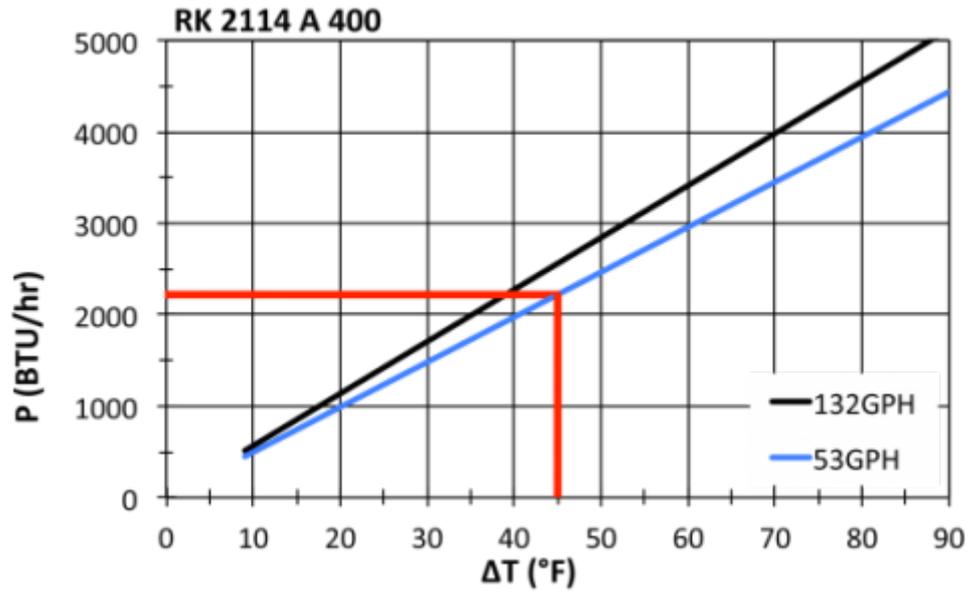

Air flow:

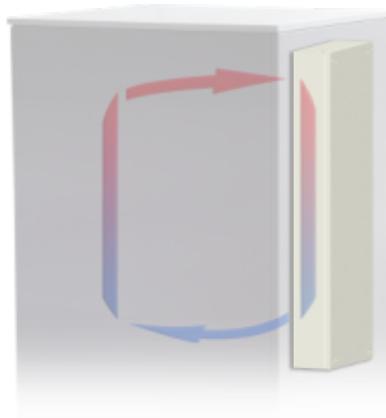

Cut out Dimensions:

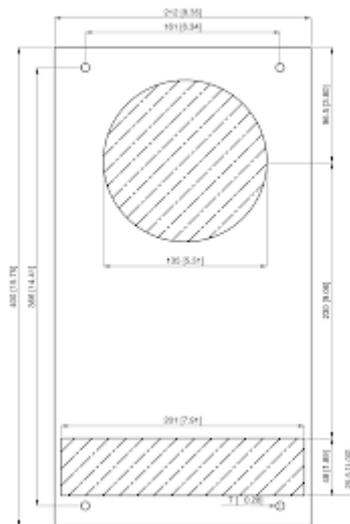

Note:
 Primary dimensions in millimeters.
 Secondary dimensions in inches.

Order Information

Stainless steel housing part no.	21140032
For internal mounting. Note: air outlet in floor panel!	2114002
Verpackungsmaße	538.6 x 249 x 122 mm
Bruttogewicht	6 kg
Taric code	84158300
GTIN (EAN)	5350604210110