

Air to Water Heat Exchanger



Description


Order Number:	2125010
Brand Name:	SLIMLINE HEX
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection to EN 60 529:	NEMA 12
Approvals:	CE

Technical data


Cooling capacity 95F/W50F (53 GPH):	8530 BTU
Cooling capacity 95F/W50F (132 GPH):	10750 BTU (only w/o water flow regulator)
Coolant:	Water, light oils or similar
Air volume flow (system / unimpeded):	294 / 692 cfm @ 50 Hz 311 / 765 cfm @ 60 Hz
Operating temperature range:	+34°F - +162°F
Mounting:	Wall mounted / Internal
Dimension H x W x D:	36.85 x 10.31 x 5.77 in.
Weight:	39.68 lbs
Voltage / Frequency:	230 V ~ 50/60 Hz
Starting current:	1.2 A / 1.3 A
Max. current:	0.7 A / 0.9 A
Max. power:	200 W
Pressure water circuit:	10 bar
Water connection:	Rp 1/4" - inside thread with 2 connectors for pipe internal diameter of 0.39 in.
Fuse:	5 A (T)
Connection:	Connection terminals

Performance graph:


ΔT = Temperature difference between enclosure air and coolant
 P = Cooling Capacity

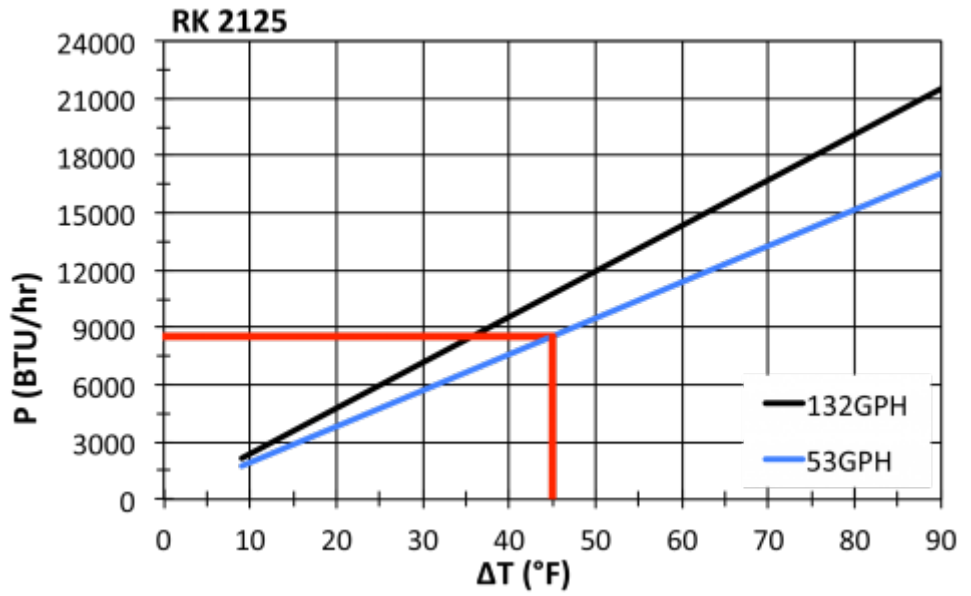

Air flow:

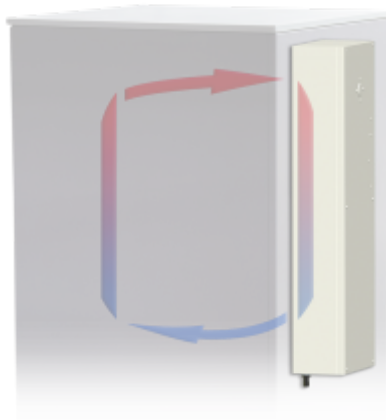

Cut out Dimensions:

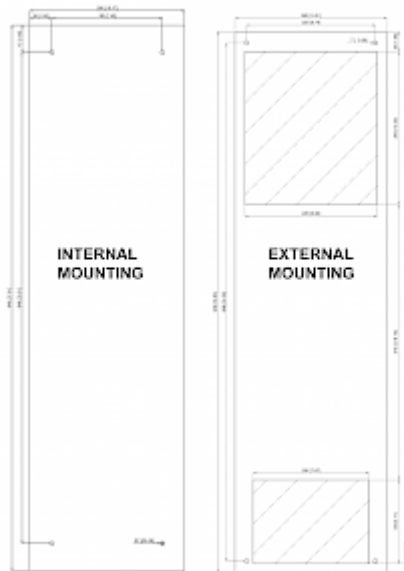

Order Information

Stainless steel housing part no.	2125012
Verpackungsmaße	1033.6 x 279 x 183.5 mm
Bruttogewicht	21 kg
Taric code	84158300
GTIN (EAN)	5350604210752