

Roof Filter Fan




Description

Order Number:	6996A4000
Brand Name:	SOLIFLEX
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection to EN 60 529:	IP 21
Included:	Low noise (1500 m ³ /hr) connector High speed (4000 m ³ /hr) connector Connector for Modbus Thermostat 301120
Approvals:	CE

Technical data


Air volume flow (system / unimpeded):	Low noise: 883 cfm Full Speed: 2354 cfm
Air flow unimpeded IP 54:	1500 / 4000 m ³ /h
Operating temperature range:	-4°F - +131°F
Mounting:	top mounted
Dimension H x W x D:	12.2 x 22 x 22 inch
Weight:	16 kg
Cut out dimensions:	16.14 x 16.14 inch
Voltage / Frequency:	230 V ~ 50/60 Hz
Rated current:	Geräuscharm: 0.17 A High Speed: 1.09 A
Power consumption:	Geräuscharm: 40 W High Speed: 250 W
Filter class (ISO 16890):	Optional Aluminium filter
Noise level:	Geräuscharm: 55 dB(A) High Speed: 70 dB(A)
Connection:	4-poliger Push-fit Anschlußstecker Fan Status (optional) - 2-poliger Push-fit Stecker Speed Control / Modbus (optional) 5-poliger Push-fit Stecker

Performance graph:

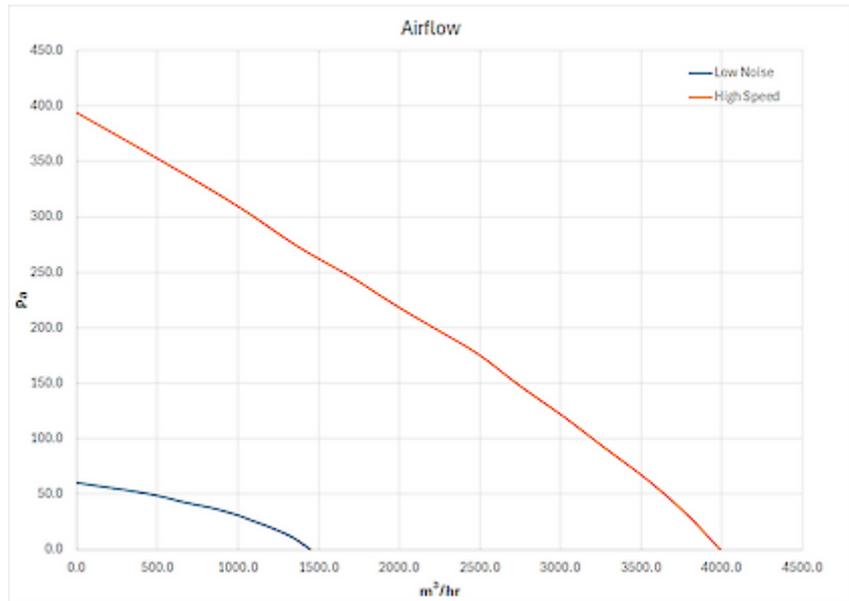


Air flow:

Q = Air flow [m³/h]
P = Static pressure [Pa]

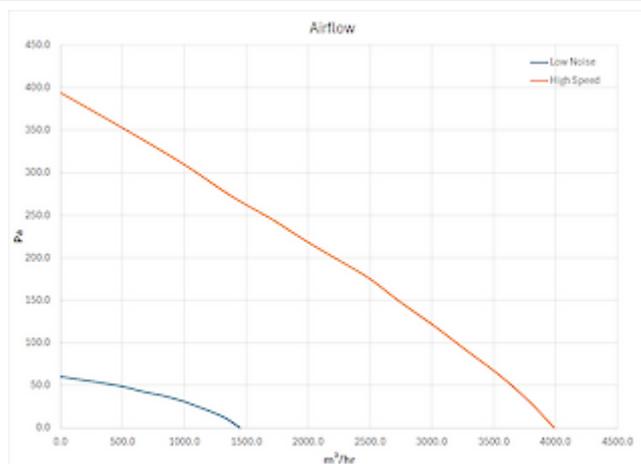

Cut out Dimensions:

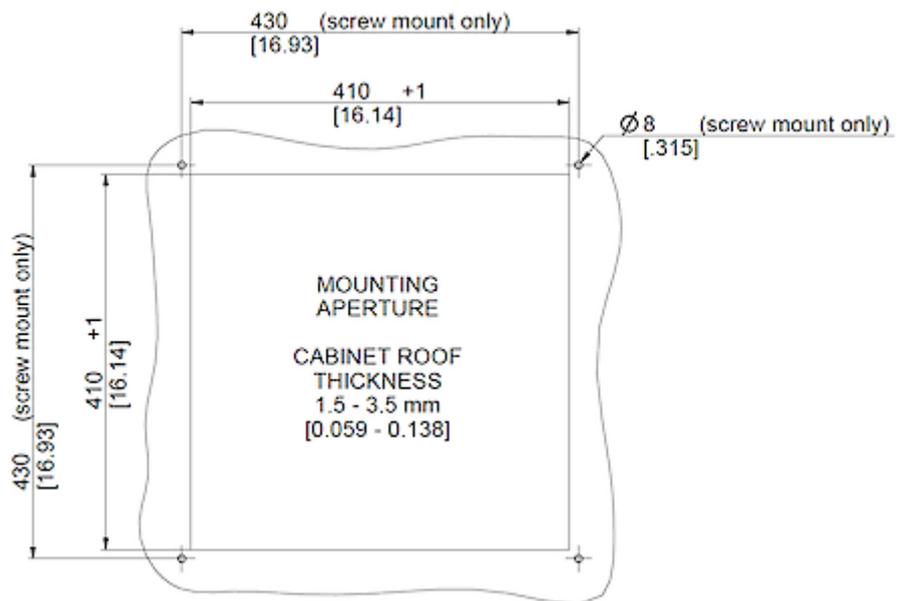

Order Information

Taric code

84145915
