

Enclosure air conditioner




Description

Order Number:	43202001
Brand Name:	COMPACT INDOOR
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection to EN 60 529:	TYPE 12
Approvals:	CE, cURus, cULus


Technical data

Cooling capacity 95F/95F:	6820 BTU
Cooling capacity 95F/122F:	5630 BTU
Compressor type:	Rotary piston compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	440 g / 15.5 oz
High / low pressure:	24 / 6 bar 348 / 88 psig
Air volume flow (system / unimpeded):	Ambient air circuit: 383 / 706 cfm Cabinet air circuit: 277 / 500 cfm
Operating temperature range:	50°F - 131°F
Mounting:	External
Dimension H x W x D:	38.6 x 15.5 x 10.2 inch
Weight:	97 lbs.
Cut out dimensions:	36.22 x 13.18 inch
Voltage / Frequency:	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
UL Voltage / Frequency:	400/460 V ~ 60 Hz 3~
Current 95F95F:	3.1 A @ 50 Hz 2.7 A @ 60 Hz
Starting current:	5.7 A / 6.4 A
Max. current:	3.6 A / 3.2 A
Nominal power 95F95F:	1.26 kW @ 400 / 460 V - 50 Hz 1.35 kW @ 400 / 460 V - 60 Hz
Max. power:	1.42 kW
Fuse:	3 x 6 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block


Performance graph:

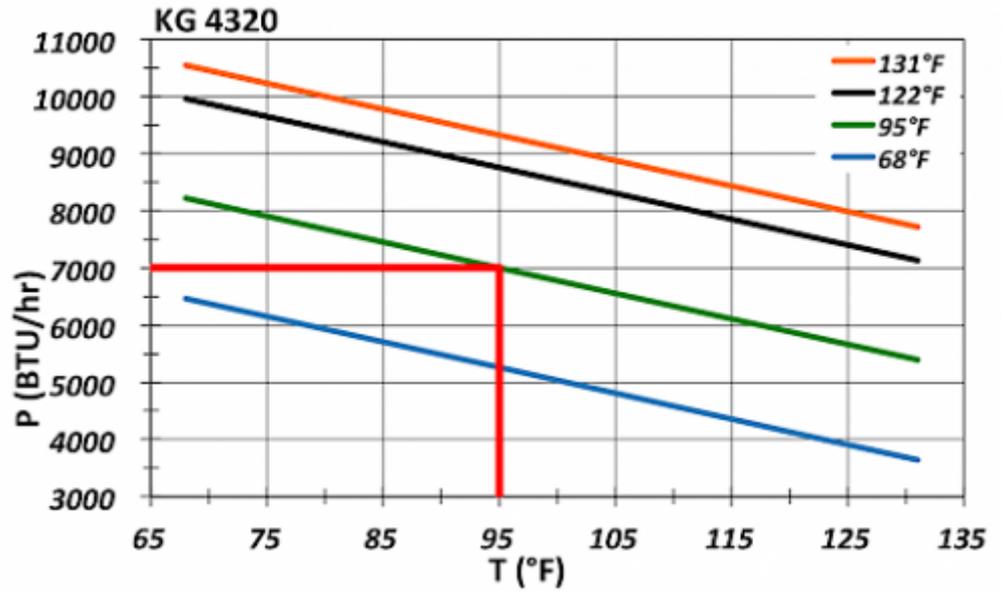

Air flow:

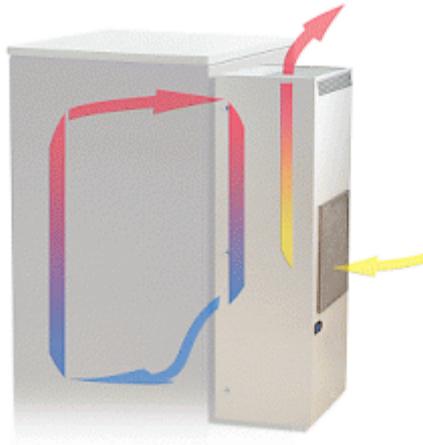

Cut out Dimensions:

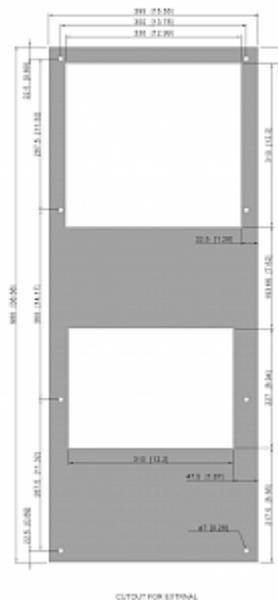

Order Information

Stainless steel housing part no.	4320202
Mit Kondensatverdunstung Bestell Nr.	43202101
Verpackungsmaße	1,015 x 443 x 295 mm
Bruttogewicht	47 kg
Taric code	84158200