

Outdoor Radar Dome Air Conditioner




Description

| | |
|---|---|
| Order Number: | 4410918 |
| Brand Name: | Compact Outdoor |
| Color: | RAL 7035 |
| Housing Material: | Stainless steel AISI 304 (V2A) |
| Ingress protection to EN 60 529: | IP 56 |
| Note: | The unit has an internal MCB (miniature circuit breaker) accessible by removing the front cover |
| Approvals: | CE |


Technical data

| | |
|--|--|
| Cooling capacity 95F/95F: | 5460 BTU (104F/113F) |
| Cooling capacity 95F/122F: | 5460 BTU (104F/113F) |
| Compressor type: | Rotary piston compressor |
| Refrigerant / GWP: | R134a / 1430 |
| Refrigerant charge: | 750 g / 26.5 oz |
| High / low pressure: | 21 / 6 bar 305 / 88 psig |
| Air volume flow (system / unimpeded): | Ambient air circuit: 312 / 706 cfm Cabinet air circuit: 220 / 324 cfm |
| Operating temperature range: | +68°F - +122°F |
| Mounting: | Standalone |
| Dimension H x W x D: | 21.6 x 21.9 x 19.7 inch |
| Weight: | 110 lbs. |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| Current 95F95F: | 4.2 A |
| Starting current: | 15.5 A |
| Max. current: | 4.7 A |
| Nominal power 95F95F: | 1.02 kW |
| Max. power: | 1.02 kW |
| Fuse: | 10 A (T) |
| Short-circuit current rating: | 5 kA |
| Connection: | 2 x 3 m 180 mm flexible plastic duct |

Performance graph:

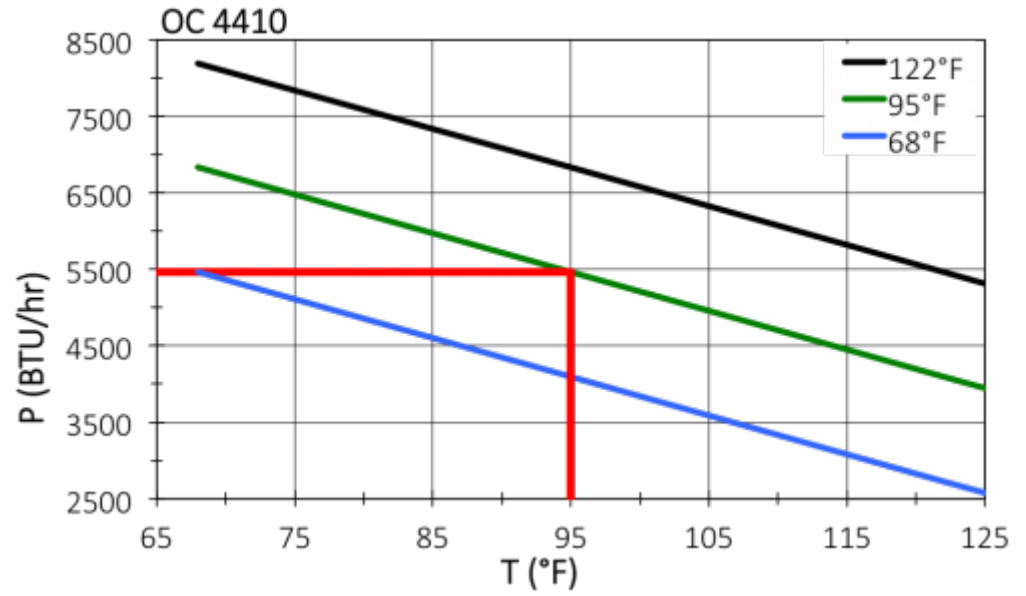

Cut out Dimensions:

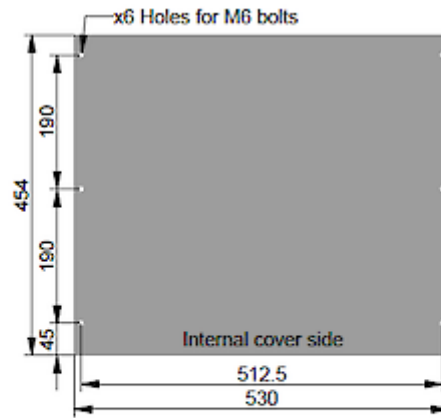

Order Information

| | |
|-------------------|---------------|
| Taric code | 84158200 |
| GTIN (EAN) | 5350604321816 |