

Thermoelectric cooler




Description

Order Number:	388709-3
Brand Name:	SOLITHERM PELTIER
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection to EN 60 529:	IP 66 / UL Type 12, 4, 4X
Note:	Das Anziehdrehmoment der Schrauben muß 4.5 Nm betragen. Niehoff Material Nr. 388709-3
Approvals:	CE, cURus


Technical data

Cooling capacity 95F/95F:	510 BTU
Air volume flow (system / unimpeded):	Ambient air circuit: 70 / 153 cfm Cabinet air circuit: 35 / 100 cfm
Operating temperature range:	-4°F - 158°F
UL temperature range:	-4°F - 149°F
Mounting:	Recessed
Dimension H x W x D:	306 x 203 x 160 (86+74) mm
Weight:	20 lbs.
Cut out dimensions:	260 x 160 mm
Voltage / Frequency:	24 V DC
Current 95F95F:	7.5 A
Starting current:	11.3 A
Max. current:	8.6 A
Nominal power 95F95F:	180 W
Max. power:	207 W
Fuse:	12 A (T)
Connection:	Connection terminal block


Performance graph:

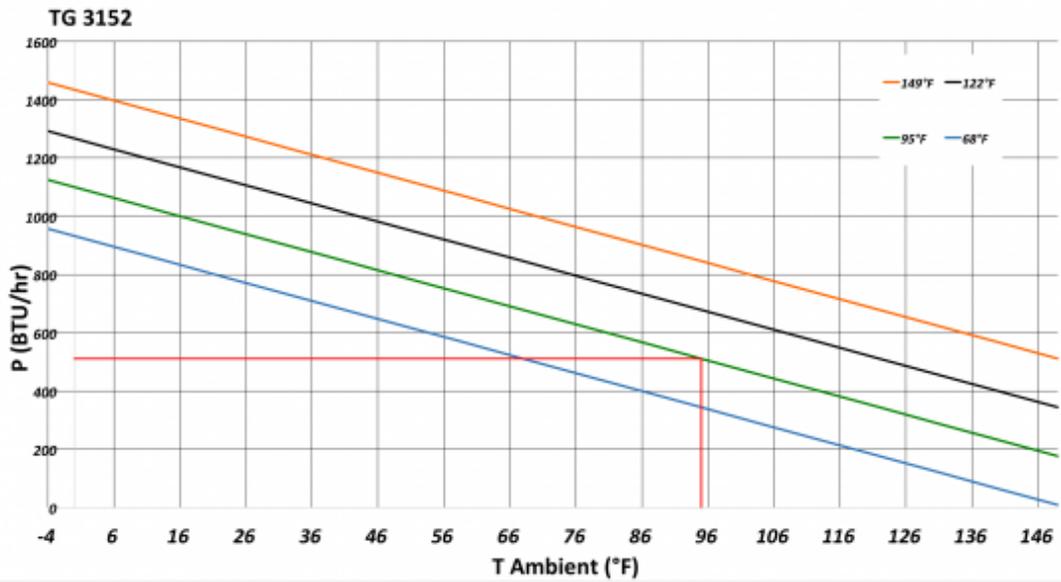

Air flow:

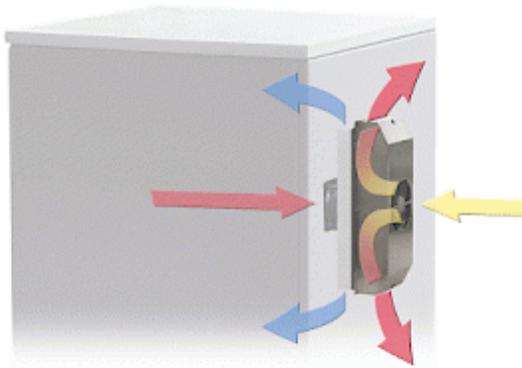

Cut out Dimensions:

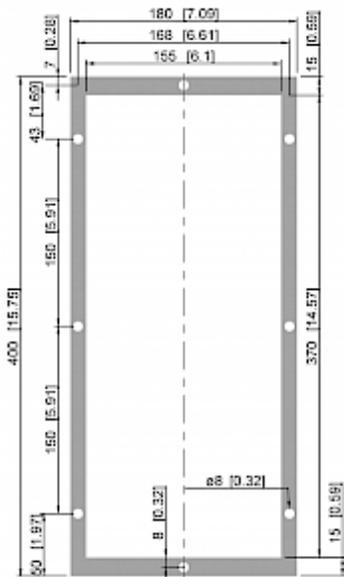

Order Information

Stainless steel AISI 316 (V4A) housing part no.	31523034
Verpackungsmaße	486.6 x 205 x 183.5 mm
Bruttogewicht	11 kg
Taric code	84158300