

Pre-set thermostat NO

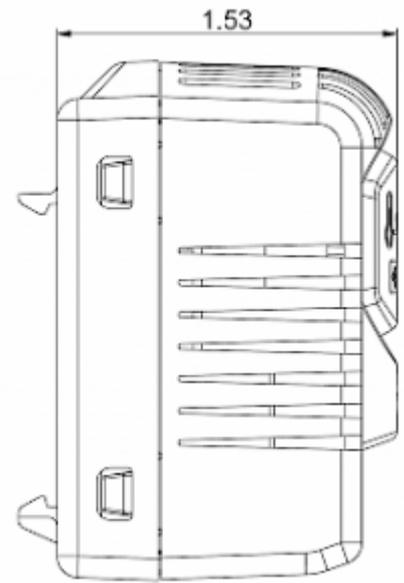
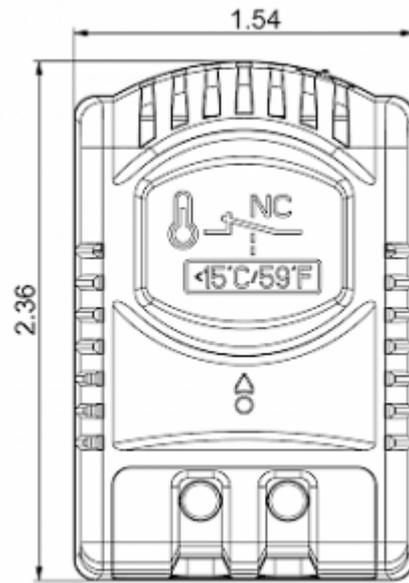


Description

| | |
|---|----------------------------|
| Order Number: | 301030 |
| Brand Name: | SOLIFLEX |
| Color: | Grey RAL 7011 |
| Housing Material: | PC plastic |
| Ingress protection to EN 60 529: | IP 20 |
| Note: | Hyst.10±2K / Sw.Pt.tol ±2K |
| Approvals: | CE, cURus |
| UL File Number: | E358385 |

Technical data

| | |
|-------------------------------------|--|
| Operating temperature range: | -40°F - 176°F |
| Setting range: | ON 35°C/95°F - OFF 25°C/77°F |
| Mounting: | DIN rail 1.38 inch |
| Dimension H x W x D: | 12.36 x 1.54 x 1.53 inch |
| Weight: | ~ 1.76 oz. |
| Voltage / Frequency: | max. 250 V AC 16 A(res) / 10 A(ind) max. 72 V DC max. 30 W |
| Lifetime: | 100,000 hrs. |
| Connection: | 2-pole terminal, clamping torque 0.5 Nm max. solid wire - 2.5 mm ² max. stranded wire - 1.5 mm ² max. |

Cut out Dimensions:

Order Information

| | |
|------------------------|---------------|
| Zolltarifnummer | 90321080 |
| EAN Nummer | 5350604010062 |