

## Pre-set thermostat NO

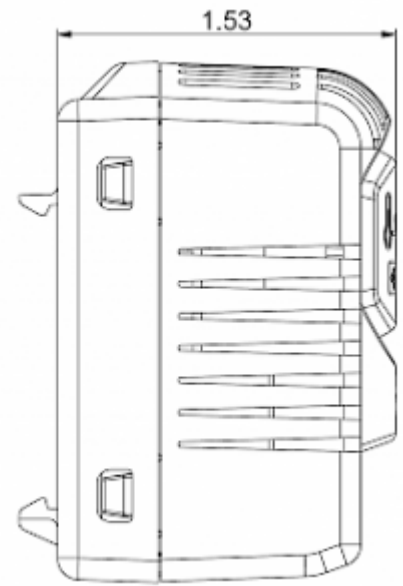
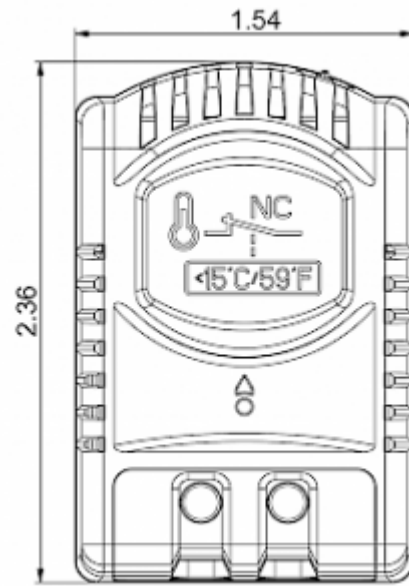


### Description

<b>Order Number:</b>	301040
<b>Brand Name:</b>	SOLIFLEX
<b>Color:</b>	Grey RAL 7011
<b>Housing Material:</b>	PC plastic
<b>Ingress protection to EN 60 529:</b>	IP 20
<b>Note:</b>	Hyst.10±2K / Sw.Pt.tol ±2
<b>Approvals:</b>	CE, cURus
<b>UL File Number:</b>	E358385

## Technical data

<b>Operating temperature range:</b>	-40°F - 176°F
<b>Setting range:</b>	ON 50°C/122°F - OFF 40°C/104°F
<b>Mounting:</b>	DIN rail 1.38 inch
<b>Dimension H x W x D:</b>	12.36 x 1.54 x 1.53 inch
<b>Weight:</b>	~ 1.76 oz.
<b>Voltage / Frequency:</b>	max. 250 V AC 16 A(res) / 10 A(ind) max. 72 V DC max. 30 W
<b>Lifetime:</b>	30k Cycles
<b>Connection:</b>	2-pole terminal, clamping torque 0.5 Nm max. solid wire - 2.5 mm <sup>2</sup> max. stranded wire - 1.5 mm <sup>2</sup> max.

**Cut out Dimensions:**

## Order Information

<b>Zolltarifnummer</b>	90321080
<b>EAN Nummer</b>	5350604010086