

Enclosure air conditioner



Description

Order Number:	850320001
Brand Name:	SLIMLINE PRO
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection to EN 60 529:	Type 3, 3R, 12, 4
Approvals:	CE, cURus, cULus

Technical data

Cooling capacity 95F/95F:	350 W @ 50 Hz 380 W @ 60 Hz
Cooling capacity 95F/122F:	685 BTU @ 50 Hz 715 BTU @ 60 Hz
EER 95F95F:	1.13
Compressor type:	Rotary piston
Refrigerant / GWP:	R 513A / 630
Refrigerant charge:	100 g / 3.5 oz
High / low pressure:	28 / 6 bar 406 / 88 psi
Air volume flow (system / unimpeded):	Ambient air circuit: 225 / 408 m ³ /h Cabinet air circuit: 122 / 180 m ³ /h
Operating temperature range:	50°F - 140°F
UL temperature range:	50°F - 140°F
Mounting:	Wall mounted / recessed
Dimension H x W x D:	600 x 250 x 187.6 (48.6+139) mm
Weight:	34.2 lbs
Voltage / Frequency:	400/460 V - 50/60 Hz 2~
UL Voltage / Frequency:	460 V / 60Hz 2~
Current 95F95F:	0.9 A @ 50 Hz 0.9 A @ 60 Hz
Starting current:	2.0 A
Max. current:	1.0 A
Nominal power 95F95F:	310 W @ 50 Hz 310 W @ 60 Hz
Max. power:	380 W
Fuse:	15 A (T)
Max circuit ampacity:	15 A
Short-circuit current rating:	5 kA
Rated current compressor:	0.6 A
Full load current fans:	0.12 A


Connection:

4 - poliger Stecker für Versorgungsspannung


5 - poliger Stecker für Signale

3 - poliger Stecker für RS485

Performance graph:

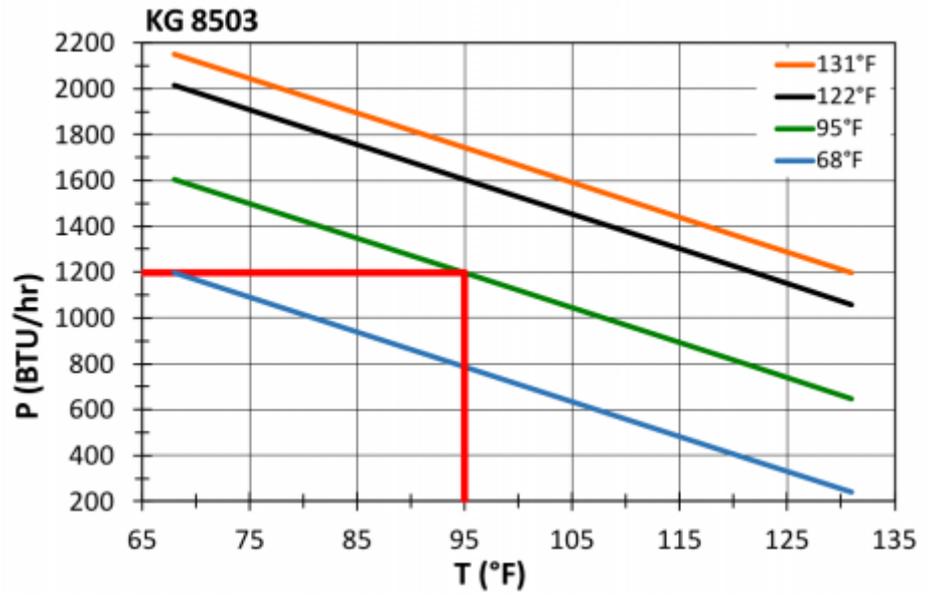

Cut out Dimensions:

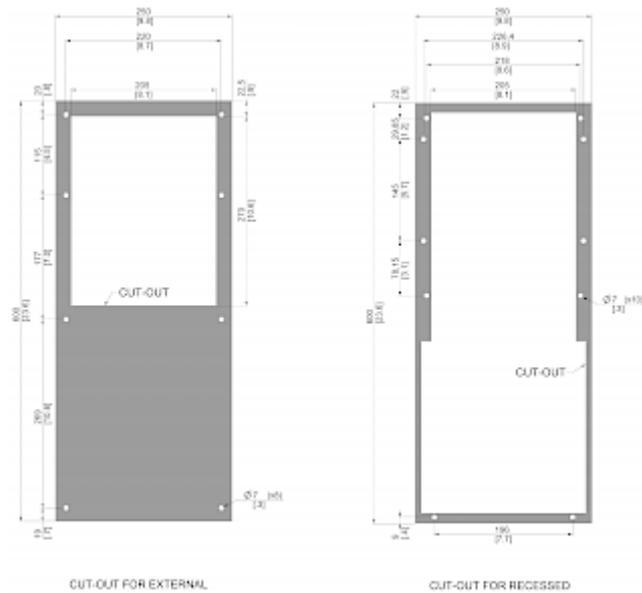

Order Information

Box dimensions	692 x 285 x 242 mm
Gross weight	17 Kg
Taric Code	84158200
GTIN (EAN)	5350604390003