

## Thermoelectric cooler




## Description

<b>Order Number:</b>	6105325
<b>Brand Name:</b>	SOLITHERM PELTIER
<b>Housing Material:</b>	Stainless steel AISI 304 (V2A)
<b>Ingress protection to EN 60 529:</b>	IP 66 / UL Type 12, 4, 4X
<b>Included:</b>	Kondensatablaufstutzen
<b>Note:</b>	The torque for the mounting nuts should be 4.5 Nm
<b>Approvals:</b>	CE, cURus


## Technical data

<b>Cooling capacity 95F/95F:</b>	340 BTU
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 75 / 125 cfm Cabinet air circuit: 27 / 53 cfm
<b>Operating temperature range:</b>	-4°F - 149°F
<b>UL temperature range:</b>	-20°C - 65°C
<b>Mounting:</b>	External (with frame)
<b>Dimension H x W x D:</b>	11 x 13.9 x 6.9 (4.2 + 2.7) inch
<b>Weight:</b>	24 lbs.
<b>Cut out dimensions:</b>	350 x 280 mm
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>Current 95F95F:</b>	0.5 A
<b>Starting current:</b>	0.8 A
<b>Max. current:</b>	0.6 A
<b>Nominal power 95F95F:</b>	125 W
<b>Max. power:</b>	139 W
<b>Fuse:</b>	1 A (T)
<b>Connection:</b>	4 pole power connector 5 pole connector for signals

**Performance graph:**

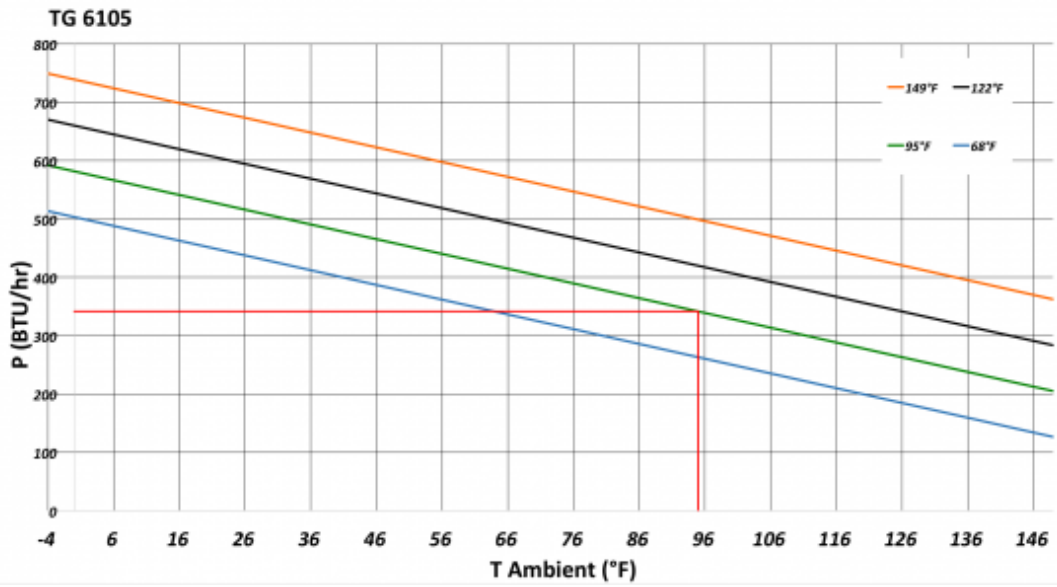

**Cut out Dimensions:**

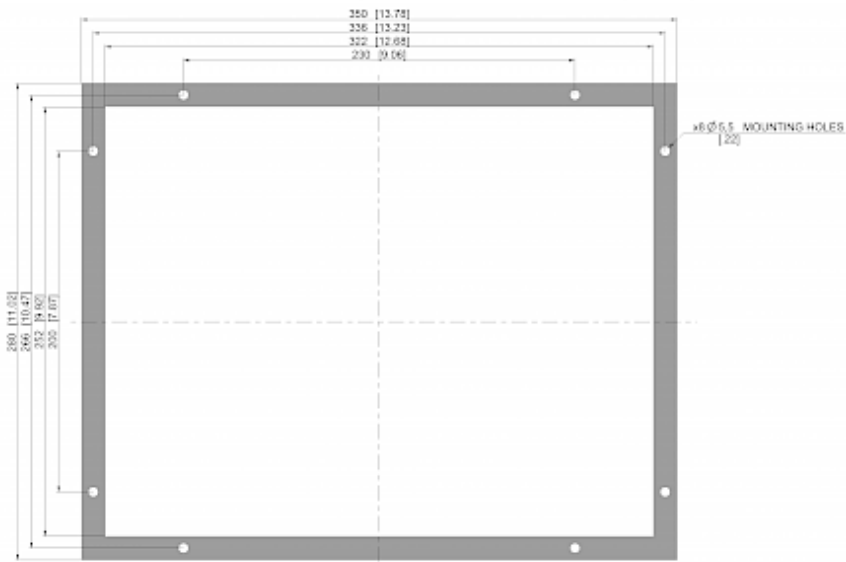

## Order Information

<b>Stainless steel AISI 316 (V4A) housing with chromed heat sinks part no.</b>	61053254
<b>Verpackungsmaße</b>	314 x 436 x 183.5 mm
<b>Bruttogewicht</b>	13.1 kg
<b>Taric code</b>	84158300