

Thermoelectric cooler




Description

Order Number:	6105325
Brand Name:	SOLITHERM PELTIER
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress protection to EN 60 529:	IP 66 / UL Type 12, 4, 4X
Included:	Kondensatablaufstutzen
Note:	The torque for the mounting nuts should be 4.5 Nm
Approvals:	CE, cURus


Technical data

Cooling capacity 95F/95F:	340 BTU
Air volume flow (system / unimpeded):	Ambient air circuit: 75 / 125 cfm Cabinet air circuit: 27 / 53 cfm
Operating temperature range:	-4°F - 149°F
UL temperature range:	-20°C - 65°C
Mounting:	External (with frame)
Dimension H x W x D:	11 x 13.9 x 6.9 (4.2 + 2.7) inch
Weight:	24 lbs.
Cut out dimensions:	350 x 280 mm
Voltage / Frequency:	230 V ~ 50/60 Hz
Current 95F95F:	0.5 A
Starting current:	0.8 A
Max. current:	0.6 A
Nominal power 95F95F:	125 W
Max. power:	139 W
Fuse:	1 A (T)
Connection:	4 pole power connector 5 pole connector for signals

Performance graph:

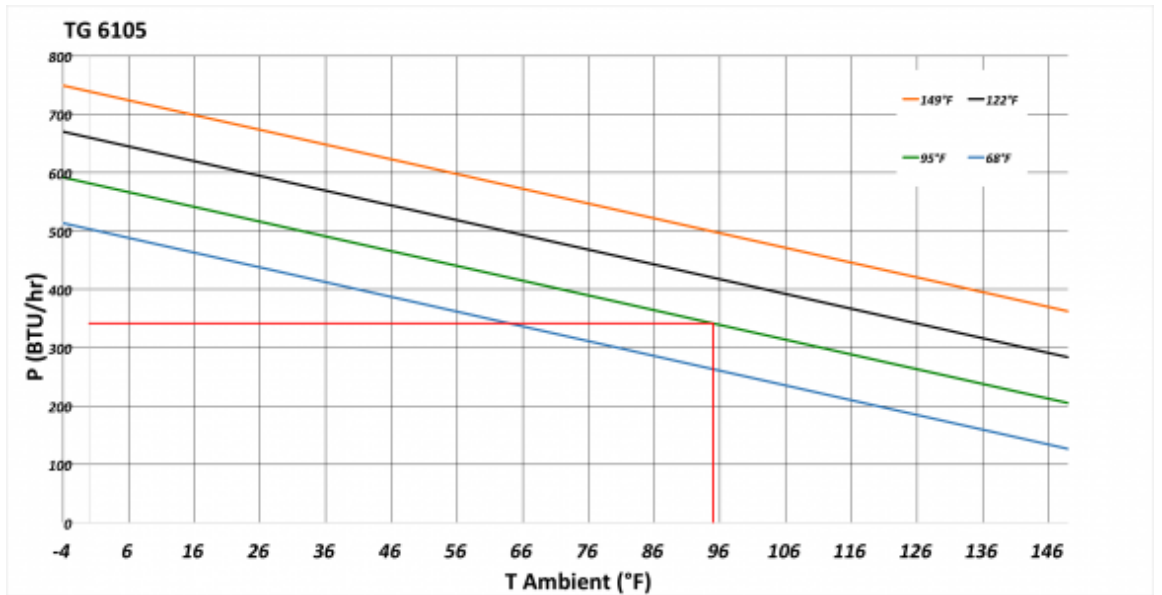

Cut out Dimensions:

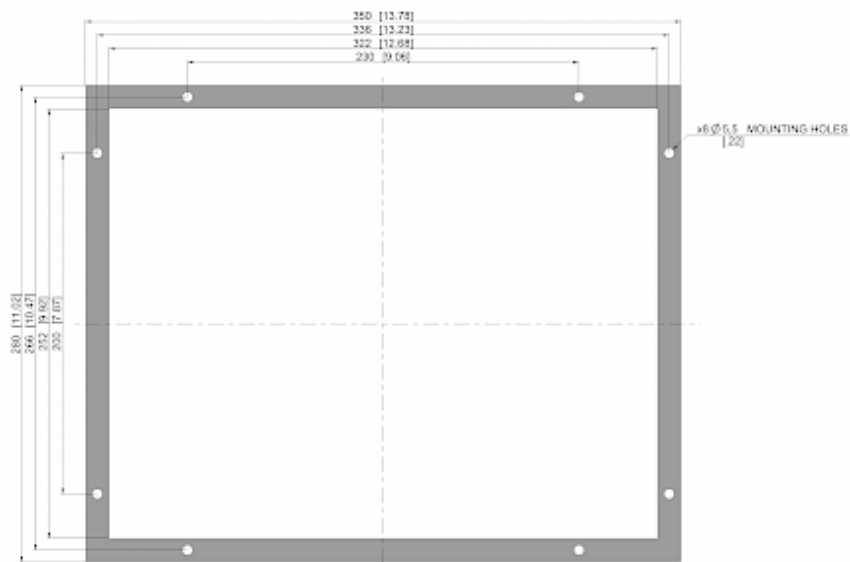

Order Information

Stainless steel AISI 316 (V4A) housing with chromed heat sinks part no.	61053254
Verpackungsmaße	314 x 436 x 183.5 mm
Bruttogewicht	13.1 kg
Taric code	84158300